

L8513 (Mid-Range Diesel)
GVWR WITH STANDARD EQUIPMENT – 31,000 LBS.
 (Consult Truck Selection Section of the Data Book to Compute GVWR with Optional Equipment)
113" BBC - 4x2
 GCWR's – See L/LT Models, Page 1

†Maximum GVWR (lbs.) for Specific Wheelbase-Frame Combinations and Warranty					
	Frame Code For On-Highway Service Only			Frame Code For On-Off Highway Service	
	40E700	40E900 ¹	40FA00	40E900	40FA00
WB	10.76 SM	13.3 SM	15.9 SM	13.3 SM	15.9 SM
	120K PSI	120K PSI	120K PSI	120K PSI	120K PSI
148	35,000 ³	35,000 ³	41,000 ⁶	35,000 ³	39,000 ⁵
160-196	N.A.	35,000 ³	41,000 ⁶	N.A.	37,600 ⁴
208- 244	N.A.	35,000 ³	39,000 ⁵	N.A.	37,600 ⁴

† Refer to Introduction Section page 1, **IMPORTANT** note, for frame/vehicle application service.

Actual GAWR is determined by front/rear axle, suspension, and tire & wheel selections in addition to these frame ratings.

¹ Std. Frame

³ 12,000 lb. max. front axle

⁴ 14,600 lb. max. front axle

⁵ 16,000 lb. max. front axle


⁶ 18,000 lb. max. front axle

Dimensions in Inches – 113 in. BBC*						Base Curb Weight (lbs.)		
WB	CA	Truck AF	Tractor AF ¹	Truck OAL	Tractor OAL	Front	Rear	Total
148	84	58	37	255	234	6293	4006	10245
160	96	63	37	272	246	6168	4128	10296
172	108	63	37	284	258	6113	4220	10333
184	120	63	37	296	270	6081	4314	10395
190	126	75	37	314	276	6061	4385	10446
196	132	75	37	320	282	6061	4440	10501
208	144	75	37	332	294	6031	4508	10539
220	156	90	37	359	306	6009	4651	10660
232	168	102	37	383	318	5990	4740	10730
244	180	114	37	407	330	5982	4840	10822

* Dimensions are for base models w/standard equipment.

¹ Tractor AF is 40" with 52" springs

Weights are approximate and include minimum required equipment, water and oil (less fuel)

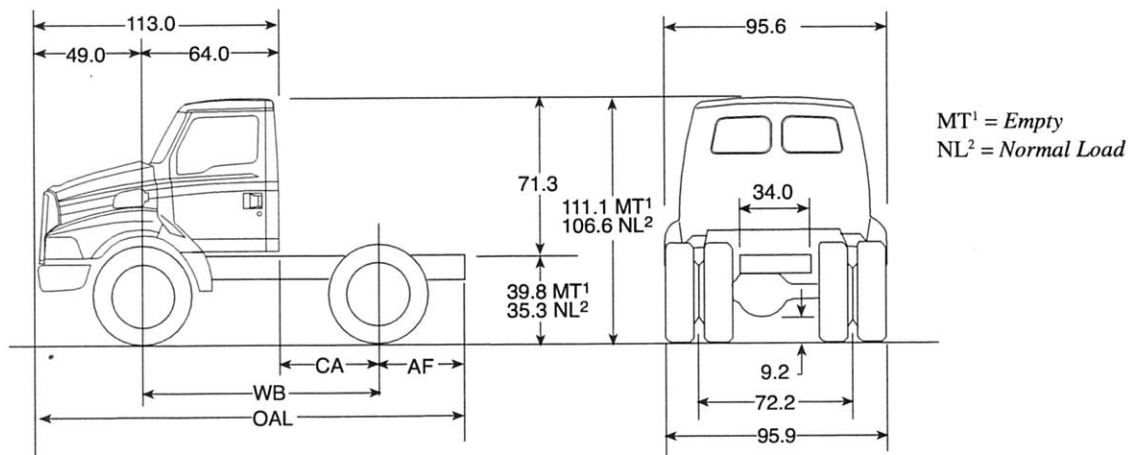

NOTE: Dimensions do not include cab clearance and identification lights.

Note: Recommend adequate tires for axle loadings. See Tires/Wheels/Wheel Equip. Section of Component Information Data Book. All capacity ratings shown represent on-highway application.

LT8513 (Mid-Range Diesel)
GVWR WITH STANDARD EQUIPMENT – 44,000 LBS.
 (Consult Truck Selection Section of the Data Book to Compute GVWR with Optional Equipment)
113" BBC - 6x4
 GCWR's – See L/LT Models, Page 1

Maximum GVWR (lbs.) for Specific Wheelbase-Frame Combinations and Warranty					
Frame Code For On-Highway Service Only					
WB	40E900 ¹ 13.3 SM 120K PSI	40FA00 15.9 SM 120K PSI	40FB00 20.5 SM 120K PSI	40FC00 27 SM 120 PSI	40FD00 30 SM 120 PSI
148	46,000 ²	60,000 ⁶	N.A.	N.A.	N.A.
160-172	46,000 ²	56,000 ^{4,5}	56,000 ^{4,5}	66,000	66,000
184-244	46,000 ²	54,600 ³	56,000 ^{4,5}	66,000	66,000

Actual GAWR is determined by front/rear axle, suspension, and tire & wheel selections in addition to these frame ratings.

¹ Std. Frame

² 12,000 lb. max. front axle

³ 14,600 lb. max. front axle

⁴ 16,000 lb. max. front axle

⁵ Avail. axle combinations allowed: 12K/46K or 16K/40K.

⁶ Avail. axle combinations allowed: 12K/46K or 20K/40K.

Dimensions in Inches – 113 in. BBC*					
WB	CA	AF ¹	AF ¹	OAL	OAL
148	84	60	60	257	257
160	96	63	60	272	269
172	108	63	60	284	281
184	120	63	60	296	293
190	126	75	60	314	299
196	132	75	60	320	305
208	144	75	60	332	317
220	156	90	60	359	329
232	168	102	60	383	341
244	180	114	60	407	353

* Dimensions are for base models w/standard equipment.

¹ Minimum AF is 64" for all 60", 55" and 59" Axle Spacing.

Base Curb Weight (lbs.)		
Front	Rear	Total
6786	6073	12859
6770	6134	12904
6769	6196	12965
6775	6263	13038
6778	6313	13091
6777	6332	13109
6788	6381	13169
6793	6513	13306
6794	6580	13374
6809	6656	13465

Weights are approximate and include minimum required equipment, water and oil (less fuel)

Maximum GVWR (lbs.) for Specific Wheelbase-Frame Combinations and Warranty							
Frame Code For On-Off Highway Service & Severe Duty Non-Mixer						Frame Code For Mixer Service	
WB	40FA00 15.9 SM 120K PSI	40FE00 ⁶ 20.25 SM 125K PSI	40FB00 20.5 SM 120K PSI	40FC00 27 SM 120K PSI	40FD00 30 SM 120K PSI	40FC00 27 SM 120K PSI	40FD00 30 SM 120K PSI
148	52,000 ²	64,000 ⁵	N.A.	N.A.	N.A.	N.A.	N.A.
160	52,000 ²	64,000 ⁵	56,000 ⁴	66,000	66,000	N.A.	N.A.
172-208	46,000 ²	64,000 ⁵	54,600 ³	66,000	66,000	56,000 ^{4,8}	66,000
220-244	46,000 ²	58,000 ⁵	54,600 ³	60,000 ⁷	66,000	N.A.	N.A.

Actual GAWR determined by front/rear axle, suspension, and tire & wheel selections in addition to these frame ratings.

² 12,000 lb. max. front axle

³ 14,600 lb. max. front axle

⁴ 16,000 lb. max. front axle

⁵ 18,000 lb. max. front axle


⁶ Avail. as extended frame only

⁷ Avail. axle combinations allowed:

12K/46K or 20K/40K

⁸ Avail. axle combinations allowed:

12K/46K or 16K/40K

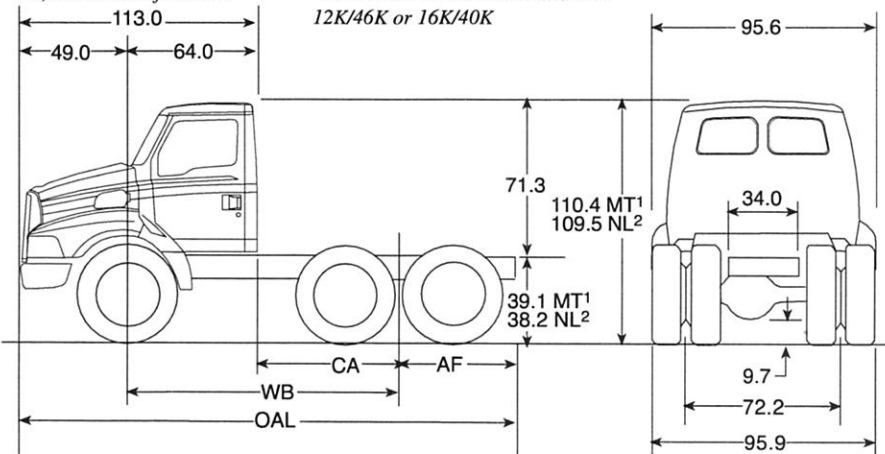

MT¹ = Empty

NL² = Normal Load

NOTE: Dimensions do not include cab clearance and identification lights.

Note: Recommend adequate tires for axle loadings. See Tires/Wheels/Wheel Equip. Section of Component Information Data Book. All capacity ratings shown represent on-highway application.

L / LT8513 — 113" BBC

MID-RANGE DIESEL — STANDARD EQUIPMENT

		4x2	6x4
		L8513	LT8513
SALES CODE	10 — AXLE, FRONT		
10AG00	10,000 lb.	S	S
	11 — AXLE, REAR		
	21,000 lb. Single-Speed Meritor RS-21-145	S	
	34,000 lb. Single-Speed Meritor RT-34-144		S
	13 — AXLE EQUIPMENT		
STD.	Brake Drums, Front & Rear — Full Cast	S	S
	Bushings, Kingpin, Front Axle Bronze	S	S
STD.	Differential, Inter-Axle — Full Locking Driver Controlled		S
13A900	Differential, Main — Non-Locking	S	S
13AF00	Drag Link & Tie Rods — Greaseable	S	S
STD.	Hubs, Front & Rear — Ductile Iron	S	S
STD.	Magnetic Traps, Rear Axle — Drain & Fill Plugs	S	S
13BT00	Steering Power — Integral, TRW TAS-65 Gear	S	S
13H700	Wheel Seals — Front, Grease Type	S	S
STD.	Wheel Seals — Rear, Wet Type, C.R. "Scotseal", Unitized	S	S
	16 — BRAKES, SERVICE		
16AW00	Brakes, Air — Cam Type Front — 15"x4" Meritor Q Plus	S	S
16A000	Rear — 16-1/2"x7" Meritor Q Plus	S	S
	19 — BRAKE EQUIPMENT		
19MF00	ABS, Antilock Brake System — Full Vehicle, Four Channel w/ Wheel-End Sensing	S	S
	Air Compressor 13.2 CFM, Water Cooled, Bendix Tu-Flo 550	S	S
19FC00	Air Dryer-None	S	S
STD.	Air Reservoir, Steel	S	S
19NL00	Drain Cocks, Manual	S	S
STD.	Parking Brake, Spring-Set Rear Axle — Maxi II Rear, Single Axle (Two-Wheel)	S	
19NY00	Rear, Tandem Axle (Four-Wheel) (Standard w/ truck)		S
19N000	Slack Adjusters, Front & Rear — 5.5" Automatic, Gunite	S	S
STD.			
	22 — CAB, STEEL		
22BJ00	Value Interior Trim Medium Graphite Interior Trim Color	S	S
	23 — CAB EQUIPMENT/ EXTERIOR		
STD.	Assist Handles, R.H. & L.H.	S	S
STD.	Cab Mounts, Front — Trunnion	S	S
STD.	Cab Suspension, Rear, Conventional Rubber Glass	S	S
STD.	Door Vent Windows, Solar Tinted L.H. & R.H. (Two way w/locking latch).....	S	S
STD.	Rear Window, None	S	S
STD.	Windshield & Side Glass — Solar Tinted	S	S
23A800	Grille, Hood Mounted, Bright	S	S
23AB00	Hood, Forward Tilting Front End (Without Transverse Engine Service Access Door).....	S	S
23KH00	Horn, Single — Electric	S	S
23YX00	Mirrors, Dual, Western, Painted Med. Titanium	S	S
233B00	Mirror, Auxiliary, 5.5" Dia., Bottom Mounted, Painted Med. Titanium, R.H. only	S	S
23RA00	Mirror Arms, 96" (Standard w/ truck)	S	S
STD.	Windshield Wipers, Interval, Electric (w/lift-off "Wet Arm" windshield wiper arms and integral nozzles, electric washer pump & 8-liter reservoir)	S	S

NOTE: All capacity ratings shown represent on-highway application.

L / LT8513 — 113" BBC

MID-RANGE DIESEL — STANDARD EQUIPMENT

		4x2	6x4
		L8513	LT8513
SALES CODE	24 — CAB EQUIPMENT/ INTERIOR		
24AL00	Cigar Lighter (I/P Mounted).....	S	S
STD.	Door Locks, Manual L.H. & R.H.	S	S
STD.	Floor Mat, Full Vinyl Med. Dark Graphite	S	S
STD.	Heater, Defroster/ Demister and Fresh Air Ventilation	S	S
STD.	Lamp, Dome, Center Mounted	S	S
STD.	Radio, None	S	S
STD.	Steering Column, Stationary	S	S
24B500	Steering Wheel 18" Dia.	S	S
STD.	Sun Visors, Single, Vinyl — L.H. & R.H. (Incl. ticket strap).....	S	S
STD.	Window Control — Manual (Side Windows)	S	S
	25 — SEATING		
	(Seats are color coordinated to cab trim level. Passenger seat matches driver seat in appearance and material; All seats include seat belts)		
25AACW	National, Mid-Back		
25GH00	Driver, Fixed Base, Less Isolator (Incl. cup holder).....	S	S
	Passenger, None	S	S
	OTHER SEATING EQUIPMENT		
25AAD3	Belts, Seat — Lap and Shoulder, 3-pt. mounting w/ Adjustable D-Ring		
	Driver Only	S	S
	26 — INSTRUMENTS/ GAUGES/ SWITCHES/ WARNING DEVICES		
26MR00	Air Cleaner Restriction Indicator, Air Cleaner Mounted	S	S
26NN00	Gauges, Electronic Cluster (Incl. speedometer, tachometer, fuel level, coolant temp., voltmeter, oil press. & dual air brake press.).....	S	S
26M700	Gauge — Control Panel, Flat Gauge Insert — R.H.	S	S
STD.	Parking Brake Control, I/ P Mounted	S	S
26C700	Turn Signal Switch, Self-Cancelling	S	S
	Warning Lights		
STD.	ABS Anti-Lock System	S	S
STD.	High Beam Indicator	S	S
STD.	Turn Signal Indicators	S	S
STD.	Warning Light & Buzzer — Air Brakes	S	S
	27 — ELECTRICAL		
STD.	Canadian Daytime Running Lights (Standard in Canada only)	S	S
	Circuits, Customer Access		
STD.	I/ P Fuse Panel Pkg.	S	S
STD.	Access Circuits Connector (Eng. comp., rear of cab & rear of chassis w/truck applications; Eng. comp. & rear of cab w/tractor applications)	S	S
STD.	Circuit Protectors, Fuses	S	S
STD.	Flasher, Emergency	S	S
STD.	Lamps, Turn Signal & Side Marker Combination, Rear/ Side Facing, Hood Mounted	S	S
	Lights		
STD.	Cab Marker, 5 Lights	S	S
STD.	Head, Two Rectangular Halogen, Dual Beam (Incl. stalk mounted switch for dimmer and flash to pass).....	S	S
STD.	Hood Mount Turn Signals, 2 Lights	S	S
STD.	Tail, Two w/ Integral Stop, Turn, Backup, and License Plate (Mounted inside frame rails).....	S	S
STD.	Taillight Mounting, Inside Frame Rails — 21.56" Spacing	S	S
	28 — ALTERNATORS		
28BK00	95 amp., 1425 watt Motorcraft, Internally Regulated	S	S
	29 — BATTERIES/ BOXES/ CABLES		
29HM00	Battery, Maintenance Free Sterling, 12 Volt		
	Two, 600 CCA (65 amp.-hr.)	S	S
29KE00	Battery Box, Frame Mounted		
	Under Cab, Standard Weight, L.H. — Forward Mounted (Incl. frame mtd. cab access steps)	S	S
	30 — ENGINES		
	(Engine listings show Advertised Horsepower/Advertised Torque/Governed RPM; See Safety-Noise-Emission Section of Component Info. Data Book)		
300P00	CUMMINS ISC (ELECTRONIC) DIESEL		
	ISC-215 HP/ 620 lb.-ft./ 2400 RPM	S	S

L / LT8513 — 113" BBC

MID-RANGE DIESEL — STANDARD EQUIPMENT

		4x2	6x4
		L8513	LT8513
SALES CODE	32 — EXHAUSTS		
32FD00	Exhaust System Single Horizontal Muffler and Pipe, R.H.	S	S
	36 — CLUTCHES		
36FA00	Clutch, Eaton-Spicer		
STD.	14", 1-plate ceramic, Manual Adjustment	S	S
	Clutch Housing, Aluminum (<i>For on-hwy. only</i>)	S	S
	37 — ENGINE EQUIPMENT		
STD.	Air Cleaner, Donaldson Single Stage	S	S
STD.	Air Intake, Source-Engine Outside Air	S	S
373000	Engine Mounts, Compression Type	S	S
373200	Engine Shutoff — Key (<i>Solenoid</i>).....	S	S
373400	Fan Clutch, Eaton Viscous	S	S
STD.	Filter, Coolant Conditioner — Fleetguard Spin-On type	S	S
STD.	Filter, Fuel/ Water Separator — Fleetguard, Engine Mtd. Unheated	S	S
STD.	Filter, Oil Single 2.6 qt. Disposable — Fleetguard LF3000 Full-Flow & By-Pass Combo, Spin-On type	S	S
STD.	Fuel Pump, Electronically Controlled	S	S
STD.	Governor, Electronic	S	S
STD.	Hose, Radiator, EPDM Rubber (<i>Incl. torque controlled clamps</i>)	S	S
STD.	Oil Cooler, Integral	S	S
STD.	Oil Fill System, Standard Oil Fill & Check	S	S
STD.	Radiator, Nominal Cooling — 830 sq. in. cooling module w/ 2.0" alum. core	S	S
STD.	Starter, Electric, Delco 12 Volt	S	S
STD.	Starter Interlock (<i>Clutch Pedal Actuated</i>).....	S	S
	40 — FRAME — SINGLE REAR AXLES		
40E900	Single Channel 13.3 SM, 120,000 PSI	S	
	40 — FRAME — TANDEM REAR AXLES		
40E900	Single Channel 13.3 SM, 120,000 PSI		S
	FRAME MODIFICATIONS		
40EL00	Bolted Frame w/ Huck Fasteners at rear cab supt., intermediate and rear suspension crossmembers	S	S
40EN00	Frame End, Rear, Square Cut	S	S
	43 — FUEL TANKS		
43L700	Rectangular Tanks, Steel — Shallow 55 gal. Single R.H.	S	S
	44 — FUEL TANK EQUIPMENT		
STD.	Forward Mounted Fuel Tanks, R.H.	S	S
STD.	Fuel Tank Mounting Supports Standard-Weight Tank Supports	S	S
STD.	Steps Cab Length, Fuel Tank Mounted	S	S
	46 — SUSPENSION, FRONT, MULTI-LEAF, 54" SPREAD		
46CT00	10,000 lb. Cap.	S	S

NOTE: All capacity ratings shown represent on-highway application.

L / LT8513 — 113" BBC

MID-RANGE DIESEL — STANDARD EQUIPMENT

		4x2	6x4
		L8513	LT8513
SALES CODE	47 — SUSPENSION, REAR		
47J700	SUSPENSION, REAR, MULTI-LEAF 21,000 lb. Capacity for 21,000 lb. rear axle	S	
47KH00	SUSPENSION, REAR — AUXILIARY (<i>Recommended for use w/high center-of-gravity loads and/or off-hwy. operations</i>) Single Leaf	S	
47AW00	SUSPENSION, REAR, TANDEM — FOR 34,000 LB. AXLES 34,000 lb. Cap. Hendrickson Steel Walking Beam — 52" Axle Spacing U2-340		S
	50/ 51/ 52/ 53/ 54 — TIRES-WHEELS AVAILABILITY		
50ACLO	Tires, Front Two, 275/ 80R 22.5G (14PR) Michelin XZE	S	S
51ACLO	Tires, Rear Four, 275/ 80R 22.5G (14PR) Michelin XZE	S	
51ACLO	Eight, 275/ 80R 22.5G (14PR) Michelin XZE		S
52G000	Wheels, Front Two, 22.5 X 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	S	S
53G000	Wheels, Rear Four, 22.5 X 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	S	
53G000	Eight, 22.5 X 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW		S
	55 — WHEEL & TIRE EQUIPMENT		
STD.	Wheels, I.S.O. Steel Disc (<i>Painted "Vendor White" — Not Pure White or Diamond White</i>).....	S	S
	56 — TRANSMISSIONS		
56SE00	5-Speed Direct Eaton FS-6305A	S	S
	59 — CHASSIS EQUIPMENT		
59F600	Bumper, Front Steel, Full Width, Swept-Back, Painted Med. Titanium	S	S

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

113" BBC BASE VEHICLE PRICE ORDER CODES AND ADDITIONAL CHARGES FOR VARIOUS WHEELBASES

4x2

Order Code	Wheelbase	Suggested List Price (U.S. Dollars)
W14800-AB	148"	STD.
W16000-AA	160"	321.00
W17200-AA	172"	321.00
W18400-AA	184"	321.00
W19000-AJ	190"	431.00
W19600-AJ	196"	524.00
W20800-AA	208"	524.00
W22000-AA	220"	524.00
W23200-AA	232"	524.00
W24400-AA	244"	821.00

6x4

Order Code	Wheelbase	Suggested List Price (U.S. Dollars)
W14800-AC	148" (Req. optional exhaust)	NC
W16000-AB	160"	STD.
W17200-AB	172"	331.00
W18400-AB	184"	331.00
W19000-AK	190"	331.00
W19600-AK	196"	437.00
W20800-AB	208"	437.00
W22000-AB	220"	437.00
W23200-AB	232"	437.00
W24400-AB	244"	736.00

**INTENTIONALLY
BLANK
THIS MAILING**

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
CONFIGURATION SALES CODE				L8513	LT8513
STANDARD WHEELBASE				148"	160"
CONFIGURATION PRICE (U.S. Dollars)				49255.00	57700.00
REFER TO ORDERING INFORMATION — RPO OR TFT FOR MANDATORY VEHICLE APPLICATION CODES AND THEIR DEFINITIONS.					
SALES CODE	10 — AXLE, FRONT				
10AG00	10,000 lb. (Incl. 10,000 lb. cap. 54" spread, multi-leaf susp., Code 46CT00, 15" x 4" Meritor Q Plus brakes & TAS-65 power steering) (Standard)	—	—	S	S
10AE00-BN	12,000 lb. (Incl. 12,000 lb. cap. 54" spread, multi-leaf susp., Code 46CV00, 15" x 4" Meritor Q Plus brakes & TAS-65 power steering)	29	301.00	O	O
10AM00-AC	13,000 lb. (Incl. 13,200 lb. cap. 54" spread, multi-leaf susp., Code 46CW00, 15" x 4" Meritor Q Plus brakes & TAS-65 power steering)	44	668.00	O	O
10A200-AH	14,600 lb. (Incl. 14,600 lb. cap. 54" spread, multi-leaf susp., Code 46CX00 & 16-1/2" x 6" Meritor Q Plus brakes Code 16A200) (Incl. TAS-85 power steering w/54" multi-leaf or taper-leaf springs)	296	1803.00	O	O
10AF00-AR	16,000 lb. (Incl. 16,000 lb. cap. 54" spread, multi-leaf susp., Code 46CY00, 16-1/2" x 6" Meritor Q Plus brakes Code 16A200 & TAS-85 power steering) (Avail. w/truck or on-off hwy. tractor only)	332	2115.00		O
10AD00-AJ	18,000 lb. (Incl. 18,000 lb. cap. 54" spread, multi-leaf susp., Code 46C000, 16-1/2" x 6" Meritor Q Plus brakes Code 16A200 and TAS-65 L.H. & RCS-55 R.H. dual power steering gears) (Avail. w/truck or on-off hwy. tractor only) (Not available in combination w/19,000 lb. or 21,000 lb. single Rear Axles)	403	3199.00		O
10AH00-AC	20,000 lb. (Incl. 20,000 lb. cap. 54" spread, multi-leaf susp., Code 46C100, 16-1/2" x 6" Meritor Q Plus brakes Code 16A200 and TAS-65 L.H. & RCS-55 R.H. dual power steering gears) (Avail. w/truck or on-off hwy. tractor only)	369	3883.00		O
11 — AXLE, REAR					
19,000 lb. Single-Speed Meritor RS-19-144		-35	CR 231.00	O	
2.79 11AJN0-AA 4.63 11AJ20-AA 2.93 11AJP0-AA 4.88 11AJ30-AA 3.07 11AJQ0-AA 5.13 11AJ40-AA 3.21 11AJR0-AA 5.29 11AJ50-AA 3.42 11ajs0-AA 5.57 11AJ60-AA 3.58 11AJT0-AA 5.86 11AJ70-AA 3.73 11AJU0-AA 6.14 11AJ80-AA 3.90 11AJV0-AA 6.43 11AJ90-AA 4.11 11AJW0-AA 6.83 11AKA0-AA 4.33 11AJY0-AA 7.17 11AKB0-AA					
19,000 lb. Two-Speed Meritor RS-19-224		-64	459.00	O	
3.91/ 5.45 11APF0-AA 5.86/ 8.17 11APM0-AA 4.10/ 5.72 11APG0-AA 6.14/ 8.57 11APN0-AA 4.30/ 6.00 11APH0-AA 6.50/ 9.07 11APP0-AA 4.56/ 6.36 11API0-AA 6.83/ 9.53 11APQ0-AA 4.88/ 6.80 11APK0-AA 7.17/ 10.0 11APR0-AA 5.38/ 7.50 11APL0-AA					
21,000 lb. Single-Speed Meritor RS-21-145 (Standard)		—	—	S	
2.79 11AHA0-AA 4.63 119G00-AT 2.93 11ABN0-AA 4.88 11BP00-AV 3.07 115D00-AA 5.13 11HW00-AH 3.21 11AAB8-AA 5.29 11BT00-AV 3.42 113G00-AG 5.57 11HX00-AP 3.58 11WP00-AG 5.86 11BV00-AP 3.73 11HV00-AL 6.14 112600-AJ 3.90 11AHB0-AA 6.43 11BW00-AY 4.11 11AHC0-AA 6.83 11BX00-AR 4.33 119F00-AP 7.17 11BY00-AN					

NOTE: All capacity ratings shown represent on-highway application.

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION				WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	11 — AXLE, REAR (Continued)						
	21,000 lb. Two-Speed Meritor RS-21-230 3.91/ 5.45 11B000-AM 5.38/ 7.50 11B500-AV 4.10/ 5.72 11B100-AN 5.86/ 8.17 11B900-AF 4.30/ 6.00 11B200-AT 6.50/ 9.07 11B600-AE 4.56/ 6.36 11B300-AV 6.83/ 9.53 11B700-AE 4.88/ 6.80 11B400-AV 7.17/ 10.0 11B800-AE			74	677.00	0	
	23,000 lb. Single-Speed Meritor RS-23-160 2.80 11ABG0-AA 4.30 11CF00-AX 2.93 11AAF7-AA 4.56 11CG00-BK 3.07 11V500-AL 4.89 11CH00-AY 3.21 11V600-AL 5.38 11CJ00-AP 3.42 11CA00-AN 5.63 11CK00-AP 3.58 11CB00-AN 6.14 11CL00-AK 3.73 11CC00-AW 6.43 117J00-AC 3.91 11CD00-AX 6.83 11CM00-AL 4.10 11CE00-AX 7.17 11CN00-A6			164	684.00	0	
	23,000 lb. Single-Speed Meritor RS-23-161 (Req. Neway AD-123 air susp. Code 47KG00) 2.80 11ACC0-AA 4.30 114900-AA 2.93 11ACD0-AA 4.56 11AAF3-AA 3.07 11ACE0-AA 4.89 11ACL0-AA 3.21 11ACF0-AA 5.38 11ACM0-AA 3.42 11ACG0-AA 5.63 11ACN0-AA 3.58 114300-AA 6.14 11ACP0-AA 3.73 11ACH0-AA 6.43 11ACQ0-AA 3.91 11ACJ0-AA 6.83 11AAFB-AA 4.10 11ACK0-AA 7.17 11ACR0-AA			188	725.00	0	
	23,000 lb. Single-Speed Meritor RS-23-186 2.93 11ALF0-AA 4.56 11ALP0-AA 3.08 11ALG0-AA 4.89 11ALQ0-AA 3.21 11AFR0-AA 5.13 11ALR0-AA 3.42 11ALH0-AA 5.38 11ALS0-AA 3.58 11ALJ0-AA 5.63 11ALT0-AA 3.73 11ALK0-AA 5.86 11ALU0-AA 3.91 11ALL0-AA 6.14 11ALV0-AA 4.10 11ALM0-AA 6.83 11ALW0-AA 4.30 11ALN0-AA 7.17 11ALX0-AA			220	1311.00	0	
	23,000 lb. Two-Speed Meritor RS-23-240 4.10/ 5.59 11DE00-AL 5.57/ 7.60 11DJ00-AN 4.30/ 5.86 11DF00-AL 6.14/ 8.38 11DK00-AD 4.56/ 6.21 117L00-AM 6.50/ 8.86 11DL00-AD 4.88/ 6.65 11DG00-AL 7.17/ 9.77 11DM00-AD 5.38/ 7.33 11DH00-AN			148	1395.00	0	
	34,000 lb. Single-Speed Meritor RT-34-144 (Standard) 2.79 11AKC0-AA 4.33 11AKN0-AA 2.93 11AKD0-AA 4.63 11AKQ0-AA 3.07 11AKE0-AA 4.88 11AKR0-AA 3.21 11AKF0-AA 5.29 11AKS0-AA 3.42 11AKG0-AA 5.86 11AKT0-AA 3.58 11AKH0-AA 6.14 11AKU0-AA 3.73 11AKJ0-AA 6.43 11AKV0-AA 3.90 11AKK0-AA 6.83 11AKW0-AA 4.11 11AKL0-AA 7.17 11AKX0-AA			—	—		S

NOTE: All capacity ratings shown represent on-highway application.

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	11 — AXLE, REAR (Continued)				
	40,000 lb. Single-Speed Meritor RT-40-145 2.79 11AHG0-AA 4.33 118100-AP 2.93 119800-AA 4.63 118200-AP 3.07 11G400-AM 4.88 11FG00-AT 3.21 11G500-AM 5.29 11FH00-AG 3.42 11E900-AN 5.86 11FJ00-AG 3.58 11FA00-AN 6.14 11FK00-AA 3.73 11FB00-BH 6.43 11FL00-AA 3.90 11AHH0-AA 6.83 11G700-AA 4.11 11AHJ0-AA 7.17 11FM00-AA	1	543.00		0
	40,000 lb. Single-Speed Meritor RT-40-145P 2.79 11AHK0-AA 4.33 118300-AP 2.93 119M00-AA 4.63 118400-AP 3.07 11MX00-AL 4.88 11FY00-AR 3.21 11P700-AL 5.29 11F000-AG 3.42 11FN00-AM 5.86 11F100-AG 3.58 11FP00-AM 6.14 11F200-AA 3.73 11FR00-AR 6.43 11F300-AA 3.90 11AHL0-AA 6.83 11WK00-AA 4.11 11AHM0-AA 7.17 11F400-AA	31	887.00		0
	46,000 lb. Single-Speed (Incl. 46,000 lb. RT2-460 susp., w/Bronze center bushings & 54" axle spacing Code 47BC00) (N.A. w/10.76 SM frame Code 40E7000 or 13.3 SM frame Code 40E900) Meritor RT-46-160 3.07 11YF00-AJ 4.56 11GG00-AL 3.21 11YG00-AJ 4.89 11GH00-AL 3.42 11GA00-AL 5.38 11GJ00-AD 3.58 11GB00-AL 5.63 11GK00-AD 3.73 11GC00-AL 6.14 11KJ00-AA 3.91 11GD00-AL 6.43 11PC00-AA 4.10 11GE00-AL 6.83 11PG00-AA 4.30 11GF00-AL 7.17 11PH00-AA	830	4311.00		0
	46,000 lb. Single-Speed (Incl. 46,000 lb. RT2-460 susp., w/Bronze center bushings & 54" axle spacing Code 47BC00) (N.A. w/10.76 SM frame Code 40E700 or 13.3 SM frame Code 40E900) Meritor RT-46-160P (Req. driver controlled main Rear Axle locking differential Code 13AW00) 3.07 11YH00-AJ 4.56 11GX00-AL 3.21 11YJ00-AJ 4.89 11GY00-AL 3.42 11GL00-AL 5.38 11G000-AD 3.58 11GN00-AL 5.63 11G100-AD 3.73 11GR00-AL 6.14 11N000-AA 3.91 11GT00-AL 6.43 11AADT-AA 4.10 11GV00-AL 6.83 11TA00-AA 4.30 11GW00-AL 7.17 11XA00-AA	860	4603.00		0
	13 — AXLE EQUIPMENT				
STD.	Brake Drums, Front & Rear — Full Cast (Standard)	—	—	S	S
	Brake Drums, Centrifuse (N.A. w/cast spoke wheels)				
13AP00-BD	— Front (Avail. w/10,000 lb. Front Axle Code 10AG00 or 12,000 lb. Front Axle Code 10AE00; Avail. w/on-hwy. tractor only)	-24	345.00	O	O
13AR00-BH	— Rear, Single Axle (Avail. w/21- or 23,000 lb. Rear Axle only; N.A. w/severe duty)	-36	345.00	O	
13AR00-BJ	— Rear, Tandem Axle (Avail. w/40- or 46,000 lb. Rear Axle only; N.A. w/severe duty)	-72	688.00		O
	Bushings, Kingpin, Front Axle				
STD.	— Bronze (Standard)	—	—	S	S
13A300-BJ	— Garlock Low Friction (Avail. w/10,000 lb. Front Axle Code 10AG00, 12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00 only)	0	403.00	O	O
STD.	Differential, Inter-Axle — Full Locking, Driver Controlled (Standard)	—	—		S

NOTE: All capacity ratings shown represent on-highway application.

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	13 — AXLE EQUIPMENT (Continued)				
13A900	Differential, Main — Non-Locking (Standard)	—	—	S	S
13AW00-BH	Differential, Main, Lockout — Full Locking, Driver Controlled				
13AW00-BJ	— Rear, Single Axle (N.A. w/RS-19-144, RS-19-224, RS-21-230 & RS-23-240)	15	427.00	O	
	— Rear, Tandem Axle (Both rear axles) (N.A. w/RT-34-144) (N.A. when air susp. dump valve Code 48AC00 and inside/outside air Code 373T00 is used in comb. w/air slide fifth wheel)	15	852.00		O
13AF00	Drag Link & Tie Rod — Greaseable (Standard)	—	—	S	S
	Driveline — Half Round Yoke (See Component Book, U-Joint Chart in Axle Equipment & Driveline Section for size and availability)				
STD.	— Standard U-Joints (Standard)	—	—	S	S
13AG00-BN	— Heavy Duty U-Joints	26	71.00	O	
13AG00-BV	— Heavy Duty U-Joints	14	100.00		O
	Hubs, Aluminum				
13AT00-AV	— Front (Avail. w/10,000 lb. Front Axle Code 10AG00 or 12,000 lb. Front Axle Code 10AE00; For on-hwy. service only) (Req. Garlock bushings Code 13A300 when used w/std. ABS brakes)	-17	327.00	O	O
	— Rear (N.A. for severe duty)				
13AV00-B9	— Single Axle (Avail. w/21- or 23,000 lb. Rear Axle)	-40	335.00	O	
13AV00-CA	— Tandem Axle (Avail. w/40- or 46,000 lb. Rear Axle)	-80	727.00		O
STD.	Hubs, Front & Rear — Ductile Iron (Standard)	—	—	S	S
	Hubs, High Tensile Ferrous (For on-hwy. service only)				
13HW00-AA	— Front (Avail. w/10,000 lb. Front Axle Code 10AG00 or 12,000 lb. Front Axle Code 10AE00)	-17	287.00	O	O
	— Rear				
13HX00-AA	— Single Axle (Avail. w/21- or 23,000 lb. Rear Axle only)	-30	287.00	O	
13HX00-AB	— Tandem Axle (Avail. w/40,000 lb. Rear Axle only)	-60	573.00		O
STD.	Magnetic Traps, Rear Axle — Drain & Fill Plugs (Standard)	—	—	S	S
13AB00-BN	Shock Absorbers, Front — Double Acting Telescopic (Incl. w/taper-leaf springs)	25	139.00	O	O
13HL00-AA	Stabilizer Bar, Front (Avail. w/taper-leaf front springs only) (N.A. w/16-, 18- or 20,000 lb. Front Axle) (N.A. w/severe duty)	41	352.00	O	O
13BT00	Steering, Power — Integral, TRW TAS-65 Gear (Standard)	—	—	S	S
	Synthetic Lube — Mobil 75W-90				
	Single Rear Axle				
13F300-AA	19,000 lb. thru 21,000 lb. cap.	0	145.00	O	
13F300-AJ	23,000 lb. cap.	0	145.00	O	
	Tandem Rear Axle				
13F300-AB	34,000 lb. thru 40,000 lb. cap.	0	232.00		O
13F300-AN	46,000 lb. cap.	0	308.00		O
13F200-AA	Wheel Lube, Front Axle (Req. wet type wheel seal Code 13H600)	0	32.00	O	O
	Wheel Seals — Front (See Component Information Data Book for details)				
13H700	Grease Type (Standard)	—	—	S	S
13H600-AB	Wet Type, Unitized	2	35.00	O	O
	Wheel Seals — Rear (See Component Information Data Book for details)				
STD.	Wet Type, C.R. "Scotseal," Unitized (Standard)	—	—	S	S
	Wet Type, Stemco "Grit-Guard," Two-Piece				
13A000-BT	— Single Axle	1	28.00	O	
13A000-BV	— Tandem Axle	3	53.00		O
	16 — BRAKES, SERVICE				
	Brakes, Air — Cam Type				
16AW00	— Front — 15"x 4" Meritor Q Plus (Standard)	—	—	S	S
16A100-BB	— Front — 16-1/2"x 5" Meritor Q Plus (Avail. w/12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00 only; N.A. w/alum. hubs, high tensile hubs or centrifuse brake drums)	30	149.00	O	O
16A000	— Rear — 16-1/2"x 7" Meritor Q Plus (Standard)	—	—	S	S

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	19 — BRAKE EQUIPMENT				
19MF00	ABS, Antilock Brake System — Full Vehicle, Four Channel — Incl. wheel-end sensing (<i>Standard</i>)	—	—	S	S
19FC00	Air Compressor 13.2 CFM, Water Cooled, Bendix Tu-Flo 550 (<i>Standard</i>)	—	—	S	S
STD.	Air Dryer, None (<i>Standard</i>)	—	—	S	S
19A700-BN	Air Dryer, Heated — Bendix AD-9 (<i>Mounted on L.H. frame rail, aft of front wheelwell</i>)	27	433.00	O	O
19NF00-AA	Air Dryer, Heated — Bendix, AD-IP (<i>System Guard, Integral Purge</i>) (<i>Mounted on L.H. frame rail, aft of front wheelwell</i>)	34	433.00	O	O
	Air Reservoir Tanks				
	Single Axle				
19NG00-AA	Lightweight, Aluminum (<i>Painted Black</i>)	-35	435.00	O	
19NL00	Steel (<i>Standard</i>)	—	—	S	
	Tandem Axle				
19NG00-AJ	Lightweight, Aluminum (<i>Painted Black</i>)	-35	435.00		O
19NL00	Steel (<i>Standard</i>)	—	—		S
19QA00-AA	Brake Control Valve, Rear Brakes, Hand Operated (<i>For truck use only</i>) (<i>N.A. w/two pass. seat Code 25AADF</i>)	2	147.00	O	O
19BV00-AA	Brake Control Valve, Trailer, Hand Operated — DELETE (<i>For trailer towing pkg. Code 19NH00 or tractor pkg. only</i>)	-2	CR 17.00	O	O
	Brake Dust Shields				
	Single Axle				
19JE00-BA	— Use w/ on-hwy. applications	12	32.00	O	
19JE00-BK	— Required w/ on-off hwy. or severe duty applications	12	NC	O	
	Tandem Rear Axle				
19JE00-BB	— Use w/ on-hwy. applications	19	64.00		O
19JE00-BL	— Required w/ on-off hwy. or severe duty applications	19	NC		O
STD.	Drain Cocks, Manual (<i>Standard</i>)	—	—	S	S
19NM00-AA	Drain Cocks, Manual w/ Lanyard Cable (<i>In lieu of std. manual drain cocks.</i>)	1	28.00	O	O
19AV00-AD	Moisture Ejectors, Automatic, Heated — Bendix, DV-2 (<i>In lieu of manual drain cocks</i>)	1	99.00	O	O
19AL00-BP	Moisture Ejectors, Automatic, Non-Heated — Bendix, DV-2 (<i>In lieu of manual drain cocks</i>)	1	60.00	O	O
	Parking Brake, Spring-Set Rear Axle — Maxi II				
19NY00	— Rear, Single Axle — Two-Wheel (<i>Standard</i>)	—	—	S	
19N000	— Rear, Tandem Axle — Four-Wheel (<i>Standard w/truck</i>)	—	—		S
19N000-AA	— Rear, Tandem Axle — Four-Wheel (<i>Avail. w/tractor only</i>)	0	NC		O
	Parking Brake, Spring-Set Rear Axle — MGM (<i>In lieu of Maxi II</i>)				
19N100-AA	— Rear, Single Axle — Two-Wheel	-20	NC	O	
19N100-AF	— Rear, Tandem Axle — Two-Wheel (<i>Avail. w/tractor only</i>)	-20	NC		O
19N200-AA	— Rear, Tandem Axle — Four-Wheel (<i>Avail. w/truck only</i>)	-40	NC		O
19N200-AF	— Rear, Tandem Axle — Four-Wheel (<i>Avail. w/tractor only</i>)	-40	NC		O
STD.	Slack Adjusters, Front & Rear — 5.5" Automatic, Gunite (<i>Standard</i>)	—	—	S	S
19NH00-AA	Trailer Towing Pkg. — Truck w/ Trailer (<i>Air & elec. lines to end of frame</i>) (<i>Incl. tractor protection control valve & hand-operated trailer brake control valve</i>) (<i>Req. min. 172" wb</i>) (<i>Avail. w/outside frame rail taillight mounting Code 275600 and truck w/trailer Code AAAD00 only</i>) (<i>N.A. w/any tractor pkg.</i>) (<i>N.A. w/std. turn signal switch Code 26C700</i>)	13	539.00	O	O

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	20 — TRACTOR EQUIPMENT (See Component Information Data Book for complete content)				
	TRACTOR PACKAGE (Incl. tractor protection control valve, hand-operated trailer brake control valve, rear bobtail proportioning valve [in lieu of std. R-12 relay valve], tapered frame ends exc. w/reinforced frames, std. signal-stat non-cancelling turn signal switch; fixed focus trailer hook-up light incl. I/P switch w/"On" indicator, 102" mirror arms Code 23BP00, solar tint rear cab window Code 23YL00 & mud flap brackets)				
	SINGLE AXLE (Incl. 21,000 lb. multi-leaf rear susp. Code 47J700) (Deletes std. aux. susp. Code 47KH00)				
	— ON-HIGHWAY (Requires focal engine mounts Code 373100 w/Cum. ISC eng. w/10,000 lb. Front Axle Code 10AG00, 12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00) (Req. std. compression engine mounts Code 373000 w/Cat. 3126 eng.)				
20AB00-B6	— w/ 10' Air & Electrical Tractor/Trailer Lines (N.A. w/unipac Code 20GE00)	-26	644.00	0	
20AC00-BW	— w/ 12' Air & Electrical Tractor/Trailer Lines (N.A. w/unipac Code 20GE00)	-26	656.00	0	
20AE00-CC	— w/ 12' Coiled Air & Electrical Tractor/Trailer Lines (N.A. w/unipac Code 20GE00)	-25	668.00	0	
20GE00-A2	— Unipac Tractor Package (Incl. w/12' coiled air & electric lines; Also incl. single fixed focus trailer hook-up light in lieu of the hook-up light included w/tractor pkg.)	-24	723.00	0	
	— ON-OFF HIGHWAY (Incl. std. compression engine mounts)				
20AB00-B7	— w/ 10' Air & Electrical Tractor/Trailer Lines (N.A. w/unipac Code 20GE00)	-26	644.00	0	
20AC00-BX	— w/ 12' Air & Electrical Tractor/Trailer Lines (N.A. w/unipac Code 20GE00)	-26	656.00	0	
20AE00-CD	— w/ 12' Coiled Air & Electrical Tractor/Trailer Lines (N.A. w/unipac Code 20GE00)	-25	668.00	0	
20GE00-A3	— Unipac Tractor Package (Incl. w/12' coiled air & electric lines; Also incl. single fixed focus trailer hook-up light in lieu of the hook-up light included w/tractor pkg.)	-24	723.00	0	
	TANDEM AXLE (N.A. w/front bumper extension & 244" wb) (N.A. w/extended frame Code 40GB00 & 232" or 244" wb)				
	— ON-HIGHWAY (Requires focal eng. mounts Code 373100 w/Cum. ISC eng. w/10,000 lb. Front Axle Code 10AG00, 12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00) (Req. std. compression engine mounts Code 373000 w/Cat. 3126 eng.) (Incl. two-wheel parking brakes Maxi II)				
20AB00-B8	— w/ 10' Air & Electrical Tractor/Trailer Lines (N.A. w/unipac Code 20GE00)	N/A	889.00		0
20AC00-BY	— w/ 12' Air & Electrical Tractor/Trailer Lines (N.A. w/unipac Code 20GE00)	35	903.00		0
20AE00-CE	— w/ 12' Coiled Air & Electrical Tractor/Trailer Lines (N.A. w/unipac Code 20GE00)	36	915.00		0
20GE00-A4	— Unipac Tractor Package (Incl. w/12' coiled air & electric lines; Also incl. single fixed focus trailer hook-up light in lieu of the hook-up light included w/tractor pkg.)	37	969.00		0
	— ON-OFF HIGHWAY (Incl. std. compression eng. mounts Code 373000 & two-wheel parking brake Maxi II)				
20AB00-B9	— w/ 10' Air & Electrical Tractor/Trailer Lines (N.A. w/unipac Code 20GE00)	35	716.00		0
20AC00-B0	— w/ 12' Air & Electrical Tractor/Trailer Lines (N.A. w/unipac Code 20GE00)	35	728.00		0
20AE00-CF	— w/ 12' Coiled Air & Electrical Tractor/Trailer Lines (N.A. w/unipac Code 20GE00)	36	740.00		0
20GE00-A5	— Unipac Tractor Package (Incl. w/12' coiled air & electric lines; Also incl. single fixed focus trailer hook-up light in lieu of the hook-up light included w/tractor pkg.)	37	795.00		0

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	22 — CAB				
22BD00-AA	CAB, ALUMINUM (Avail. w/on-hwy. tractor only; Req. cab rear air susp. Code 23A500) (N.A. w/walking beam tandem rear suspensions) (See Component Information Data Book for complete details) — Value Interior Trim (Incl. vinyl seat trim Code 25AAD8, hardboard headliner & lower back panel, L.H. cowl side panel w/integral footrest, black vinyl floor mat, steering column shroud, 18" steering wheel, padded vinyl sun visors w/ticket strap, scuff plates, L.H./R.H. metal assist handles, coat hook, center mounted dome lamp and L.H./R.H. door courtesy lamps & storage pockets) — Medium Graphite Interior Trim Color	-147	1823.00	0	0
22B800-AB	— Custom Interior Trim (Incl. knit vinyl seat trim Code 25AAD7, hardboard headliner & lower back panel, back panel storage net, L.H. cowl side panel w/integral footrest, black vinyl floormat, vinyl trimmed doors w/map pockets, L.H./R.H. padded armrests, steering column shroud, 18" steering wheel, padded vinyl sun visors w/ticket strap, scuff plates, L.H./R.H. molded assist handles, two coat hooks, center mounted dome lamp, L.H./R.H. door courtesy lamps & storage pockets) — Medium Graphite Interior Trim Color	-142	2075.00	0	0
22BE00-AA	— Prestige Interior Trim (Incl. polyknit vinyl (cloth) seat trim Code 25AAD9, cloth trimmed full headliner & carpet trimmed back panel w/storage net, L.H./R.H. cowl side panels w/integral footrest, black vinyl floor mat, vinyl trimmed "B" pillars, Polyknit trimmed doors w/map pockets, "A" pillar garnish molding, L.H./R.H. padded armrests, steering column shroud, 18" steering wheel, padded vinyl sun visors w/storage pouch, scuff plates, L.H./R.H. molded assist handles, two coat hooks, center mounted dome lamp and L.H./R.H. door courtesy lamps & storage pockets) — Medium Graphite Interior Trim Color	-137	2243.00	0	0
22B600-AC	— Medium Mocha Interior Trim Color	-137	2243.00	0	0
22B700-AC	— Cordovan Interior Trim Color	-137	2243.00	0	0
22BJ00	CAB, STEEL (See Component Information Data Book for complete details) — Value Interior Trim (Incl. vinyl seat trim Code 25AAD8, hardboard headliner & lower back panel, L.H. cowl side panel w/integral footrest, black vinyl floor mat, steering column shroud, 18" steering wheel, padded vinyl sun visors w/ticket strap, scuff plates, L.H./R.H. metal assist handles, coat hook, center mounted dome lamp and L.H./R.H. door courtesy lamps & storage pockets) — Medium Graphite Interior Trim Color (Standard)	—	—	S	S
22BW00-AA	— Custom Interior Trim (Incl. knit vinyl seat trim Code 25AAD7, hardboard headliner & lower back panel, back panel storage net, L.H. cowl side panel w/integral footrest, black vinyl floormat, vinyl trimmed doors w/map pockets, L.H./R.H. padded armrests, steering column shroud, 18" steering wheel, padded vinyl sun visors w/ticket strap, scuff plates, L.H./R.H. molded assist handles, two coat hooks, center mounted dome lamp and L.H./R.H. door courtesy lamps & storage pockets) — Medium Graphite Interior Trim Color	7	252.00	0	0
22B000-AA	— Prestige Interior Trim (Incl. polyknit vinyl (cloth) seat trim Code 25AAD9, cloth trimmed full headliner & carpet trimmed back panel w/storage net, L.H./R.H. cowl side panels w/integral footrest, black vinyl floor mat, vinyl trimmed "B" pillars, Polyknit trimmed doors w/map pockets, "A" pillar garnish molding, L.H./R.H. padded armrests, steering column shroud, 18" steering wheel, padded vinyl sun visors w/storage pouch, scuff plates, L.H./R.H. molded assist handles, two coat hooks, center mounted dome lamp and L.H./R.H. door courtesy lamps & storage pockets) — Medium Graphite Interior Trim Color	10	420.00	0	0
22B100-AA	— Medium Mocha Interior Trim Color	10	420.00	0	0
22B200-AA	— Cordovan Interior Trim Color	10	420.00	0	0

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	22 — CAB (Continued)				
AGAH00-AA	APPLIED GRAPHICS, ACCENT Continental Fuchsia	0	605.00	0	0
AGAK00-AA	Silver Metallic	0	605.00	0	0
AGAF00-AA	Tan	0	605.00	0	0
AGAJ00-AA	Teal	0	605.00	0	0
AGAG00-AA	Toreador Red	0	605.00	0	0
AGAN00-AA	Heat Fuchsia	0	605.00	0	0
AGAQ00-AA	Silver Metallic	0	605.00	0	0
AGAL00-AA	Tan	0	605.00	0	0
AGAP00-AA	Teal	0	605.00	0	0
AGAM00-AA	Toreador Red	0	605.00	0	0
	23 — CAB EQUIPMENT/ EXTERIOR				
23YG00-AA	Aerodynamic Equipment Full Pkg. (Incl. roof fairing, Code 23YF00, cab side extenders and trim tabs Code 231F00, integral marker lights in lieu of std. cab mounted) (Req. cab valance panels Code 23YJ00 & Special Paint Options 40 & 42) (Avail. w/on-hwy. tractor only)	293	1361.00	0	0
23E100-A3	Prep Pkg. — Reinforcements Only (Aero. prep. pkg.) (For local installation of roof fairing & side extenders) (On-hwy. only)	1	281.00	0	0
23YF00-AA	Roof Fairing Pkg., Cab (Incl. integral lights in lieu of std. cab mounted) (On-hwy. only) (Req. Special Paint Option 40) (N.A. w/side extender pkg. Code 231F00 or prep. pkg. Code 23E100).....	109	683.00	0	0
231F00-AC	Side Extenders Pkg. (Req. cab valance panels Code 23YJ00 & Special Paint Option 42) (Avail. w/on-hwy. tractor only; N.A. w/75 gal. rect. L.H. or dual fuel tanks) (N.A. w/roof fairing pkg. Code 23YF00 or prep. pkg. Code 23E100).....	68	431.00	0	0
	Back-of-Cab Access Pkg. (Avail. for tractor applications only; Incl. steps and grab handles) (N.A. w/forward mtd. 70 gal. cyl. fuel tanks in comb. w/L.H. rear mtd. batteries) (Refer to Quarter Fender Restriction charts in the Appendix at the end of this model for additional restrictions) 60" tandem axle restrictions: • Req. min. 172" wb in comb. w/ all forward mtd. rect. fuel tanks • Req. min. 196" wb in comb. w/ all forward mtd. cyl. fuel tanks except 120 gal. • Req. min. 208" wb in comb. w/ forward mtd. 120 gal. cyl. fuel tanks				
23YA00-CF	Avail. w/ 148" wb (Incl. 24" deck: 1-24" tread plate)	40	460.00	0	0
23YA00-CG	Avail. w/ 160" wb (Incl. 30" deck: 1-30" tread plate)	42	497.00	0	0
23YA00-CH	Avail. w/ 172" wb (Incl. 42" deck: 1-18" & 1-24" tread plate)	53	575.00	0	0
23YA00-CJ	Avail. w/ 184" wb (Incl. 54" deck: 1-24" & 1-30" tread plate)	56	651.00	0	0
23YA00-CK	Avail. w/ 190" wb (Incl. 60" deck: 2-30" tread plates)	58	687.00	0	0
23YA00-CL	Avail. w/ 196" wb (Incl. 66" deck: 2-18" & 1-30" tread plate)	70	725.00	0	0
23YA00-CM	Avail. w/ 208" wb (Incl. 78" deck: 1-18" & 2-30" tread plates)	73	801.00	0	0
23YA00-CN	Avail. w/ 220" thru 256" wb (Incl. 90" deck: 3-30" tread plates)	70	875.00	0	0
STD.	Cab Mounts, Front — Trunnion (Standard)	—	—	S	S
	Cab Suspension, Rear				
23A500-AC	Air (Avail. for on-hwy. applications only) (N.A. w/20K Front Axle Code 10AH00) ...	19	499.00	0	0
STD.	Conventional Rubber (N.A. w/alum. cab) (Standard)	—	—	S	S
23LT00-AA	Hydromount (Avail. w /tractor or on-highway truck only)	2	117.00	0	0

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	23 — CAB EQUIPMENT/ EXTERIOR (Continued)				
STD.	Glass Door Vent Windows, Solar Tinted L.H./ R.H. (Two-way w/locking latch) (Standard)	—	—	S	S
23LX00-AA	Rear Window, DELETE (Avail. w/tractor only)	0	CR 55.00	0	0
23YL00-AA	Rear Window, Fixed — Solar Tinted (Avail. w/truck only; Incl. w/tractor)	15	55.00	0	0
STD.	Rear Window, None (Standard)	—	—	S	S
STD.	Windshield & Side Glass — Solar Tinted (Standard)	—	—	S	S
23A800	Grille, Hood Mounted — Bright (Standard)	—	—	S	S
233C00-AA	Headlamp Bezels, Bright	0	37.00	0	0
23AB00	Hood, Forward Tilting Front End — Without Engine Service Access Door (Standard)	—	—	S	S
230N00-AA	— With Transverse Access Door	N/A	485.00	0	0
232400-AA	— With Ready-Line Access Door (Oil check & fill) (Req. oil fill & dipstick, serviceability enhanced Code 373900) (N.A. w/Cat. 3126 eng.)	6	289.00	0	0
23KH00	Horn, Single — Electric (Standard)	—	—	S	S
23CV00-BJ	Horns, Dual — Electric	1	17.00	0	0
23CW00-BM	— Air, Single Base (N.A. w/Hadley air horns Code 23CX00)	3	95.00	0	0
23CX00-A5	— Air, Hadley Rectangular, Dual Base (N.A. w/single base air horns Code 23CW00; Full aero pkg. Code 23YG00; Roof fairing pkg. Code 23YF00 or cab aero prep. pkg. Code 23E100)	11	121.00	0	0
23YX00	Mirrors, Dual Western (Auxiliary convex mirrors are NOT included) — Painted Med. Titanium (Standard)	—	—	S	S
23YY00-AA	— Bright (1)	0	73.00	0	0
233L00-AA	— Bright, Heated (Incl. I/P switch w/"On" indicator) (1)	1	153.00	0	0
23Y000-AA	— Bright, Lighted (1)	1	104.00	0	0
23Y200-AA	— Bright, Lighted & Heated (Incl. I/P switch w/"On" indicator) (1)	1	184.00	0	0
233K00-AA	— Bright, Motorized, Heated (Incl. I/P switch w/"On" indicator) (1)	8	891.00	0	0
23Y300-AA	— Bright, Motorized, Lighted & Heated (Incl. I/P switch w/"On" indicator) (1)	9	921.00	0	0
233J00-AA	— Bright, Motorized-R.H., Manual-L.H., Heated (Incl. I/P switch w/"On" indicator) (1)	5	660.00	0	0
23Y400-AA	— Bright, Motorized-R.H., Manual-L.H., Lighted & Heated (Incl. I/P switch w/ "On" indicator) (1)	5	691.00	0	0
233B00	Mirrors, Auxiliary Convex (Painted aux. w/painted western mirrors only & bright aux. w/bright western mirrors only exc. "Sweet Spot" which may be used with either painted or bright western mirrors) — 5.5" Dia., Bottom Mounted — w/Painted Mirrors, R.H. only (Standard)	—	—	S	S
230Y00-AD	— w/Painted Mirrors, L.H. & R.H.	1	15.00	0	0
230100-AC	— w/Bright Mirrors, 2	1	13.00	0	0
23Y600-AA	4 — 5.5" Dia., 2 Top & 2 Bottom Mounted — w/Painted Mirrors	1	45.00	0	0
23Y700-AA	— w/Bright Mirrors	1	45.00	0	0
23Y800-AA	2 — 8" Dia., Bottom Mounted (8-7/8" actual size) — w/Painted Mirrors	2	21.00	0	0
23Y900-AA	— w/Bright Mirrors	2	21.00	0	0
230A00-AA	4 — 8" Dia., 2 Top & 2 Bottom Mounted (8-7/8" actual size) — w/Painted Mirrors	5	63.00	0	0
230B00-AA	— w/Bright Mirrors	5	63.00	0	0
232X00-AA	2 — "Sweet Spot" (Painted black)	0	97.00	0	0
230V00-AA	Dual — 8" Dia., Bright Head & Mounting Arms, Fender Mounted, 3-Pt. Mounting (8-7/8" actual size) (N.A. w/sight rods Code 23A400)	4	149.00	0	0
231P00-AA	Single R.H. — 8" Dia., Bright Head & Mounting Arms, Fender Mounted, 3-Pt. Mounting (8-7/8" actual size) (N.A. w/sight rods Code 23A400)	3	75.00	0	0

(1) N.A. w/Painted Aux. Convex Mirrors exc. "Sweet Spot".

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	23 — CAB EQUIPMENT/ EXTERIOR (Continued)				
23BN00-C5	Mirrors, Delete Aux. Convex	-1	CR 15.00	0	0
	Mirror Arms				
23RA00	— 96" (Standard w/ truck)	—	—	S	S
23RA00-AF	— 96" (Avail. w/tractor only)	-1	CR 15.00	0	0
23BP00-CL	— 102" (Avail. w/truck only; Incl. w/tractor)	-1	15.00	0	0
23A400-AV	Sight Rods, Front Fender (N.A. w/fender mounted aux. mirrors)	N/A	27.00	0	0
23YM00-AA	Splash Guard, Wheel Lip — Rubber	9	144.00	0	0
23DD00-AA	Sun Visor, Fiberglass, Exterior (N.A. w/full aero pkg. Code 23YG00, roof fairing pkg. Code 23YF00 or aero prep. pkg. Code 23E100) (Req. Special Paint Option 43)	13	163.00	0	0
23YJ00-AA	Valance Panels, Cab	2	159.00	0	0
STD.	Windshield Wipers, Interval, Electric (w/lift-off "Wet Arm" windshield wiper arms and integral nozzles, electric washer pump & 8-Liter reservoir) (Standard)	—	—	S	S
	24 — CAB EQUIPMENT/ INTERIOR				
24AJ00-BK	Air Conditioning, Integral w/ Heater *	46	833.00	0	0
24AL00	Cigar Lighter I/P Mounted (Standard)	—	—	S	S
	Console, Storage				
24K900-AB	— Floor Mounted (Incl. cup holders (2), coin tray, storage bin, CB radio bin, tray & thermos holder; N.A. w/2-pass. seat Code 25AADF or MT automatic trans.) (Requires I/P mtd. shift control w/MD auto. trans.).....	8	107.00	0	0
24K700-AB	— Header Mounted (Avail. w/Prestige interior trim only; Incl. header mounted single CB hot post & ground).....	5	207.00	0	0
24GC00-AA	Door Locks, Electric L.H. & R.H. (N.A. w/Value Interior Trim Code 22BJ00)	0	141.00	0	0
STD.	Door Locks, Manual L.H. & R.H. (Standard)	—	—	S	S
24B400-BT	Export Decal (For Export only)	0	NC	0	0
24J600-AA	Filter Pkg., Environmental (Incl. fresh air inlet dust filter & recirculated air filter)	2	55.00	0	0
24LC00-AA	Floor Covering, Carpet w/ Vinyl inserts (Avail. w/Prestige interior trim only)	9	43.00	0	0
STD.	Floor Mat, Full Vinyl, Med. Dark Graphite (Standard)	—	—	S	S
STD.	Heater, Defroster/ Demister and Fresh Air Ventilation (Standard)	—	—	S	S
STD.	Lamp, Dome, Center Mounted (Standard)	—	—	S	S
24J900-AA	Lamp, Dome & Reading, Center Mounted (Avail. w/Prestige interior trim only)	0	36.00	0	0
24LB00-AA	Lamp, Reading, Over-Door (2) (Avail. w/Prestige interior trim only)	0	71.00	0	0
	Map Pocket, L.H. Door				
24AM00-AJ	— Avail. w/ Value interior trim Code 22BJ00 only; Incl. w/ Custom trim Code 22BW00 or Prestige interior trim	1	15.00	0	0
	Radio, CB				
24KA00-AA	Antenna, Dual — Mirror Mounted (Incl. single CB hot post & ground mounted in either I/P or header console)	1	204.00	0	0
	Hot Post & Ground				
24BF00-AA	— Dual, I/P Mounted (N.A. w/header mounted storage console Code 24K700)	1	36.00	0	0
24AH00-BA	— Single, I/P Mounted (Avail. with or without header mounted storage console Code 29K700).....	0	19.00	0	0
	Radio, Electronic (Incl. digital clock)				
24KB00-AA	Premium Sound (Incl. power amplifier & four speakers) — AM/FM Stereo w/ Cassette Tape Deck	12	707.00	0	0
	Standard Sound (Incl. two speakers)				
24AF00-CF	— AM/ FM Stereo	10	463.00	0	0
24H200-AA	— AM/ FM Stereo w/ Cassette Tape Deck & Weather Band (Incl. dual display, scan & alarm clock).....	11	537.00	0	0
STD.	Radio, None (Standard)	—	—	S	S
24KC00-AA	Radio Prep. Pkg. (Incl. antenna, antenna lead, two speakers, bezel, mounting bracket & hot lead; Wired for AM/FM Stereo radio)	2	104.00	0	0

* Price excludes Federal Excise Tax of \$100.00 (cdn.). Applies for Canada only.

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	24 — CAB EQUIPMENT/ INTERIOR (Continued)				
24KD00-AA	Steering Column, Adjustable (N.A. w/std. turn signal switch Code 26C700) — Tilt Only	5	319.00	0	0
24KE00-AA	— Tilt and Telescope	7	443.00	0	0
STD.	Steering Column, Stationary (Standard)	—	—	S	S
	Steering Wheel				
24B500	— 18" Dia. (Standard)	—	—	S	S
24KF00-AA	— 18" Dia., Leather Wrapped	0	53.00	0	0
24AP00-B9	— 21" Dia. (Will reduce steering effort approximately 20%; Drivers will experience a lighter road feel than w/18" steering wheel) (N.A. w/speed/cruise control Code 37A100; N.A. w/crankshaft PTO Code 374D00)	2	11.00	0	0
STD.	Sun Visors, Single, Vinyl — L.H. & R.H. (Incl. ticket strap) (Standard)	—	—	S	S
	Sun Visors, Two Way, Vinyl, Integral Side — L.H. & R.H.				
24KG00-AA	— w/ Value or Custom trim (Incl. ticket strap)	0	65.00	0	0
24KG00-AB	— w/ Prestige trim (Incl. storage pouch)	0	73.00	0	0
	Window Control — Electric				
24KJ00-AA	— R.H. Side w/ L.H. Control (Avail. w/Value interior trim Code 22BJ00 only)	4	127.00	0	0
24KK00-AA	— R.H. & L.H. Sides w/ Dual Control (Avail. w/Custom trim Code 22BW00 or Prestige interior trim only)	8	261.00	0	0
STD.	Window Control — Manual (Side Windows) (Standard)	—	—	S	S
24KL00-AA	Window, Observation — R.H. Door (Incl. wide angle Fresnel lens; R.H. side window drop is restricted) (Deletes R.H. door mtd. map pocket w/Custom or Prestige interior trim)	2	175.00	0	0
	25 — SEATING				
	(Seats are color coordinated to cab trim level. Passenger seat matches driver seat in appearance and material; All seats include seat belts)				
25AAC0-AA	Bostrom, Mid-Back, Talladega (Incl. Fore-Aft isolator) Driver, Air-T915, Air Suspension	17	192.00	0	0
25AAC9-AA	Passenger, Air-T915, Air Suspension	72	511.00	0	0
	Bostrom, Hi-Back, Talladega (Incl. Fore-Aft isolator) (N.A. w/armrests w/auto. trans.) Driver, Air-T915, Air Suspension				
25AAC4-AA	w/ Value or Custom cab interior trim	17	353.00	0	0
25AAC4-AJ	w/ Prestige cab interior trim	27	353.00	0	0
	Passenger, Air-T915, Air Suspension				
25AADD-AA	w/ Value or Custom cab interior trim	71	527.00	0	0
25AADD-AJ	w/ Prestige cab interior trim	71	527.00	0	0
	National, Mid-Back (Incl. Fore-Aft isolator except Codes 25AACW, 25AAC5 or 25AAC6)				
25AACW	Driver, Fixed Base, Less Isolator (Standard)	—	—	S	S
25AACX-AA	Driver, Fixed Base	2	15.00	0	0
25AACY-AA	Driver, Air Suspension	52	155.00	0	0
25AAC5-AA	Passenger, Fixed Base "Economy" — Non-Adj., Less Isolator	56	168.00	0	0
25AAC6-AA	Passenger, Fixed Base, Less Isolator	56	236.00	0	0
25AAC7-AA	Passenger, Fixed Base	56	252.00	0	0
25AAC8-AA	Passenger, Air Suspension	78	473.00	0	0
25GH00	Passenger, None (Standard)	—	—	S	S

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	25 — SEATING (Continued)				
25AAC1-AA	National, Hi-Back (Incl. Fore-Aft isolator) (N.A. w/pedestal mtd. auto. trans. shift control) Driver, Fixed Base	7	CR 7.00	0	0
25AAC2-AA	Driver, Air Suspension	49	171.00	0	0
25AADA-AA	Passenger, Fixed Base	51	251.00	0	0
25AADB-AA	Passenger, Air Suspension	63	488.00	0	0
25AADF-AA	National, Companion, Two Passenger, Fixed Base — Non-Adj. (Req. brake control valve delete Code 19BV00 when ordered w/trailer towing pkg. Code 19NH00 or tractor pkg.) (N.A. w/floor mounted storage console Code 24K900) w/ National Driver Seat	61	457.00	0	0
25AADF-AD	w/ Bostrom Driver Seat	61	475.00	0	0
OTHER SEATING EQUIPMENT					
25AADJ-AA	Armrests, Dual (Avail. w/Mid-Back & Hi-Back seats; N.A. w/pedestal mtd. auto. trans. shift control) Driver only	5	72.00	0	0
25AADK-AA	Passenger only (N.A. w/individual seat Code 25AAC5 or 2 pass. seat Code 25AADF)	5	72.00	0	0
25AAEF-AB	Base Cover, Air Suspension (Avail. w/National air suspension seats; Incl. w/Bostrom Hi-Back seats Codes 25AAC4 & 25AADD w/Prestige interior trim; N.A. w/Bostrom Mid-Back seats Codes 25AAC0 & 25AAC9) Driver only	2	63.00	0	0
25AAEG-AB	Passenger	2	63.00	0	0
25AAD3	Belts, Seat — Lap and Shoulder, 3-pt. mounting w/ Adjustable D-Ring Driver only (Standard)	—	—	S	S
25AAT0-AA	Passenger only (Incl. w/passenger seat option)	0	NC	0	0
25AADN-AA	Cushion, Seat, Heated — Electric (Avail. w/National air susp. seat only; N.A. w/swivel base) Driver only	1	108.00	0	0
25AADP-AA	Passenger only	1	108.00	0	0
25AADR-AA	Headrest, Four-Way Adjustable (Avail. w/mid-back seats only) Driver only	2	164.00	0	0
25AADT-AA	Passenger only (N.A. w/National "less isolator" seats Code 25AAC5 or 25AAC6) ..	2	164.00	0	0
25AADV-AA	Lumbar Support, Air (Incl. w/all National air suspension seats Codes 25AAC1, 25AAC2, 25AAC8 & 25AADB; Incl. w/Bostrom Hi-Back seats Codes 25AAC4 & 25AADD w/Prestige interior trim; N.A. w/Bostrom Mid-Back seats Codes 25AAC0 & 25AAC9; Avail. w/all other National seats except Code 25AAC5) Driver only	0	31.00	0	0
25AADW-AA	Passenger only (N.A. w/Code 25AAC5 or 2-pass. seat Code 25AADF)	0	31.00	0	0
25AADX-AA	Map Pocket, Back of Seat (Incl. & avail. w/Bostrom Hi-Back seats Codes 25AAC4 & 25AADD w/Prestige interior trim only; N.A. w/Bostrom Mid-Back seats Codes 25AAC0 & 25AAC9; N.A. w/"Less Isolator" seats Codes 25AACW, 25AAC5 or 25AAC6) Driver only	1	11.00	0	0
25AADY-AA	Passenger only (N.A. w/2-pass. seat Code 25AADF)	1	11.00	0	0
25AAD0-AA	Swivel Base, Seat, Adjustable (Avail. w/National air suspension seats Codes 25AAC1, 25AAC2, 25AAC8 & 25AADB; Avail. w/Bostrom Hi-Back seats Codes 25AAC4 & 25AADD w/Prestige interior trim; N.A. w/Bostrom Mid-Back seats Codes 25AAC0 & 25AAC9; N.A. w/heated cushion Codes 25AADN or 25AADP) Driver only (N.A. w/any pedestal mtd. trans. shift control w/MD auto. trans.)	17	75.00	0	0
25AAD1-AA	Passenger only (N.A. w/2-pass. seat Code 25AADF)	17	75.00	0	0

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	26 — INSTRUMENTS/ GAUGES/ SWITCHES/ WARNING DEVICES				
26MR00	Air Cleaner Restriction Indicator	—	—	S	S
26MT00-AA	Air Cleaner Mounted (<i>Standard</i>)	8	27.00	O	O
26MP00-AA	I/P Mounted				
	Gauges				
26NN00	— Brake Application Air Pressure (<i>N.A. w/tandem axle in comb. w/main locking diff. Code 13AW00, air susp. dump valve Code 48AC00, and inside/outside air code 373T00 or air slide fifth wheel</i>)	0	76.00	O	O
26AM00-A5	— Electronic Cluster (<i>Incl. speedometer, tachometer, fuel level, coolant temp., voltmeter, oil press. & dual air brake press.</i>) (<i>Standard</i>)	—	—	S	S
26NP00-AC	— Hour Meter (<i>Located in tachometer</i>)	1	59.00	O	O
26AN00-AV	— Individual Round (<i>Incl. speedometer, tachometer, fuel level, coolant temp., voltmeter, oil pressure & dual air brake press.</i>) (<i>In lieu of std. electronic cluster Code 26NN00</i>)	0	213.00	O	O
26AN00-AO	— Temperature, Rear Axle Lube				
26AP00-AV	— w/ single Rear Axle	1	49.00	O	O
26M700	— w/ tandem Rear Axle	2	99.00	O	O
STD.	— Temperature, Transmission Oil (<i>N.A. w/FS- manual or any auto. transmission</i>)	2	29.00	O	O
26AX00-BT	Gauges — Control Panel, Flat Gauge Insert — R.H. (<i>Standard</i>)	—	—	S	S
26C700	Parking Brake Control, I/P Mounted (<i>Standard</i>)	—	—	S	S
26MY00-AA	Speedometer, Metric (<i>N.A. in U.S.</i>)	0	NC	O	O
STD.	Turn Signal Switch, Self-Cancelling (<i>Incl. w/truck w/std. stationary steering column</i>) (<i>N.A. w/tilt strg. column Code 24KD00, tilt/telescope strg. column Code 24KE00 or trailer towing pkg. 19NH00</i>) (<i>Standard</i>)	—	—	S	S
STD.	Turn Signal Switch, Signal Stat				
STD.	— Non-Cancelling (<i>Incl. w/tractor and with truck with tilt Code 24KD00 or Telescopic Code 24KE00 steering column; Avail. w/truck w/stationary steering column</i>)	0	107.00	O	O
STD.	Warning Lights				
STD.	— ABS Anti-Lock System (<i>Standard</i>)	—	—	S	S
STD.	— High Beam Indicator (<i>Standard</i>)	—	—	S	S
STD.	— Turn Signal Indicators (<i>Standard</i>)	—	—	S	S
STD.	Warning Light & Buzzer — Air Brakes (<i>Standard</i>)	—	—	S	S
	27 — ELECTRICAL				
270P00-BJ	Canadian Daytime Running Lights (<i>Standard in Canada only</i>)	—	—	S	S
276H00-AA	Daytime Running Lights (<i>N.A. in Canada</i>)	0	65.00	O	O
STD.	Circuits, Customer Access				
27AA80-AA	— Auxiliary Circuits Pkg.	1	65.00	O	O
27AA70-AA	— I/P Fuse Panel Pkg. (<i>Standard</i>)	—	—	S	S
STD.	— Access Circuits Box				
276L00-AB	— Engine Compartment	1	31.00	O	O
27AL00-AE	— Rear of Chassis (<i>N.A. w/tractor applications</i>)	1	31.00	O	O
STD.	— Access Circuits Connector (<i>Engine compt., rear of cab & rear of chassis w/truck applications; Eng. compt. & rear of cab w/tractor applications</i>) (<i>Standard</i>)	—	—	S	S
STD.	— Switch Pkg., Auxiliary	0	29.00	O	O
STD.	Circuit Protectors				
STD.	Breakers, Automatic Reset	N/A	283.00	O	O
STD.	Fuses (<i>Standard</i>)	—	—	S	S
STD.	Flasher, Emergency (<i>Standard</i>)	—	—	S	S

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	27 — ELECTRICAL (Continued)				
27AC00-A9	Lamps, Turn Signal, Fender Mounted, Supplemental (In addition to std.) (N.A. w/std. turn signal switch Code 26C700)	1	71.00	0	0
STD.	Lamps, Turn Signal & Side Marker Combination, Rear/ Side Facing, Hood Mounted (Standard)	—	—	S	S
27G800-A5	Lights, Auxiliary (Mounted below the bumper) (Incl. I/P mounted switch) (N.A. w/front bumper ext. Code 59HC00 or w/front frame ext. Code 40GB00)	5	131.00	0	0
27G700-A5	— Driving Lights (N.A. w/fog lights Code 27G700)	5	131.00	0	0
	— Fog Lights (N.A. w/driving lights Code 27G800)				
	Lights				
	Cab Marker, 5 Lights				
STD.	— Standard (N.A. w/full aerodynamic pkg. Code 23YG00, roof fairing pkg. Code 23YF00 or cab prep. pkg. Code 23E100) (Standard)	—	—	S	S
274800-AB	— Premium (N.A. w/full aerodynamic pkg. Code 23YG00, roof fairing pkg. Code 23YF00 or cab prep. pkg. Code 23E100)	0	48.00	0	0
STD.	Head, Two Rectangular Halogen, Dual Beam (Incl. stalk mounted switch for dimmer and flash to pass) (Standard)	—	—	S	S
STD.	Tail, Two w/ Integral Stop, Turn, Backup, and License Plate (Mounted inside frame rails) (Standard)	—	—	S	S
273300-AA	Trailer Hook-Up, Aimable (Avail. for tractor applications only; use in addition to fixed or unipac hookup light; Incl. I/P switch w/"On" indicator)	2	37.00	0	0
27AB00-A6	Trailer Hook-Up, Fixed (Avail. for truck applications only; Incl. w/tractor pkg.; Incl. I/P switch w/"On" indicator)	1	41.00	0	0
27AAR0-AA	Truck-Lite, Rear Lighting System (In lieu of std.) (N.A. w/tractor ramp frame crossmember Code 40EX00 or truck w/trailer pkg. Code 19NH00)	1	167.00	0	0
	Taillight Mounting				
STD.	— Inside Frame Rails — 21.56" Spacing (Standard)	—	—	S	S
275600-AB	— Outside Frame Rails — 46.07" Spacing (N.A. w/tractor ramp frame crossmember Code 40EX00 or Truck-Lite Code 27AAR0 or 51" A/L susp. w/60" AF)	0	23.00	0	0
276R00-AB	— Rear Frame Crossmember (N.A. w/truck or w/truck w/trailer pkg. Code 19NH00, tractor ramp frame crossmember Code 40EX00 or Truck-Lite Code 27AAR0)	-3	23.00	0	0
	28 — ALTERNATORS				
28BK00	— 95 amp., 1425 watt Motorcraft, Internally Regulated (N.A. w/Cat. 3126 eng.) (Standard)	—	—	S	S
28B300-BJ	— 100 amp., 1400 watt Delco 21 SI, Internally Regulated	-8	19.00	0	0
	29 — BATTERIES/ BOXES/ CABLES (Refer to the Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions)				
	Battery, Maintenance-Free Sterling, 12-Volt				
29HM00	— Two, 600 CCA (65 amp.-hr.) (Standard)	—	—	S	S
29HN00-AP	— Three, 600 CCA (65 amp.-hr.)	47	107.00	0	0
29AP00-BT	— Two, 625 CCA (93 amp.-hr.)	12	49.00	0	0
29AG00-BT	— Three, 625 CCA (93 amp.-hr.)	65	173.00	0	0
29AJ00-B3	— Two, 625 CCA (96 amp.-hr.) (Cycle Power)	18	67.00	0	0
29AK00-B8	— Three, 625 CCA (96 amp.-hr.) (Cycle Power)	74	199.00	0	0
29GM00-BM	— Two, 900 CCA (96 amp.-hr.)	18	63.00	0	0
	Battery Box, Frame Mounted				
29KF00-AA	Aft of Cab, Standard Weight, L.H. (Avail. w/forward mtd. L.H. or R.H. single, or forward mtd. dual fuel tanks)	0	67.00	0	0
	Under Cab, Lightweight — Forward Mounted (Incl. frame mtd. cab access steps) (Avail. w/on-highway service only)				
29KD00-AA	L.H. (Avail. w/forward or rear mtd. R.H. fuel tanks; Avail. w/rear mtd. L.H. single or rear mtd. dual fuel tanks)	-12	128.00	0	0
29LJ00-AA	R.H. (Avail. w/forward mtd. L.H. single fuel tanks only) (N.A. w/dual or mixed tanks)	-12	195.00	0	0

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	29 — BATTERIES/ BOXES/ CABLES (Refer to the Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions) (Continued)				
29KE00	Under Cab, Standard Weight — Forward Mounted (Incl. frame mtd. cab access steps) L.H. (Avail. w/forward or rear mtd. R.H. fuel tanks, rear mtd. L.H. single or rear mtd. dual fuel tanks) (Standard)	—	—	S	S
29LG00-AA	R.H. (Avail. w/forward mtd. L.H. single fuel tanks only) (N.A. w/dual or mixed tanks)	0	67.00	0	0
29KG00-AA	Battery Terminals, Remote (Jump start studs)	0	31.00	0	0
	30 — ENGINES				
	(Engine listings show Advertised Horsepower/Advertised Torque/Governed RPM; For specific ratings and performance curves, see Eng. Section of Component Info. Data Book; See Safety-Noise-Emission Section of Component Book) CATERPILLAR 3126 (ELECTRONIC) DIESEL (Incl. Cat. 1R0739 full-flow oil filter, Cat. 1R0751 fuel filter, electronic fuel pump & governor & engine warning/derate system) (Incl. air intake heater) (Incl. cast iron flywheel housing) (Req. min. 100 amp Delco alternator)				
300600-AA	— 210 HP/ 605 lb.-ft./ 2500 RPM (3)	38	CR 1827.00	0	0
30Y000-AA	— 230 HP/ 660 lb.-ft./ 2400 RPM (3)	38	CR 512.00	0	0
30Y100-AA	— 250 HP/ 660 lb.-ft./ 2400 RPM (3)	38	1028.00	0	0
30Y200-AA	— 250 HP/ 800 lb.-ft./ 2400 RPM (1) (4) (5)	84	1028.00	0	0
30Y300-AA	— 275 HP/ 800 lb.-ft./ 2400 RPM (1) (4) (5)	84	2683.00	0	0
30Y400-AA	— 275 HP/ 860 lb.-ft./ 2400 RPM (1) (4) (5)	84	2683.00	0	0
30Y500-AA	— 300 HP/ 800 lb.-ft./ 2400 RPM (1) (4) (5)	84	4239.00	0	0
30Y600-AA	— 300 HP/ 860 lb.-ft./ 2400 RPM (1) (4) (5)	84	4239.00	0	0
	CUMMINS ISC (ELECTRONIC) DIESEL (Incl. air intake heater)				
300P00	— ISC-215 HP/ 620 lb.-ft./ 2400 RPM (3) (Standard)	—	—	S	S
300Q00-AA	— ISC-230 HP/ 660 lb.-ft./ 2400 RPM (3)	0	1841.00	0	0
300R00-AA	— ISC-250 HP/ 660 lb.-ft./ 2400 RPM (3)	0	3360.00	0	0
300S00-AA	— ISC-250 HP/ 800 lb.-ft./ 2200 RPM (1) (7)	58	3360.00	0	0
301K00	— ISC-275 HP/ 800 lb.-ft./ 2200 RPM (1) (7)	—	—	0	0
300T00-AA	— ISC-285 HP/ 860 lb.-ft./ 2200 RPM (1) (7)	58	5016.00	0	0
300U00-AA	— ISC-300 HP/ 950 lb.-ft./ 2200 RPM (2) (7)	46	6904.00	0	0
	32 — EXHAUST SYSTEM (Refer to Exhaust Restriction charts in the Appendix at the end of this model for additional restrictions.) (See Component Book for installation sketches)				
32FD00	SINGLE HORIZONTAL MUFFLER & HORIZONTAL OUTLET, R.H. (Standard) ... SINGLE HORIZONTAL MUFFLER WITH STRAIGHT VERTICAL OUTLET STACK, R.H. CAB MOUNTED (Incl. exhaust heat shield) (N.A. w/alum. cab) — Over Frame — Cab Mtd. (N.A. w/cab air susp. Code 23A500, full aero pkg. Code 23YG00, cab side extenders Code 231F00, aero reinforcements only pkg. Code 23E100 or flywheel PTO Code 37EF00)	—	—	S	S
32FE00-AA	— Plain Outlet	65	320.00	0	0
32FG00-AA	— Bright Outlet	67	527.00	0	0
	— Under Frame — Cab Mtd. (Avail. w/L.H. fuel tanks only; N.A. w/cab air susp. Code 23A500, full aero pkg. Code 23YG00, cab side extenders Code 231F00 or aero reinforcements only pkg. Code 23E100)				
32FF00-AA	— Plain Outlet	65	320.00	0	0
32FH00-AA	— Bright Outlet	67	527.00	0	0

- (1) Incl. 14", 2-plate ceramic manual adjust. 900 lb.-ft. clutch Code 36AM00.
 (2) Incl. 14", 2-plate ceramic adjust. free 1050 lb.-ft. Code 36FQ00.
 (3) Incl. 830 sq. in. rad. w/1.5" cu/br core in comb. w/auto. trans.
 (4) Req. Kysor "on-off" fan clutch Code 373600 in comb. w/auto. trans.
 (5) Incl. extra cooling radiator Code 37AN00 in comb. w/auto. trans.
 (7) Incl. 900 sq. in. rad. with 2" cu/br core in comb. w/auto. trans.

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	32 — EXHAUST SYSTEM (Refer to Exhaust Restriction charts in the Appendix at the end of this model for additional restrictions.) (See Component Book for installation sketches) (Continued)				
	SINGLE HORIZONTAL MUFFLER WITH STRAIGHT VERTICAL OUTLET STACK, R.H. (Continued)				
	FRAME MOUNTED				
	— Over Frame — Frame Mtd. (N.A. w/flywheel PTO Code 37EF00)				
	— Use without full aero pkg. Code 23YG00 or cab side extenders Code 231F00; Also use with aero prep. pkg. Code 23E100. (Incl. exhaust heat shield)				
32FJ00-AA	— Plain Outlet	110	320.00	0	0
32FL00-AA	— Bright Outlet	112	527.00	0	0
	— Use with full aero pkg. Code 23YG00 or cab side extenders Code 231F00 (Exhaust heat shield deleted)				
32FJ00-AE	— Plain Outlet	104	320.00	0	0
32FL00-AE	— Bright Outlet	106	527.00	0	0
	— Under Frame — Frame Mtd. (Avail. w/L.H. fuel tanks only)				
	— Use without full aero pkg. Code 23YG00 or cab side extenders Code 231F00; Also use with aero prep. pkg. Code 23E100. (Incl. exhaust heat shield)				
32FK00-AA	— Plain Outlet	116	320.00	0	0
32FM00-AA	— Bright Outlet	118	527.00	0	0
	— Use with full aero pkg. Code 23YG00 or cab side extenders Code 231F00 (Exhaust heat shield deleted)				
32FK00-AF	— Plain Outlet	110	320.00	0	0
32FM00-AF	— Bright Outlet	122	527.00	0	0
32FN00-AA	SINGLE TRANSVERSE MUFFLER R.H. & HORIZONTAL OUTLET (Avail. w/single L.H. fuel tanks only)	92	159.00	0	0
	SINGLE TRANSVERSE MUFFLER R.H. WITH STRAIGHT VERTICAL OUTLET STACK, R.H. (Avail. w/single L.H. fuel tanks only)				
	CAB MOUNTED (Incl. exhaust heat shield) (N.A. w/alum. cab) (N.A. w/cab air susp. Code 23A500, full aero pkg. Code 23YG00, cab side extenders Code 231F00 or aero reinforcements only pkg. Code 23E100)				
32FP00-AA	Plain Outlet	87	368.00	0	0
32FR00-AA	Bright Outlet	87	443.00	0	0
	SINGLE VERTICAL MUFFLER WITH STRAIGHT VERTICAL OUTLET STACK, R.H. (N.A. w/R.H. clean CA fuel tanks)				
	CAB MOUNTED (N.A. w/alum. cab or cab air susp. Code 23A500)				
	— Use without full aero pkg. Code 23YG00 or cab side extenders Code 231F00; Use with cab aero prep. pkg. Code 23E100 (Incl. exhaust heat shield)				
32FW00-AA	— Plain Outlet	87	323.00	0	0
32FX00-AF	— Bright Outlet	87	531.00	0	0
	— Use with full aero pkg. Code 23YG00 or cab side extenders Code 231F00 (Exhaust heat shield deleted)				
32FW00-AF	— Plain Outlet	82	323.00	0	0
32FX00-AH	— Bright Outlet	82	531.00	0	0
	FRAME MOUNTED				
	— Use without full aero pkg. Code 23YG00 or cab side extenders Code 231F00; Use with cab aero prep. pkg. Code 23E100 (Incl. exhaust heat shield)				
32FY00-AA	— Plain Outlet	95	323.00	0	0
32F000-AG	— Bright Outlet	95	531.00	0	0
	— Use with full aero pkg. Code 23YG00 or cab side extenders Code 231F00 (Exhaust heat shield deleted)				
32FY00-AF	— Plain Outlet	90	323.00	0	0
32F000-AJ	— Bright Outlet	90	531.00	0	0

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	33 — EXHAUST EQUIPMENT				
33BR00-AM	Rain Cap, Bright (Avail. w/vertical exhaust outlet only) (N.A. w/turn-out elbow Code 33BT00)	4	23.00	0	0
33BT00-AA	Turn-Out, Elbow (In lieu of straight vertical exhaust outlet stack only) (N.A. w/rain cap Code 33BR00) (Plain w/plain exh. & bright w/bright exh.)	2	63.00	0	0
	36 — CLUTCHES				
36FA00	Clutch, Eaton-Spicer 14", 1-plate, Ceramic, Manual Adjustment (660 lb.-ft. cap.) (Std. w/Cat. 3126 210 HP Code 300600, 230 HP Code 30Y000 or 250 HP Code 30Y100 & w/Cum. ISC-215 HP Code 300P00, 230 HP Code 300Q00 or 250 HP Code 300R00) (Standard)	—	—	S	S
36FB00-AM	14", 1-plate, Ceramic, Adjustment-Free (660 lb.-ft. cap.) (Avail. w/Cat. 3126 210 HP Code 300600, 230 HP Code 30Y000 or 250 HP Code 30Y100 & w/Cum. ISC-215 HP Code 300P00, 230 HP Code 300Q00 or 250 HP Code 300R00)	4	52.00	0	0
36AM00-A1	14", 2-plate, Ceramic, Manual Adjustment (900 lb.-ft. cap.) (Avail. w/Cat. 3126 210 HP Code 300600, 230 HP Code 30Y000 or 250 HP Code 30Y100; Cum. ISC-215 HP Code 300P00, 230 HP Code 300Q00 or 250 HP Code 300R00 eng.) (Incl. w/Cat. 3126 250 HP Code 30Y200, 275 HP Code 30Y300, 275 HP Code 30Y400, 300 HP Code 30Y500 or 300 HP Code 30Y600 & w/Cum. ISC-250 HP Code 300S00, 275 HP Code 301K00 or 285 HP Code 300T00)	33	135.00	0	0
36E800-AY	14", 2-plate, Ceramic, Adjustment-Free (900 lb.-ft. cap.) — Avail. w/Cat. 3126 210 HP Code 300600, 230 HP Code 30Y000 or 250 HP Code 30Y100 & w/Cum. ISC-215 HP Code 300P00, 230 HP Code 300Q00 or 250 HP Code 300R00 eng. only	35	188.00	0	0
36E800-A1	— Avail. w/Cat. 3126 250 HP Code 30Y200, 275 HP Code 30Y300, 275 HP Code 30Y400, 300 HP Code 30Y500 or 300 HP Code 30Y600 & w/Cum. ISC-250 HP Code 300S00, 275 HP Code 301K00 or 285 HP Code 300T00 eng. only	2	52.00	0	0
36FQ00-AA	14", 2-plate, Ceramic, Adjustment-Free (1050 lb.-ft. cap.) (Incl. & only avail. w/Cum. ISC-300 HP Code 300U00 eng. only)	37	NC	0	0
STD.	Clutch Housing, Aluminum (For on-hwy. only) (Standard)	—	—	S	S
36AA00-AL	Clutch Housing, Aluminum (For RT-8908LL trans. only) (For on-hwy. only) (N.A. w/Cat. 3126 eng.)	-53	25.00	0	0
36CC00-AC	Remote Lube Fitting — Clutch Throw-out Bearing	0	15.00	0	0
	37 — ENGINE EQUIPMENT				
373P00-AA	Air Cleaner — Donaldson, Dual element, Two Stage (N.A. w/alum. cab)	16	91.00	0	0
375X00-AB	— Donaldson, High Capacity, Single Stage	3	279.00	0	0
STD.	— Donaldson, Single Stage (Standard)	—	—	S	S
373R00-AA	— Farr ECO-II, Single Stage, Disposable	12	315.00	0	0
STD.	Air Intake, Source-Engine — Outside Air (Standard)	—	—	S	S
373T00-AA	— Inside/ Outside Air (Incl. in-cab controls) (Avail. w/truck only) (N.A. w/tandem axle in comb. w/main locking differential Code 13AW00 and air susp. dump valve Code 48AC00)	12	580.00	0	0
37TD00-A0	Block Heater, 110 Volt — Single 1000 Watt Phillips (Incl. front mounted cord & receptacle)	1	45.00	0	0
373W00-AA	Block Heater Receptacle — Under Driver Door Mounted (Avail. w/block heater opt. Code 37TD00 in lieu of front-mounted cord)	1	61.00	0	0
373X00-AA	Dirt Filter/ Bug Screen, Grille Mounted	2	64.00	0	0

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	37 — ENGINE EQUIPMENT (Continued)				
373Y00-AA	Engine Brake, Exhaust (Incl. in-cab controls) (N.A. w/auto. trans.)	15	661.00	0	0
373000	Engine Mounts				
373100-AA	— Compression Type (Standard)	—	—	S	S
	— Focal Mounts (Avail. on-hwy. only) (N.A. w/14,600 lb. Front Axle Code 10A200, 16,000 lb. Front Axle Code 10AF00, 18,000 lb. Front Axle Code 10AD00 or 20,000 lb. Front Axle Code 10AH00) (N.A. w/Cat. 3126 eng.).....	11	147.00	0	0
373200	Engine Shutoff — Key (Solenoid) (Standard)	—	—	S	S
	Fan Clutch				
373400	— Eaton Viscous (Incl. w/all engines w/man. trans.) (Incl. w/Cat. 3126 175 thru 250 HP/660 lb.-ft. & all Cum. ISB and ISC eng. w/auto. trans.) (Standard)	—	—	S	S
373600-AC	— Kysor "On-Off" (Electrically controlled) (Avail. w/all eng. in comb. w/manual trans.) (Avail. w/Cat. 3126 175 HP thru 250 HP/660 lb.-ft. & all Cum. ISC eng. w/auto. trans.) (Req'd w/comb. of Cat. 3126 250 HP/800 lb.-ft. thru 300 HP eng. & auto. trans.)	N/A	315.00	0	0
STD.	Filter, Coolant Conditioner — Fleetguard Spin-On Type (Incl. w/Cum. ISC eng.) (N.A. w/Cat. 3126 eng.) (Standard)	—	—	S	S
STD.	Filter, Fuel/ Water Separator — Fleetguard, Engine Mtd., Unheated (N.A. w/Cat. 3126) (Standard)	—	—	S	S
STD.	Filter, Oil Single 2.6 qt. Disposable — Fleetguard LF3000 Full-Flow & By-Pass Combo, Spin-On Type (Standard)	—	—	S	S
37W100-AD	Fuel Heater, Electric, Fleetguard (N.A. w/Cat. 3126)	0	117.00	0	0
STD.	Fuel Pump, Electronically Controlled (Standard)	—	—	S	S
STD.	Governor, Electronic (Standard)	—	—	S	S
373800-AA	Hose Pkg., Silicone (Incl. radiator, heater, engine drawdown hoses & torque-controlled clamps)	0	179.00	0	0
STD.	Hose, Radiator, EPDM Rubber (Incl. torque-controlled clamps) (Standard)	—	—	S	S
STD.	Oil Cooler, Integral (Standard)	—	—	S	S
373900-AA	Oil Fill & Dipstick, Serviceability Enhanced (N.A. w/Cat. 3126 eng.)	1	55.00	0	0
STD.	Oil Fill System, Standard Oil Fill & Check (Standard)	—	—	S	S
374D00-AA	Power Take-Off, Crankshaft Driven Damper (Incl. radiator mounted (fixed) grille) (Req. speed/cruise control Code 37A100) (Requires extended frame or front bumper extension Code 59HC00; Avail. w/truck only)	12	304.00	0	0
37EF00-AA	Power Take-Off, Flywheel Driven (Avail. w/truck only) (N.A. w/FS-Series trans. or auto. trans.) (N.A. w/Cat. 3126 eng.) (N.A. w/cab rear air susp. Code 23A500)	154	3308.00	0	0
374B00-AA	Radiator, Clog Resistant (830 sq. in. cooling module w/2.0' cu/br core) (N.A. w/any 275 thru 300 HP eng) (N.A. w/250 HP/800 lb.-ft. in comb. w/auto. trans.) (N.A. w/extra cooling Code 37AN00)	49	48.00	0	0
37AN00-AX	Radiator, Extra Cooling — 830 sq. in. cooling module w/ 2.00' cu/br core (Incl. w/Cat. 3126 250 HP/800 lb.-ft. thru 300 HP eng. in comb. w/auto. trans.) (N.A. w/Cum. ISC 250 HP/800 lb.-ft. thru 300 HP eng. in comb. w/auto. trans.) (N.A. where 900 sq. in. module is used) (N.A. w/clog resistant radiator Code 374B00)	48	196.00	0	0
STD.	Radiator, Nominal Cooling — 830 sq. in. cooling module w/ 2.0' alum. core (Standard)	—	—	S	S
37A100-AT	Speed/ Cruise Control	N/A	NC	0	0
STD.	Starter, Electric, Delco 12-Volt (Standard)	—	—	S	S
STD.	Starter Interlock (Clutch Pedal Actuated) (Standard)	—	—	S	S

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	40 — FRAME — SINGLE REAR AXLES ONLY				
40E700-AG	Single Channel 10.76 SM, 120,000 PSI — 148" wb	-135	CR 60.00	O	
STD.	Single Channel 13.3 SM, 120,000 PSI — 148" wb (<i>Standard</i>)	—	—	S	
40E900-AR	— 160" thru 244" wb	0	NC	O	
40FA00-AR	Single Channel 15.9 SM, 120,000 PSI — 148" wb	139	339.00	O	
40FA00-AT	— 160" wb	148	339.00	O	
40FA00-AV	— 172" wb	155	339.00	O	
40FA00-AW	— 184" wb	162	395.00	O	
40FA00-AY	— 190" wb	172	395.00	O	
40FA00-AX	— 196" wb	175	395.00	O	
40FA00-A0	— 208" wb	182	487.00	O	
40FA00-A1	— 220" wb	197	487.00	O	
40FA00-A2	— 232" wb	210	487.00	O	
40FA00-A3	— 244" wb	224	487.00	O	
	40 — FRAME — TANDEM REAR AXLES ONLY				
40E900-CM	Single Channel 13.3 SM, 120,000 PSI — 148" wb	0	NC		O
STD.	— 160" wb (<i>Standard</i>)	—	—		S
40E900-A4	— 172" thru 244" wb	0	NC		O
40FA00-A4	Single Channel 15.9 SM, 120,000 PSI — 148" wb	140	361.00		O
40FA00-A5	— 160" wb	148	361.00		O
40FA00-A6	— 172" wb	155	361.00		O
40FA00-A7	— 184" wb	162	361.00		O
40FA00-A8	— 190" wb	172	431.00		O
40FA00-A9	— 196" wb	175	431.00		O
40FA00-BA	— 208" wb	182	431.00		O
40FA00-BB	— 220" wb	197	431.00		O
40FA00-BC	— 232" wb	210	487.00		O
40FA00-BD	— 244" wb	224	487.00		O
40FE00-AA	Single Channel, Integral, Extended Frame (20.3" from front of bumper to face of grille) (Req. crankshaft-driven PTO; Incl. radiator mounted (fixed) grille; Avail. w/truck only; Avail. w/walking beam or Neway susp. only; N.A. w/bumper extension Code 59GK00, driving lights Code 27G800 or fog lights Code 27G700) (N.A. w/60" front susp.) (N.A. w/HAS-402 susp.) 20.25 SM, 125,000 PSI — 148" wb	414	747.00		O
40FE00-AB	— 160" wb	434	747.00		O
40FE00-AC	— 172" wb	449	747.00		O
40FE00-AD	— 184" wb	465	747.00		O
40FE00-AE	— 190" wb	489	859.00		O
40FE00-AF	— 196" wb	497	859.00		O
40FE00-AG	— 208" wb	513	859.00		O
40FE00-AW	— 220" wb	N/A	859.00		O
40FE00-AX	— 232" wb	N/A	915.00		O
40FE00-AY	— 244" wb	N/A	915.00		O

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	40 — FRAME — TANDEM REAR AXLES ONLY (Continued)				
	Inverted "L" Reinforced (N.A. w/5th wheel options, 60" front springs or any HAS, HFS or Airliner 40K susp.) 20.5 SM, 120,000 PSI (Straight Rail)				
40FB00-AA	— 160" wb	487	503.00		0
40FB00-AB	— 172" wb	515	503.00		0
40FB00-AC	— 184" wb	543	503.00		0
40FB00-AD	— 190" wb	585	615.00		0
40FB00-AE	— 196" wb	600	615.00		0
40FB00-AF	— 208" wb	627	615.00		0
40FB00-AG	— 220" wb	690	615.00		0
40FB00-AH	— 232" wb	750	672.00		0
40FB00-AJ	— 244" wb	802	672.00		0
	Double Channel (N.A. w/5th wheel options, 60" front springs or HAS-400, HAS-40LH or any HFS susp.) 27.0 SM, 120,000 PSI (Straight Rail Reinforced)				
40FC00-AA	— 160" wb	599	907.00		0
40FC00-AB	— 172" wb	634	907.00		0
40FC00-AC	— 184" wb	669	907.00		0
40FC00-AD	— 190" wb	722	1107.00		0
40FC00-AE	— 196" wb	740	1107.00		0
40FC00-AF	— 208" wb	775	1107.00		0
40FC00-AG	— 220" wb	853	1107.00		0
40FC00-AH	— 232" wb	927	1211.00		0
40FC00-AJ	— 244" wb	994	1211.00		0
	Double Channel (N.A. w/5th wheel options, 60" front springs or HAS-400, HAS-40LH or any HFS susp.) 30.0 SM, 120,000 PSI (Straight Rail Reinforced)				
40FD00-AA	— 160" wb	709	1108.00		0
40FD00-AB	— 172" wb	751	1108.00		0
40FD00-AC	— 184" wb	793	1108.00		0
40FD00-AD	— 190" wb	856	1352.00		0
40FD00-AE	— 196" wb	877	1352.00		0
40FD00-AF	— 208" wb	919	1352.00		0
40FD00-AG	— 220" wb	1013	1352.00		0
40FD00-AH	— 232" wb	1097	1479.00		0
40FD00-AJ	— 244" wb	1181	1479.00		0
	FRAME MODIFICATIONS				
	Extended Frame, Front, Integral (20.3" from front of bumper to face of grille) (Req. crankshaft-driven PTO: Incl. radiator mounted (fixed) grille; N.A. w/bumper extension Code 59HC00, driving lights Code 27G800 or fog lights Code 27G700; N.A. w/60" front susp.) (N.A. as 232" or 244" wb tandem axle tractor)				
40GB00-AA	— Avail. w/ 15.9 SM, 120,000 PSI, Frame only (All bolted assy.)	16	327.00	0	0
40GB00-AC	— Avail. w/ 20.5 SM, 120,000 PSI, Frame only	N/A	327.00		0
40GB00-AE	— Avail. w/ 27.0 SM, 120,000 PSI, Frame only	N/A	327.00		0
40GB00-AG	— Avail. w/ 30.0 SM, 120,000 PSI, Frame only	N/A	327.00		0
40EX00-AA	Frame Crossmembers Tractor Ramp Rear Crossmember, Full Width, Steel (Incl. crossmember mtd. taillights in lieu of standard; Avail. w/on-hwy tractor only) (Also N.A. w/square cut frame ends Code 40EN00, Truck-Lite rear lighting Code 27AAR0, reinforced frame or Neway rear susp.)	45	79.00	0	0

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	FRAME MODIFICATIONS (Continued)				
40EN00-AA	Frame End, Rear Square Cut (Avail. w/tractor only; Incl. w/truck)	9	NC	0	0
40EM00-AA	Tapered End Caps, Bolt-on (Avail. w/tractor only; N.A. w/outside frame rail mounted taillights Code 275600 or reinforced frame) (N.A. w/square cut frame ends Code 40EN00 or tractor ramp crossmember Code 40EX00)	12	85.00	0	0
40EL00	Huck Fasteners, Frame (Rear cab supt., intermediate and rear suspension crossmembers) (Standard)	—	—	S	S
40G400-AA	Huck Fasteners, Frame — Delete (All Bolted Frame)	-19	NC	0	0
43 — FUEL TANKS (Refer to the Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions.)					
Rectangular Tanks, Steel — Shallow					
43PA00-AA	45 gal. (CLEAN CA) — Single R.H. (Avail. only w/L.H. under cab battery box)	-26	NC	0	0
43N900-AA	— Single L.H. (Req. R.H. under cab battery box Code 29LG00 or 29LJ00)	-26	CR 73.00	0	0
43L700	55 gal. — Single R.H. (Standard)	—	—	S	S
43L800-AA	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank)	0	NC	0	0
43L900-AA	— Dual (Incl. single draw/single return fuel lines with crossover) (Req. opt. battery box location in comb. w/forward mtd. fuel tank)	196	465.00	0	0
43MB00-AA	80 gal. — Single R.H.	54	240.00	0	0
43MA00-AA	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank)	54	240.00	0	0
43MC00-AA	— Dual (Incl. single draw/single return fuel lines with crossover) (Req. opt. battery box location in comb. w/forward mtd. fuel tank)	309	843.00	0	0
43MD00-AA	Rectangular Tanks, Dual Mixed Capacity, Steel — Shallow (L.H. tank rear mtd. w/R.H. tank fwd. mtd.) (Incl. single draw/single return fuel lines with crossover) 30 gal. L.H., 55 gal. R.H.	168	371.00	0	0
43ME00-AA	55 gal. L.H., 80 gal. R.H.	251	659.00	0	0
Rectangular Tanks, Steel — Deep					
43MX00-AD	50 gal. — Single R.H. (N.A. forward mounted)	17	NC	0	0
43MW00-AA	— Single L.H. (N.A. forward mounted)	17	NC	0	0
43MY00-AA	— Dual (Incl. single draw/single return fuel lines with crossover) (N.A. forward mounted)	236	465.00	0	0
43PE00-AA	60 gal. (CLEAN CA) — Single R.H. (Avail. only w/L.H. under cab battery box)	21	96.00	0	0
43PD00-AA	— Single L.H. (Req. R.H. under cab battery box Code 29LG00 or 29LJ00)	21	96.00	0	0
43M100-AA	75 gal. — Single R.H.	50	240.00	0	0
43M000-AA	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank) (N.A. w/aero side extenders pkg. Code 231F00)	50	240.00	0	0
43M200-AA	— Dual (Incl. single draw/single return fuel lines with crossover) (Req. opt. battery box location in comb. w/forward mtd. fuel tank) (N.A. w/aero side extenders pkg. Code 231F00)	301	843.00	0	0
43M400-AA	100 gal. — Single R.H.	131	279.00	0	0
43N000-AA	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank)	131	279.00	0	0
43M500-AA	— Dual (Incl. single draw/single return fuel lines with crossover) (Req. opt. battery box location in comb. w/forward mtd. fuel tank)	451	1020.00	0	0
43M600-AA	Rectangular Tanks, Dual Mixed Capacity, Steel — Deep (L.H. tank rear mtd. — R.H. tank fwd. mtd.) (Incl. single draw/single return fuel lines with crossover) 50 gal. L.H., 75 gal. R.H.	268	675.00	0	0
43M700-AA	75 gal. L.H., 100 gal. R.H. (N.A. w/aero side extenders pkg. 231F00)	377	955.00	0	0

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	43 — FUEL TANKS (Refer to the Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions.) (Continued)				
	Cylindrical Tanks, Steel — 24" Dia.				
	50 gal. (CLEAN CA)				
43PC00-AA	— Single R.H. (Avail. only w/L.H. under cab battery box)	-44	NC	0	0
43PB00-AA	— Single L.H. (Req. R.H. under cab battery box Code 29LG00 or 29LJ00)	-44	NC	0	0
	70 gal.				
43MF00-AA	— Single R.H.	-4	240.00	0	0
43MG00-AA	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank)	-4	240.00	0	0
43MH00-AA	— Dual (Incl. single draw/single return fuel lines with crossover) (Req. opt. battery box location in comb. w/forward mtd. fuel tank)	193	843.00	0	0
	100 gal.				
43MJ00-AA	— Single R.H.	23	279.00	0	0
43LD00-AA	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank)	23	279.00	0	0
43MK00-AA	— Dual (Incl. single draw/single return fuel lines with crossover) (Req. opt. battery box location in comb. w/forward mtd. fuel tank)	262	1020.00	0	0
	120 gal.				
43GW00-AM	— Dual (Incl. single draw/single return fuel lines with crossover) (Req. opt. battery box location in comb. w/forward mtd. fuel tank)	351	1135.00	0	0
	Cylindrical Dual Mixed Capacity, Steel (L.H. tank rear mtd. — R.H. tank fwd. mtd.) (Incl. single draw/single return fuel lines with crossover) (Req. L.H. forward mtd. battery box)				
43ML00-AA	70 gal. L.H., 100 gal. R.H.	219	955.00	0	0
	Cylindrical Tanks, Aluminum — 24" Dia. (Front mud flaps Code 60AHM0 recommended w/forward mtd. tank)				
	70 gal.				
43MM00-AA	— Single R.H.	-57	288.00	0	0
43MN00-AA	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank)	-57	288.00	0	0
43MP00-AA	— Dual (Incl. single draw/single return fuel lines with crossover) (Req. opt. battery box location in comb. w/forward mtd. fuel tank)	102	1188.00	0	0
	100 gal.				
43FT00-AA	— Single R.H.	-39	324.00	0	0
43D200-AA	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank)	-39	324.00	0	0
43MR00-AA	— Dual (Incl. single draw/single return fuel lines with crossover) (Req. opt. battery box location in comb. w/forward mtd. fuel tank)	138	1369.00	0	0
	120 gal.				
43A000-AM	— Dual (Incl. single draw/single return fuel lines with crossover) (Req. opt. battery box location in comb. w/forward mtd. fuel tank)	245	1499.00	0	0
	Cylindrical Dual Mixed Capacity, Aluminum (L.H. tank rear mtd. — R.H. tank fwd. mtd.) (Incl. single draw/single return fuel lines with crossover) (Req. L.H. forward mtd. battery box) (Front mud flaps Code 60AHM0 recommended)				
43MT00-AB	70 gal. L.H., 100 gal. R.H.	104	1295.00	0	0
	Cylindrical Tanks, Polished Aluminum — 24" Dia. (Front mud flaps Code 60AHM0 recommended w/forward mtd. tank)				
	70 gal.				
43NN00-AE	— Single R.H.	-57	484.00	0	0
43NM00-AC	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank)	-57	484.00	0	0
43NP00-AE	— Dual (Incl. single draw/single return fuel lines with crossover) (Req. opt. battery box location in comb. w/forward mtd. fuel tank)	102	1577.00	0	0
	100 gal.				
43NT00-AF	— Single R.H.	-39	773.00	0	0
43NR00-AD	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank)	-39	773.00	0	0
43NV00-AC	— Dual (Incl. single draw/single return fuel lines with crossover) (Req. opt. battery box location in comb. w/forward mtd. fuel tank)	138	1927.00	0	0
	120 gal.				
43CR00-AV	— Dual (Incl. single draw/single return fuel lines with crossover) (Req. opt. battery box location in comb. w/forward mtd. fuel tank)	245	2105.00	0	0
	Cylindrical Dual Mixed Capacity, Polished Aluminum (L.H. tank rear mtd. — R.H. tank fwd. mtd.) (Incl. single draw/single return fuel lines with crossover) (Req. L.H. forward mtd. battery box) (Front mud flaps Code 60AHM0 recommended)				
43NW00-AD	70 gal. L.H., 100 gal. R.H.	104	1739.00	0	0

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	44 — FUEL TANK EQUIPMENT				
STD.	Fuel Tank Mounting Location Forward Mounted Fuel Tank, (Max Location) (<i>Standard</i>) (Refer to the Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions.)	—	—	S	S
44HM00-AA	Rear Mounted Fuel Tank (N.A. w/CLEAN CA fuel tanks) (N.A. w/mixed fuel tanks) (Refer to the Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions.)	0	79.00	O	O
	Fuel Tank Mounting Supports — Lightweight Tank Mounting Supports (Avail. w/cylindrical tanks for on-hwy. only) — Dual fuel tanks	-70	196.00	O	O
44HP00-AE	— Standard-Weight Tank Supports (<i>Standard</i>)	—	—	S	S
STD.					
44HW00-AW	Fuel Lines — Dual Draw/Dual Return Without Under Tank Crossover (Avail. w/equal capacity dual fuel tanks only) (N.A. w/instr. pnl. mtd. pushbutton control for Allison electronic trans. Code 57C400 in comb. w/any horiz. muffler system)	3	19.00	O	O
	Steps Cab Length, Fuel Tank Mounted (<i>Standard</i>)	—	—	S	S
STD.					
	46 — SUSPENSION, FRONT (Optimum ride and handling qualities are obtained with matched suspension. Mixed taper-leaf and multi-leaf suspensions on a vehicle is not available. See Component Book for details)				
46CT00	Suspension, Front, Multi-Leaf, 54" Spread (N.A. w/taper-leaf rear susp.) 10,000 lb. Cap. for 10,000 lb. Front Axle Code 10AG00 (Incl. w/axle) (<i>Standard</i>) ..	—	—	S	S
46CT00-AC	10,000 lb. Cap. for 12,000 lb. Front Axle Code 10AE00	-20	CR 25.00	O	O
46CV00-AA	12,000 lb. Cap. for 10,000 lb. Front Axle Code 10AG00	20	25.00	O	O
46CV00-AC	12,000 lb. Cap. for 12,000 lb. Front Axle Code 10AE00 (Incl. w/axle)	0	NC	O	O
46CV00-AE	12,000 lb. Cap. for 13,000 lb. Front Axle Code 10AM00	-15	CR 25.00	O	O
46CW00-AA	13,200 lb. Cap. for 12,000 lb. Front Axle Code 10AE00	15	25.00	O	O
46CW00-AC	13,200 lb. Cap. for 13,000 lb. Front Axle Code 10AM00 (Incl. w/axle)	0	NC	O	O
46CW00-AE	13,200 lb. Cap. for 14,600 lb. Front Axle Code 10A200	-48	CR 25.00	O	O
46CX00-AA	14,600 lb. Cap. for 13,000 lb. Front Axle Code 10AM00	48	25.00	O	O
46CX00-AC	14,600 lb. Cap. for 14,600 lb. Front Axle Code 10A200 (Incl. w/axle)	0	NC	O	O
46CX00-AE	14,600 lb. Cap. for 16,000 lb. Front Axle Code 10AF00	-36	CR 25.00	O	O
46CY00-AA	16,000 lb. Cap. for 14,600 lb. Front Axle Code 10A200	36	25.00	O	O
46CY00-AC	16,000 lb. Cap. for 16,000 lb. Front Axle Code 10AF00 (Incl. w/axle)	0	NC	O	O
46C000-AA	18,000 lb. Cap. for 16,000 lb. Front Axle Code 10AF00	5	25.00	O	O
46C000-AB	18,000 lb. Cap. for 18,000 lb. Front Axle Code 10AD00 (Incl. w/axle)	0	NC	O	O
46C000-AC	18,000 lb. Cap. for 20,000 lb. Front Axle Code 10AH00	-19	CR 25.00	O	O
46C100-AA	20,000 lb. Cap. for 18,000 lb. Front Axle Code 10AD00	19	25.00	O	O
46C100-AB	20,000 lb. Cap. for 20,000 lb. Front Axle Code 10AH00	0	NC	O	O
	Suspension, Front, Taper-Leaf, 54" Spread (Incl. front shock absorbers) (N.A. w/multi-leaf rear susp.)				
46C500-AB	10,000 lb. Cap. for 10,000 lb. Front Axle Code 10AG00 (N.A. for severe duty)	-23	149.00	O	O
46C600-AA	12,000 lb. Cap. for 10,000 lb. Front Axle Code 10AG00 (N.A. for severe duty)	-15	175.00	O	O
46C600-AB	12,000 lb. Cap. for 12,000 lb. Front Axle Code 10AE00 (N.A. for severe duty)	-35	149.00	O	O
46C700-AF	12,000 lb. Cap. for 12,000 lb. Front Axle Code 10AE00 (w/premium bushings) (Avail. w/on-hwy tractor only).....	N/A	363.00	O	O
46C800-AA	13,200 lb. Cap. for 13,000 lb. Front Axle Code 10AM00 (N.A. for severe duty)	-24	149.00	O	O
46C800-AD	13,200 lb. Cap. for 14,600 lb. Front Axle Code 10A200 (Avail. w/truck or on-off hwy. tractor; N.A. for severe duty).....	-72	125.00	O	O
46C900-AA	14,600 lb. Cap. for 13,000 lb. Front Axle Code 10AM00 (Avail. w/truck or on-off hwy. tractor only; N.A. for severe duty).....	-10	175.00	O	O
46C900-AB	14,600 lb. Cap. for 14,600 lb. Front Axle Code 10A200 (N. A. for severe duty)	-58	149.00	O	O

NOTE: All capacity ratings shown represent on-highway application.

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	46 — SUSPENSION, FRONT <i>(Optimum ride and handling qualities are obtained with matched suspension. Mixed taper-leaf and multi-leaf suspensions on a vehicle is not available. See Component Book for details) (Continued)</i>				
46DA00-AA	Suspension, Front, Taper-Leaf, 60" Spread (Incl. front shock absorbers) (N.A. w/multi-leaf rear susp.) 12,000 lb. Cap. for 12,000 lb. Front Axle Code 10AE00 (Avail. w/on-hwy. tractor only)	11	167.00	0	0
46DB00-AA	12,000 lb. Cap. for 12,000 lb. Front Axle Code 10AE00 (w/premium bushings) (Avail. w/on-hwy. tractor only)	32	181.00	0	0
46DC00-AA	13,200 lb. Cap. for 13,000 lb. Front Axle Code 10AM00 (Avail. w/on-hwy. tractor only)	26	NC	0	0
46DD00-AA	14,600 lb. Cap. for 14,600 lb. Front Axle Code 10A200 (Incl. TAS-65 power steering gear. Avail. w/on-hwy. tractor only)	15	NC	0	0
	47 — SUSPENSION, REAR, SINGLE AXLE <i>(All susp. hts. listed are for empty condition) (Optimum ride and handling qualities are obtained with matched suspension. Mixed taper-leaf and multi-leaf suspensions on a vehicle is not available. See Component Book for details)</i>				
47J500-AA	Suspension, Rear, Multi-Leaf (N.A. w/taper-leaf front susp.) 17,500 lb. Cap. for 19,000 lb. Rear Axle (Susp. ht. 10.65")	-38	CR 28.00	0	
47J600-AA	19,000 lb. Cap. for 19,000 lb. Rear Axle (Susp. ht. 10.75")	0	NC	0	
47J600-AB	19,000 lb. Cap. for 21,000 lb. Rear Axle (Susp. ht. 10.75")	0	CR 28.00	0	
47J700-AA	21,000 lb. Cap. for 19,000 lb. Rear Axle (Normal Ride) (46") (Susp. ht. 10.88" w/under 12,000 lb. F.A.; Susp. ht. 11.88" w/12,000 lb. or higher F.A.)	0	28.00	0	
47J700	21,000 lb. Cap. for 21,000 lb. Rear Axle (Normal Ride) (46") (Susp. ht. 10.88" w/under 12,000 lb. F.A.; Susp. ht. 11.88" w/12,000 lb. or higher F.A.) (Standard)	—	—	S	
47LS00-AA	21,000 lb. Cap. for 21,000 lb. Rear Axle (Soft Ride) (52") (Susp. ht. 9.18" w/under 12,000 lb. F.A.; Susp. ht. 10.18" w/12,000 lb. or higher F.A.) (Avail. w/on-hwy. tractor only)	-13	93.00	0	
47J700-AB	21,000 lb. Cap. for 23,000 lb. Rear Axle (Normal Ride) (46") (Susp. ht. 10.88" w/under 12,000 lb. F.A.; Susp. ht. 11.88" w/12,000 lb. or higher F.A.)	0	CR 28.00	0	
47LS00-AC	21,000 lb. Cap. for 23,000 lb. Rear Axle (Soft Ride) (52") (Susp. ht. 9.18" w/under 12,000 lb. F.A.; Susp. ht. 10.18" w/12,000 lb. or higher F.A.) (Avail. w/on-hwy. tractor only)	-13	65.00	0	
47KA00-AA	23,000 lb. Cap. for 21,000 lb. Rear Axle (46") (Susp. ht. 11.28" w/under 12,000 lb. F.A.; Susp. ht. 12.28" w/12,000 lb. or higher F.A.) (Avail. w/truck only)	4	28.00	0	
47KA00-AB	23,000 lb. Cap. for 23,000 lb. Rear Axle (46") (Susp. ht. 11.28" w/under 12,000 lb. F.A.; Susp. ht. 12.28" w/12,000 lb. or higher F.A.) (Avail. w/truck only)	4	NC	0	
47J900-AA	24,500 lb. Cap. for 23,000 lb. Rear Axle (Avail. for truck only) (Susp. ht. 12.00") ...	61	28.00	0	
	Suspension, Rear, Taper-Leaf (Avail. for on-hwy. tractor applications only; Incl. rear shock absorbers) (N.A. w/multi-leaf front susp.)				
47JN00-AA	19,000 lb. Cap. for 19,000 lb. Rear Axle (Susp. ht. 9.45")	-52	61.00	0	
47JP00-AB	21,000 lb. Cap. for 19,000 lb. Rear Axle (Normal Ride) (46") (Susp. ht. 9.72" w/under 12,000 lb. F.A.; Susp. ht. 10.72" w/12,000 lb. or higher F.A.)	-48	89.00	0	
47JP00-AA	21,000 lb. Cap. for 21,000 lb. Rear Axle (Normal Ride) (46") (Susp. ht. 9.72" w/under 12,000 lb. F.A.; Susp. ht. 10.72" w/12,000 lb. or higher F.A.)	-48	61.00	0	
47JP00-AC	21,000 lb. Cap. for 23,000 lb. Rear Axle (Normal Ride) (46") (Susp. ht. 9.72" w/under 12,000 lb. F.A.; Susp. ht. 10.72" w/12,000 lb. or higher F.A.)	-48	33.00	0	
47LT00-AD	21,000 lb. Cap. for 21,000 lb. Rear Axle (Soft Ride) (52") (Susp. ht. 9.02" w/under 12,000 lb. F.A.; Susp. ht. 10.02" w/12,000 lb. or higher F.A.)	4	155.00	0	
47LT00-AA	21,000 lb. Cap. for 23,000 lb. Rear Axle (Soft Ride) (52") (Susp. ht. 9.02" w/under 12,000 lb. F.A.; Susp. ht. 10.02" w/12,000 lb. or higher F.A.)	4	127.00	0	

NOTE: All capacity ratings shown represent on-highway application.

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	47 — SUSPENSION, REAR, SINGLE AXLE (All susp. hts. listed are for empty condition) (Optimum ride and handling qualities are obtained with matched suspension. Mixed taper-leaf and multi-leaf suspensions on a vehicle is not available. See Component Book for details) (Continued)				
47JM00-AC	Suspension, Rear, Air 19,000 lb. Cap., Hendrickson Air, HAS-190 for 19,000 lb. Rear Axle (Avail. for on-hwy. tractor only; Incl. I/P mtd. air susp. dump valve) (N.A. for severe duty) (Susp. ht. 8.50")	-48	1277.00	0	
47LW00-AA	21,000 lb. Cap. AirLiner Air Susp. w/inner wheel chain clearance (1) (Incl. transverse control rods; brake camshaft support brackets & two shock absorbers) (Susp. ht. 8.50") (N.A. w/2-speed rear axle)	N/A	549.00	0	
47LW00-AD	— Avail. w/on-hwy. truck only	N/A	652.00	0	
47KE00-AA	21,000 lb. Cap., Hendrickson Air, HAS-210 for 21,000 lb. Rear Axle (N.A. for severe duty)	-82	1115.00	0	
47KE00-AE	— Avail. w/tractor only (Incl. I/P mtd. air susp. dump valve)	-18	1277.00	0	
47LX00-AA	23,000 lb. Cap. AirLiner Air Susp. w/inner wheel chain clearance (1) (Incl. transverse control rods; brake camshaft support brackets & two shock absorbers) (Susp. ht. 10.00") (N.A. for severe duty) (N.A. w/2-speed rear axle)	N/A	1129.00	0	
47LX00-AD	— Avail. w/truck only	N/A	1232.00	0	
47KF00-AA	23,000 lb. Cap., Hendrickson Air, HAS-230 for 23,000 lb. Rear Axle (N.A. for severe duty) (Susp. ht. 8.50")	-65	1115.00	0	
47KF00-AF	— Avail. w/tractor only (Incl. I/P mtd. air susp. dump valve)	-1	1277.00	0	
47KG00-AA	23,000 lb. Cap. Neway Air, AD-123 (Avail. w/RS-23-161 23,000 lb. rear axle only) (N.A. w/fifth wheel) (N.A. for severe duty) (Susp. ht. 8.75")	45	1831.00	0	
47KG00-AF	— Avail. w/truck only	106	1992.00	0	
47KH00	Suspension, Rear, Auxiliary (Recommended for use w/high center-of-gravity loads and/or off-hwy. operations)	—	—	S	
47KH00-AC	Single Leaf (Standard w/truck only)	61	72.00	0	
47KJ00-AA	Single Leaf (Avail. w/tractor only) (N.A. w/air ride suspensions)	44	105.00	0	
47KJ00-AH	Multi-Leaf (Avail. w/truck only) (N.A. w/soft ride or air ride suspension)	NO CODE	MATCH FOUND	0	
	47 — SUSPENSION, REAR, TANDEM (All susp. hts. listed are for empty condition)				
47AW00	SUSPENSION, REAR FOR 34,000 LB. AXLES 34,000 lb. Cap. Hendrickson Steel Walking Beam — 52" Axle Spacing (N.A. w/alum. cab)	—	—	S	
47AX00-AT	U2-340 (Susp. ht. 10.30") (Standard)	117	93.00	0	
47KL00-AA	UE2-340 (N.A. w/reinforced frames) (Susp. ht. 11.23")	-206	CR 863.00	0	
47KM00-AH	36,000 lb. Cap. Hendrickson 4-Spring HFS-40LH (Avail. w/on-hwy. tractor only; 12,000 lb. max. Front Axle; 80,000 lbs. max. GCWR; N.A. for lift axle applications) (Susp. ht. 10.00")	-134	387.00	0	

(1) Refer to Appendix for Suspension Applications.

NOTE: All capacity ratings shown represent on-highway application.

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	47 — SUSPENSION, REAR, TANDEM (All susp. hts. listed are for empty condition) (Continued)				
	SUSPENSION, REAR FOR 40,000 LB. AXLES				
	34,000 lb. Cap. Hendrickson Steel Walking Beam — 52" Axle Spacing (N.A. w/alum. cab)				
47AW00-AX	U2-340 (Susp. ht. 10.30")	0	NC		0
47AX00-A3	UE2-340 (N.A. w/reinforced frames) (Susp. ht. 11.23")	117	93.00		0
	36,000 lb. Cap. Hendrickson 4-Spring				
47KL00-AB	HFS-40LH (Avail. w/on-hwy. tractor only) (12,000 lb. max. Front Axle; 80,000 lbs. max. GCWR; N.A. for lift axle applications or reinforced frame) (Susp. ht. 10.00")	-206	CR 863.00		0
47K900-AA	HFS-400 (Avail. w/on-hwy. truck only; 14,600 lb. max. Front Axle; N.A. w/reinforced frame) (Susp. ht. 10.11")	-153	CR 795.00		0
	40,000 lb. Cap. AirLiner Extra Duty Air Susp. — 51" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember, heavy duty axle housing & restrained axle seats) (Susp. ht. 8.50") (Avail. w/14,600 lb. max. front axle; max. 40,000 lb. rear axle) (Avail. only w/13.3 SM and 15.9 SM frame) (Refer to the frame chart for GVWR & WB restrictions)				
47L000-AA	— Avail. w/on-hwy. truck only	N/A	CR 359.00		0
47L000-AD	— Avail. w/on-hwy. tractor (Incl. I/P mtd. air susp. dump valve)	N/A	CR 256.00		0
	40,000 lb. Cap. Hendrickson Steel Walking Beam — 52" Axle Spacing (N.A. w/alum. cab)				
47AY00-AT	RT2-400 w/ Rubber Center Bushings (Susp. ht. 11.15")	248	501.00		0
47A000-AT	RT2-400 w/ Bronze Center Bushings (Susp. ht. 11.15")	249	693.00		0
47A100-AL	RT2-400 w/ Transverse Torque Rods & Rubber Center Bushings (Susp. ht. 11.15")	315	908.00		0
47A300-AT	RTE2-400 w/ Rubber Center Bushings (N.A. w/reinforced frames) (Susp. ht. 11.17")	299	633.00		0
47A400-AT	RTE2-400 w/ Bronze Center Bushings (N.A. w/reinforced frames) (Susp. ht. 11.17")	310	825.00		0
47A500-AL	RTE2-400 w/ Transverse Torque Rods and Rubber Center Bushings (N.A. w/reinforced frames) (Susp. ht. 11.17")	368	1109.00		0
47A700-AK	RS-400 w/ Rubber Center Bushings (Rubber sprung) (Avail. for truck only) (Susp. ht. 10.52")	40	1925.00		0
	40,000 lb. Cap. Hendrickson 4-Spring				
47KN00-AG	HFS-400 — Avail. w/on-hwy. tractor only (14,600 lb. max. Front Axle; N.A. w/reinforced frame) (Susp. ht. 10.11")	-153	CR 796.00		0

(1) Refer to Appendix for Suspension Applications.

NOTE: All capacity ratings shown represent on-highway application.

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	47 — SUSPENSION, REAR, TANDEM (All susp. hts. listed are for empty condition) (Continued)				
	SUSPENSION, REAR FOR 40,000 LB. AXLES (Continued)				
	40,000 lb. Cap. Hendrickson Air — 52" Axle Spacing (N.A. when differential main lockout Code 13AW00 is used in comb. w/air slide fifth wheel)				
47KM00-AK	HAS-40LH w/ Transverse Torque Rods (12,000 lb. max. Front Axle; 80,000 lb. max. GCWR; N.A. for lift axle applications, reinforced frame or MD-Series trans.) — Avail. w/ on-hwy. tractor only (Incl. I/P mtd. air susp. dump valve) (Susp. ht. 8.50").....	-81	387.00		0
47KP00-AA	HAS-400 w/ Transverse Torque Rods (14,600 lb. max. Front Axle; 55,000 lb. max. GVWR; 120,000 lb. max. GCWR; N.A. for lift axle applications, reinforced frame or MD-Series trans.) (Susp. ht. 8.50") — Avail. w/ on-hwy. truck only	-27	359.00		0
47KP00-AB	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve)	-24	521.00		0
	HAS-402 w/ Transverse Torque Rods (Avail. w/16-, 18- or 20,000 lb. Front Axle; Max. 66,000 lb. GVW; Max. 55,000 lb. GVW w/tag or pusher axle in the raised position) (N.A. w/20.5 SM "Inverted-L" reinforced frame, 20.25 SM extended frame or MD-Series trans.) (N.A. for severe duty)(Susp. ht. 8.50")				
47KR00-AA	— Avail. w/ truck only (Approved for single lift axle truck applications) (Site travel rating for tandem axle not to exceed 50,000 lb. on rear susp.).....	-13	328.00		0
47KR00-AG	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve)	-10	491.00		0
	40,000 lb. Cap. AirLiner Extra Duty Air Susp. w/ inner wheel chain clearance — 55" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember) (Includes heavy duty axle housing & restrained axle seats) (Susp. ht. 8.50") (Avail. w/14,600 lb. max. front axle; max. 40,000 lb. rear axle) (Avail. only w/13.3 SM and 15.9 SM frame) (Refer to the frame chart for GVWR & WB restrictions)				
47L300-AA	— Avail. w/ on-hwy. truck only	N/A	CR 55.00		0
47L300-AD	— Avail. w/ on-hwy. tractor (Incl. I/P mtd. air susp. dump valve)	N/A	49.00		0

(1) Refer to Appendix for Suspension Applications.

NOTE: All capacity ratings shown represent on-highway application.

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	47 — SUSPENSION, REAR, TANDEM (All susp. hts. listed are for empty condition) (Continued)				
	SUSPENSION, REAR FOR 40,000 LB. AXLES (Continued)				
	40,000 lb. Cap. AirLiner Extra Duty Air Susp. w/inner wheel chain clearance — 59" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember) (Includes heavy duty axle housing & restrained axle seats) (Susp. ht. 8.50") (Avail. w/14,600 lb. max. front axle; max. 40,000 lb. rear axle) (Avail. only w/13.3 SM and 15.9 SM frame) (Refer to the frame chart for GVWR & WB restrictions)				
47L600-AA	— Avail. w/ on-hwy. truck only	N/A	CR 55.00		0
47L600-AD	— Avail. w/ on-hwy. tractor (Incl. I/P mtd. air susp. dump valve)	N/A	49.00		0
	40,000 lb. Cap. Hendrickson Steel Walking Beam — 60" Axle Spacing (N.A. w/alum. cab)				
47BF00-AH	RT2-400 w/ Transverse Torque Rods & Rubber Center Bushings (Susp. ht. 11.13")	405	1293.00		0
47BG00-AH	RTE2-400 w/ Transverse Torque Rods & Rubber Center Bushings (N.A. w/reinforced frames) (Susp. ht. 11.14")	387	1425.00		0
	40,000 lb. Cap. Hendrickson Air — 60" Axle Spacing				
	HAS-400 w/ Transverse Torque Rods (14,600 lb. max. Front Axle; 55,000 lb. max. GVWR; 120,000 lb. max. GCWR; N.A. for lift axle applications, reinforced frame or MD-Series trans.) (Susp. ht. 8.50")				
47KT00-AA	— Avail. w/ on-hwy. truck only	-19	1072.00		0
47KT00-AB	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve)	-16	1235.00		0
	46,000 lb. Cap. Neway Air — 54" Axle Spacing (N.A. for severe duty) (Susp. ht. 8.75")				
47KV00-AA	AD-246 w/ Transverse Torque Rods (Avail. w/truck only)	138	2573.00		0
47KV00-AB	AD-246 w/ Transverse Torque Rods (Incl. air suspension dump valve Code 48AC00 & square cut frame ends Code 40EN00; Avail. w/tractor only) ..	150	2735.00		0
	46,000 lb. Cap. Neway Air — 60" Axle Spacing (N.A. for severe duty) (Susp. ht. 8.75")				
47KW00-AA	AD-246 w/ Transverse Torque Rods (Avail. w/truck only)	138	2941.00		0
47KW00-AB	AD-246 w/ Transverse Torque Rods (Incl. air suspension dump valve Code 48AC00 & square cut frame ends Code 40EN00; Avail. w/tractor only) ..	150	3103.00		0
	SUSPENSION, REAR FOR 46,000 LB. AXLES				
	46,000 lb. Cap. AirLiner Susp. — 51" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember, heavy duty axle housing & welded axle seats) (Susp. ht. 10.0") (Avail. only w/13.3, 15.9, 26.0, 27.0 and 30.0 frames) (N.A. for severe duty) (Refer to the frame chart for GVWR & WB restrictions)				
47L700-AA	— Avail. w/ truck only	N/A	151.00		0
47L700-AC	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve Code 48AC00)	N/A	253.00		0
	46,000 lb. Cap. AirLiner Air Susp. w/inner wheel chain clearance — 55" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember, heavy duty axle housing & welded axle seats) (Susp. ht. 10.0") (Avail. only w/13.3, 15.9, 26.0, 27.0 and 30.0 frames) (N.A. for severe duty) (Refer to the frame chart for GVWR & WB restrictions)				
47L800-AA	— Avail. w/ truck only	N/A	379.00		0
47L800-AC	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve Code 48AC00)	N/A	481.00		0
	46,000 lb. Cap. AirLiner Air Susp. w/inner wheel chain clearance — 59" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember, heavy duty axle housing & welded axle seats) (Susp. ht. 10.0") (Avail. only w/13.3, 15.9, 26.0, 27.0 and 30.0 frames) (N.A. for severe duty) (Refer to the frame chart for GVWR & WB restrictions)				
47L900-AA	— Avail. w/ truck only	N/A	379.00		0
47L900-AC	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve Code 48AC00)	N/A	481.00		0

(1) Refer to Appendix for Suspension Applications.

NOTE: All capacity ratings shown represent on-highway application.

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	47 — SUSPENSION, REAR, TANDEM (All susp. hts. listed are for empty condition) (Continued)				
47BB00-AL	SUSPENSION, REAR FOR 46,000 LB. AXLES (Continued) 46,000 lb. Cap. Hendrickson Steel Walking Beams — 54" Axle Spacing (N.A. w/alum. cab) RT2-460 w/ Transverse Torque Rods & Rubber Center Bushings (Susp. ht. 11.51")	73	1111.00		0
47BE00-AK	RS-460 w/ Bronze Center Bushings (Rubber sprung) (Avail. for truck only) (Susp. ht. 10.51")	-200	3100.00		0
47BH00-AH	46,000 lb. Cap. Hendrickson Steel Walking Beams — 60" Axle Spacing (N.A. w/alum. cab) RT2-460 w/ Transverse Torque Rods & Rubber Center Bushings (Susp. ht. 11.36")	86	1275.00		0
47KV00-AV	46,000 lb. Cap. Neway Air — 54" Axle Spacing (N.A. for severe duty) (Susp. ht. 8.75") AD-246 w/ Transverse Torque Rods (Avail. w/truck only)	-246	1224.00		0
47KW00-A2	AD-246 w/ Transverse Torque Rods (Incl. air suspension dump valve Code 48AC00 & square cut frame ends Code 40EN00; Avail. w/tractor only) ..	-234	1387.00		0
47KW00-AX	46,000 lb. Cap. Neway Air — 60" Axle Spacing (N.A. for severe duty) (Susp. ht. 8.75") AD-246 w/ Transverse Torque Rods (Avail. w/truck only)	-246	1592.00		0
	AD-246 w/ Transverse Torque Rods (Incl. air suspension dump valve Code 48AC00 & square cut frame ends Code 40EN00; Avail. w/tractor only) ..	-234	1755.00		0
	48 — SUSPENSION EQUIPMENT				
48AC00-AJ	Air Suspension Dump Valve — I/P mounted (In-cab control to release air pressure from air susp.) (Avail. for trucks w/air rear suspension only; Incl. for tractors w/air rear suspension; N.A. w/tandem axle when differential main lockout Code 13AW00 is used in comb. w/air slide fifth wheel or inside/outside air Code 373T00)	3	163.00	0	0
	50/ 51/ 52/ 53/ 54 — TIRES-WHEELS (See Tire-Wheel Prices tab section for order codes, weights and prices; See Tire/Wheel/Axle Availability tab section for usage; see Component Book for other restrictions)				
50ACLO	Tires, Front Two, 275/ 80R 22.5G (14PR) Michelin XZE	—	—	S	S
51ACLO	Tires, Rear Four, 275/ 80R 22.5G (14PR) Michelin XZE	—	—	S	
51ACLO	Eight, 275/ 80R 22.5G (14PR) Michelin XZE	—	—		S
52G000	Wheels, Front Two, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	—	—	S	S
53G000	Wheels, Rear Four, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	—	—	S	
53G000	Eight, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	—	—		S
	55 — WHEEL & TIRE EQUIPMENT				
55CY00-AC	Hub Covers, Bright (Incl. Bright Nut Covers) (Req. 10-hole disc wheels) (N.A. w/steel wheels in comb. w/either alum. hubs or high tensile ferrous hubs) (Avail. w/22.5 x 7.50, 22.5 x 8.25 or 24.5 x 8.25 steel wheels only; Avail. w/22.5 x 8.25 or 24.5 x 8.25 alum. wheels only) — Front (2)	1	119.00	0	0
55CZ00-AE	— Rear, Single Axle (2)	5	119.00	0	
55CZ00-AF	— Rear, Tandem Axle (4)	5	172.00		0

NOTE: All capacity ratings shown represent on-highway application.

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	55 — WHEEL & TIRE EQUIPMENT (Continued)				
55CW00-AC	Nut Covers, Bright, Threaded (Avail. w/10-hole disc wheels only) (N.A. w/steel wheels in comb. w/either alum. hubs or high tensile ferrous hubs) (Avail. w/22.5 x 7.50, 22.5 x 8.25 or 24.5 x 8.25 steel wheels only; Avail. w/22.5 x 8.25 or 24.5 x 8.25 alum. wheels only)	1	64.00	0	0
55CX00-AE	— Front (20)	1	64.00	0	
55CX00-AF	— Rear, Single Axle (20)	2	128.00		0
STD.	— Rear, Tandem Axle (40)	—	—	S	S
	Wheels, I.S.O. Steel Disc (Painted "Vendor White" — Not Pure White or Diamond White) (Standard)				
	56 — TRANSMISSIONS				
56SE00	5-Speed Direct Eaton				
56SF00	— FS-6305A (Standard)	—	—	S	S
	— FS-6305B (Avail. w/Cum. ISC eng. only)	—	—	0	
56M300-AX	6-Speed Direct Eaton	5	1095.00	0	0
56CB00-AY	— FS-6306A				
56AW00-AH	9-Speed Direct Fuller	14	1325.00	0	0
56QJ00-AA	— RT-6609A (Incl. cast iron clutch housing)	242	2071.00	0	0
	— RT-8608L (1)	125	1917.00	0	0
56QH00-AA	— RT-8709B (Incl. cast iron clutch housing) (1)				
56P200-AB	10-Speed Direct Fuller	342	2876.00	0	0
	— RT-8908LL (Incl. cast iron clutch housing) (1)				
56AF00-BD	10-Speed Overdrive Fuller	343	3779.00	0	0
56AG00-BB	— RTO-11908LL (H-type shift pattern) (1)				
56KJ00-AT	4-Speed Automatic (Incl. pedestal mtd. shift control, trans. oil cooler, trans. oil high temp. warning light and external oil filter) (N.A. w/Cat. 3126 250/800 HP thru 300 HP eng.) (See Transmission Section of Component Book for max. GVW/GCW)	220	6969.00	0	0
56KK00-AT	Allison				
	— MT-643	312	9620.00	0	0
	5-Speed Automatic (Incl. pedestal mtd. shift control, trans. oil cooler, trans. oil high temp. warning light, external oil filter and rear trans. support) (N.A. w/Cat. 3126 250/800 HP thru 300 HP eng.) (See Transmission Section of Component Book for max. GVW/GCW)				
	Allison				
	— MT-653	63	8175.00	0	0
	5-Speed Electronic (Incl. "Do Not Shift" light, floor mtd. lever type control console & internal oil filter) (Incl. rear trans. supt. w/Cat. 3126 eng. only) (N.A. w/ISC-285 eng. Code 300T00 or 2-Spd. axle ratios) (N.A. w/Airliner or Hendrickson HAS tandem rear susp.) (Req. I/P mtd. shift control w/driver dual armrests Code 25AADJ) (Req. extra cooling Code 37AN00 and Kysor on/off fan clutch Code 373600 when used in comb. w/Cat. 3126 250/800 HP thru 300 HP eng.) (See Transmission Section of Component Book for max. GVW/GCW)				
	Allison				
	— MD3050CR-P (Req. Fire & Emergency application Code AAAX00 when used w/Cat. 3126 275 to 300 HP eng. Codes 30Y400, 30Y500 and 30Y600; and Cum. ISC-285 HP eng. Code 300T00 and 300 HP 300U00)	63	10585.00	0	0
	— MD3550WR-P (Req. Fire & Emergency application Code AAAX00 when used w/Cat. 3126 275 to 300 HP eng. Codes 30Y400, 30Y500 and 30Y600; and Cum. ISC-250, 275 and 285 HP eng. Codes 300R00, 301K00 and 300T00)				

(1) Requires rear trans. supt. Code 57BW00 for on-off hwy. or severe duty applications.

L-LT 8513

60. P
MAR 18 '98 12:52
01 6822 624 205
LNATL KRL YKCNUNEN RF 21:51 86,31 RM
440 269 5957
PAGE. 003

** TOTAL PAGE. 003 **

5-Speed Electronic (Incl. "Do Not Shift" light, floor mtd. lever type control console & internal oil filter) (Incl. rear trans. supt. w/Cat. 3126 eng. only) (Incl. alum. flywheel hsg. w/Cum. ISB eng. w/axle ratios 6.14 or lower) (Incl. ductile iron flywheel hsg. w/axle ratios above 6.14) (N.A. w/Cum. ~~ISC-175 HP eng. Code 300B00, ISC-285 HP eng. Code 300T00~~ or 2-Spd. axle ratios) (N.A. w/Hendrickson HAS tandem rear susp.) (Req. I/P mtd. shift control w/driver dual armrests Code 25AADJ) (Req. extra cooling Code 37AN00 and Kysor on/off fan clutch Code 373600 when used in comb. w/Cat. 3126 250/800 thru 300 HP eng.) (See Transmission Section of Component Info. Data Book for max. GVW/GCW)
Allison

56KJ00-AT

— MD3050CR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cat. ~~ISC-300 HP eng. Code 300U00~~) 30Y400, 30Y500, 30Y600
~~3126-275 to 300 HP~~

56KK00-AT

— MD3550WR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cat. ~~ISC-300 HP eng. Code 300U00~~) 30Y400, 30Y500, 30Y600
~~3126-275 to 300 HP~~

6-Speed Electronic (Incl. "Do Not Shift" light, floor mtd. lever type control console & internal oil filter) (Incl. rear trans. supt. w/Cat. 3126 eng. only) (Incl. alum. flywheel hsg. w/Cum. ISB eng. w/axle ratios 5.38 or lower) (Incl. ductile iron flywheel hsg. w/axle ratios above 5.38) (N.A. w/Cum. ~~ISC-175 HP eng. Code 300B00, ISC-285 HP eng. Code 300T00~~ or 2-Spd. axle ratios) (N.A. w/Hendrickson HAS tandem rear susp.) (Req. I/P mtd. shift control w/driver dual armrests Code 25AADJ) (Req. extra cooling Code 37AN00 and Kysor on/off fan clutch Code 373600 when used in comb. w/Cat. 3126 250/800 thru 300 HP eng.) (See Transmission Section of Component Info. Data Book for max. GVW/GCW)
Allison

56H400-AV

— MD3060CR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cum. ~~ISC-300 HP eng. Code 300U00~~) SAME AS 56KJ00

56H500-AT

— MD3560WR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cum. ~~ISC-300 HP eng. Code 300U00~~) SAME AS 56KK00

56QC00-AA

— MD3066

OR
AIRLINER
TRAN

OR
AIRLINER
TRAN

(3126 RESTRICTIONS)

TMH 1/27/98

L-LT8513

Change made
to 51AT7501
51AT8511
51AT8513
in SPEC
3-17-98

56KJ00-AT

56KK00-AT

ALSO NAW
300HP
(300U00)

56H400-AV

56H500-AT

56QC00-AA

5-Speed Electronic (Incl. "Do No. Shift" light, floor mtd. lever type control console & internal oil filter) (Incl. rear trans. supt. w/Cat. 3126 eng. only) (Incl. alum. flywheel hsg. w/Cum. ISB eng. w/axle ratios 6.14 or lower) (Incl. ductile iron flywheel hsg. w/axle ratios above 6.14) (N.A. w/Cum. ISB-175 HP eng. Code 300B00, ~~ISC-285 HP eng. Code 300T00~~ or 2-Spd. axle ratios) (N.A. w/Hendrickson HAS tandem rear susp.) (Req. I/P mtd. shift control w/driver dual armrests Code 25AADJ) (Req. extra cooling Code 37AN00 and Kysor on/off fan clutch Code 373600 when used in comb. w/Cat. 3126 250/800 thru 300 HP eng.) (See Transmission Section of Component Info. Data Book for max. GVW/GCW)
Allison

— MD3050CR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cum. ISC-300 HP eng. Code 300U00) AND ~~ISC 285HP 300T00~~

— MD3550WR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cum. ISC-~~300 HP~~ ^{285 HP} eng. Code ~~300U00~~ ^{300T00} AND ~~ISC 275HP 301K00~~ ^{300R00} & 250HP 300R00 (NOT 300S00))

6-Speed Electronic (Incl. "Do Not Shift" light, floor mtd. lever type control console & internal oil filter) (Incl. rear trans. supt. w/Cat. 3126 eng. only) (Incl. alum. flywheel hsg. w/Cum. ISB eng. w/axle ratios 5.38 or lower) (Incl. ductile iron flywheel hsg. w/axle ratios above 5.38) (N.A. w/Cum. ISB-175 HP eng. Code 300B00, ~~ISC-285 HP eng. Code 300T00~~ or 2-Spd. axle ratios) (N.A. w/Hendrickson HAS tandem rear susp.) (Req. I/P mtd. shift control w/driver dual armrests Code 25AADJ) (Req. extra cooling Code 37AN00 and Kysor on/off fan clutch Code 373600 when used in comb. w/Cat. 3126 250/800 thru 300 HP eng.) (See Transmission Section of Component Info. Data Book for max. GVW/GCW)
Allison

— MD3060CR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cum. ISC-300 HP eng. Code 300U00) AND ~~ISC 285HP 300T00~~

— MD3560WR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cum. ISC-~~300 HP~~ ²⁸⁵ eng. Code ~~300U00~~ ^{300T00} AND ~~ISC 275HP 301K00~~ ^{300R00} AND 250HP 300R00 (NOT 300S00))

— MD3066 AND 250HP 300R00

on
AIRLINE
TAND

PER
HAHN
4-22-98
(NOT 300S00)
IT IS
GOOD

on
AIRLINE
TAND

PER
HAHN
4-22-98

(NOT 300S00)
IT IS
GOOD

(ISC RESTRICTIONS)

KELLY,
YES, IT SHOULD BE IN THE
DATA BOOK. John H. Bonaker 8603/6 TWH 1/17/

300R00 IS A SMOKE PROBLEM
NOT TORQUE

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	56 — TRANSMISSIONS (Continued)				
	6-Speed Electronic (Incl. "Do Not Shift" light, floor mtd. lever type control console & internal oil filter) (Incl. rear trans. supt. w/Cat. 3126 eng. only) (N.A. w/2-Spd. axle ratios) (N.A. w/Airliner or Hendrickson HAS tandem rear susp.) (Req. I/P mtd. shift control w/driver dual armrests Code 25AADJ) (Req. extra cooling Code 37AN00 and Kysor on/off fan clutch Code 373600 when used in comb. w/Cat. 3126 250/800 HP thru 300 HP eng.) (See Transmission Section of Component Book for max. GVW/GCW)				
56H400-AV	Allison — MD3060CR-P (Req. Fire & Emergency application Code AAAX00 when used w/Cat. 3126 275 to 300 HP eng. Codes 30Y400, 30Y500 and 30Y600; and Cum. ISC-285 HP eng. Code 300T00 and 300 HP 300U00).....	63	8572.00	0	0
56H500-AT	— MD3560WR-P (Req. Fire & Emergency application Code AAAX00 when used w/Cat. 3126 275 to 300 HP eng. Codes 30Y400, 30Y500 and 30Y600; and Cum. ISC-250, 275 and 285 HP eng. Codes 300R00, 301K00 and 300T00).....	63	10939.00	0	0
56QC00-AA	— MD3066	63	11619.00	0	0
	57 — TRANSMISSION EQUIPMENT				
57C400-AA	Control Console, Push Button (For Allison MD electronic trans. only) — Instrument Panel Mounted	1	11.00	0	0
57CD00-AR	— Pedestal Mounted (N.A. w/driver swivel seat Code 25AAD0)	0	11.00	0	0
57CE00-AP	ECU, Maximum Feature (Pumper) in lieu of included ECU (For Allison MD electronic trans. only) (Avail. for Fire Truck Pumper applications only) (Refer to Component Info. Data Book for complete details)	2	323.00	0	0
57BW00-AC	Support, Rear Transmission (Avail. for on-hwy. applications w/RT-8908LL or RTO-11908LL trans.; Also avail. w/Cat. 3126 only for on-hwy. applications w/RT-8608L or RT-8709B trans.)	8	60.00	0	0
57BC00-AA	Synthetic Lube — Mobil 50W Transmission, Manual	0	127.00	0	0
	59 — CHASSIS EQUIPMENT				
59F700-AD	Bumper, Front — Aluminum. Anodized, Full Width	-48	171.00	0	0
59AL00-AP	— Swept-Back				
	— Steel, Cut-Off, Painted Med. Titanium (N.A. w/auxiliary lights Codes 27G700 or 27G800).....	-39	CR 36.00	0	0
59G600-AA	— Steel, Full Width	3	365.00	0	0
59F600	— Swept-Back, Chrome Plated			S	S
59HC00-AA	— Swept-Back, Painted Med. Titanium (Standard)	—	—		
	Bumper Extension, Front — 12" Spacer (Incl. radiator mounted (fixed) grille) (N.A. w/extended frame, front tow hooks Code 59AB00, driving lights Code 27G800 or fog lights Code 27G700) (Max. 900 sq. in. cooling module) (N.A. as 244" wb tandem axle tractor)	N/A	83.00	0	0
59AB00-BL	Tow Hooks, Front (N.A. w/extended bumper)	27	103.00	0	0
59AC00-AX	Tow Hooks, Rear (Incl. square cut rear frame ends Code 40EN00) (Avail. w/truck only) (N.A. w/outside frame rail mtd. taillights Code 275600) (Req. min. 58" AF w/mud flaps and single rear axle; Req. min. 63" AF w/52" HAS and 51" A/L tandem susp.; Req. min. 75" AF w/60" HAS, 55" and 59" A/L tandem susp. or w/mud flaps on HAS, A/L, HFS and Neway tandem susp.; Req. min. 90" AF w/mud flaps in comb. w/walking beam tandem susp.)	27	103.00	0	0
59AE00-AX	Tow Hooks, Front & Rear (Incl. square cut rear frame ends Code 40EN00) (Avail. w/truck only) (N.A. w/outside frame rail mtd. taillights Code 275600 or extended bumper Code 59HC00) (Req. min. 58" AF w/mud flaps and single rear axle; Req. min. 63" AF w/52" HAS and 51" A/L tandem susp.; Req. min. 75" AF w/60" HAS, 55" and 59" A/L tandem susp. or w/mud flaps on HAS, A/L, HFS and Neway tandem susp.; Req. min. 90" AF w/mudflaps in comb. w/walking beam tandem susp.)	55	207.00	0	0

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	60 — EQUIPMENT OPTIONS				
	Fifth Wheels — Avail. w/ tractor package only. — Avail. w/ 10.76, 13.3 or 15.9 SM frames only. — N.A. w/ 148" wb w/ forward mounted 100 gal. L.H., R.H. or dual cyl. fuel tanks & aft of cab battery w/ taper-leaf or multi-leaf single rear susp. — N.A. w/ 148" wb w/ forward mounted 100 gal. L.H., R.H. or dual cyl. fuel tanks & aft of cab battery w/ any HAS single rear susp. — N.A. w/ Neway AD-123 Single Axle air suspension. — Includes outboard mounted angle brackets. — Painted Black only. — L.H. release. — DSO offsets avail. for both stationary and sliding fifth wheels. Additional Restrictions: (Apply only to Fontaine sliders, 36.7" Holland sliders and 24.5" Holland 6.62" height sliders) — w/ Forward mounted fuel tank and aft of cab battery w/ single rear axle — N.A. w/ 148" wb w/ any 80 gal. or 100 gal. L.H., R.H. or dual rect. fuel tanks — N.A. w/ 160" wb w/ 120 gal. cyl. fuel tanks — w/ Forward mounted fuel tank and aft of cab battery w/ tandem Rear Axle — N.A. w/ 148" wb w/ 70 gal. L.H. or dual cyl. fuel tanks w/ HFS or 52" HAS tandem suspensions. — N.A. w/ 148"-172" wb w/ 100 gal. L.H. or dual cyl. fuel tanks w/ 60" HAS tandem suspensions. Air Slide Fifth Wheels (Incl. in-cab control) (N.A. w/ tandem axle when differential main lockout Code 13AW00 is used in comb. w/ air susp. dump valve Code 48AC00) — Fontaine Standard Duty, 24" Air Slide (On-hwy. only) 60CP00-AA — 6.75" Height 536 1715.00 0 0 60CR00-AA — 7.75" Height 542 1715.00 0 0 60CT00-AA — 8.75" Height 548 1759.00 0 0 — Fontaine Heavy Duty, 24" Air Slide 60WL00-AA — 6.75" Height 536 1828.00 0 0 60WM00-AA — 7.75" Height 542 1828.00 0 0 60WN00-AA — 8.75" Height 548 1872.00 0 0 — Holland 3500, 24.5" Air Slide 60AGM0-AA — 6.62" Height (N.A. w/ 54" Neway tandem susp.) 529 1823.00 0 0 60AGN0-AA — 7.62" Height 479 1823.00 0 0 60AGP0-AA — 8.62" Height 484 1867.00 0 0 — Holland 3500, 36.75" Air Slide (N.A. w/ Neway tandem susp.) 60AGW0-AA — 7.62" Height 588 1823.00 0 0 60AGX0-AA — 8.62" Height 593 1867.00 0 0 — Holland Fleetmaster, 24.5" Air Slide (On-hwy. only) 60ST00-AA — 6.62" Height (N.A. w/ 54" Neway tandem susp.) 529 1823.00 0 0 60PQ00-AA — 7.62" Height 479 1823.00 0 0 60AGT0-AA — 8.62" Height 484 1867.00 0 0 — Holland Fleetmaster, 36.75" Air Slide (On-hwy. only) (N.A. w/ Neway tandem susp.) 60AGU0-AA — 7.62" Height 512 1823.00 0 0 60AGV0-AA — 8.62" Height 517 1867.00 0 0				

L / LT8513 — 113" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	60 — EQUIPMENT OPTIONS (Continued)				
	Fifth Wheels (Continued)				
	Manual Slide Fifth Wheels				
	— Fontaine Standard Duty, 24" Manual Slide (<i>On-hwy. only</i>)				
60AGY0-AA	— 6.75" Height	532	1644.00	0	0
60CX00-AA	— 7.75" Height	538	1644.00	0	0
60CY00-AA	— 8.75" Height	544	1687.00	0	0
	— Holland 3500, 24.5" Manual Slide				
60AG20-AA	— 6.62" Height (<i>N.A. w/54" Neway tandem susp.</i>)	521	1781.00	0	0
60AG30-AA	— 7.62" Height	483	1781.00	0	0
60AG40-AA	— 8.62" Height	488	1827.00	0	0
	— Holland Fleetmaster, 24.5" Manual Slide (<i>On-hwy. only</i>)				
60FU00-AA	— 6.62" Height (<i>N.A. w/54" Neway tandem susp.</i>)	521	1781.00	0	0
609Q00-AA	— 7.62" Height	483	1781.00	0	0
60AG10-AA	— 8.62" Height	488	1827.00	0	0
	Stationary Fifth Wheels				
	— Stationary Fifth Wheel offsets are 6" ahead of Rear Axle centerline.				
	— Holland 3500, Stationary				
60AGJ0-AA	— 6.62" Height	368	1213.00	0	0
60AGK0-AA	— 7.62" Height	373	1213.00	0	0
60AGL0-AA	— 8.62" Height	378	1263.00	0	0
	— Holland Fleetmaster, Stationary (<i>On-hwy. only</i>)				
60AGQ0-AA	— 6.62" Height	304	1213.00	0	0
60AGR0-AA	— 7.62" Height	310	1213.00	0	0
60AGS0-AA	— 8.62" Height	308	1263.00	0	0
60AHM0-AA	Mud Flaps, Front (<i>Recommended w/forward mtd. alum. cyl. fuel tanks</i>)	5	63.00	0	0
	Mud Flaps, Rear (<i>Req. min. 75" AF w/rear tow hook Code 59AC00</i>)				
	Fleetliner, Black Rubber (<i>Incl. tapered brackets</i>)				
60AAM0-AE	— Avail. w/truck only	36	215.00	0	0
60AAM0-AF	— Avail. w/tractor only	18	133.00	0	0
	Fleetliner, White Rubber (<i>Incl. stainless brackets</i>)				
60AAN0-AE	— Avail. w/truck only	28	295.00	0	0
60AAN0-AF	— Avail. w/tractor only	10	213.00	0	0
	Quarter Fenders (<i>Avail. for tractor only</i>) (<i>N.A. w/148" wb. in comb. w/tandem axle</i>) (<i>See Quarter Fender Restriction Charts in the Appendix at the end of this model</i> <i>for additional wheelbase restrictions</i>)				
60AAK0-AA	Fleetliner, Black Ultra Rubber	24	196.00	0	0
60AAL0-AA	Fleetliner, Stainless Steel	32	295.00	0	0
	62 — MISCELLANEOUS OPTIONS				
62AF00-BT	Puerto Rico Delivery (<i>Avail. for export only</i>)	0	NC	0	0

113" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT8513 Mid-Range Diesel (4x2 & 6x4)
FORWARD MTD. FUEL TANK

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX
					LH (29KE00) Standard Weight (29KD00) Light Weight	RH (29LG00 Standard Weight (29LJ00) Light Weight	LH (29KF00)
SHALLOW RECTANGULAR							
45 gal. (Clean CA)	RH LH	43PA00 43N900	N/A	N/A	Not Available w/LH fuel tanks Req. min. 160" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH fuel tanks Req. min. 160" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available
55 gal.	RH LH Dual	43L700 43L800 43L900	N/A	N/A	Not Available w/LH or dual fuel tanks Req. min. 160" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 160" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Req. min. 160" wb w/ walking beam or 60" HAS and 51" Airliner tandem susp. Req. min. 172" wb w/Neway tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.
80 gal.	RH LH Dual	43MB00 43MA00 43MC00	N/A	N/A	Not Available w/LH or dual fuel tanks Req. min. 160" wb w/60" Neway tandem susp. Req. min. 172" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 160" wb w/60" Neway tandem susp. Req. min. 172" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Req. min. 172" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.
DEEP RECTANGULAR							
60 gal. Clean CA	RH LH	43PE00 43PD00	N/A	N/A	Not Available w/LH fuel tanks Req. min. 160" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH fuel tanks Req. min. 160" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available Req. min. 160" wb w/ walking beam or 60" HAS and 51" Airliner tandem susp.
75 gal.	RH LH Dual	43M100 43M000 43M200	N/A	N/A	Not Available w/LH or dual fuel tanks Req. min. 160" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 160" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Req. min. 172" wb w/Neway tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.
100 gal.	RH LH Dual	43M400 43N000 43M500	N/A	N/A	Not Available w/LH or dual fuel tanks Req. min. 160" wb w/Neway tandem susp. Req. min. 172" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 160" wb w/Neway tandem susp. Req. min. 172" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Req. min. 196" wb w/walking beam, HFS or HAS and 51" Airliner tandem susp. Req. min. 208" wb w/Neway and Airliner 55" and 59" tandem susp.

113" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT8513 Mid-Range Diesel (4x2 & 6x4)
FORWARD MTD. FUEL TANK

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX
					LH (29KE00) Standard Weight (29KD00) Light Weight	RH (29LG00 Standard Weight (29LJ00) Light Weight	LH (29KF00)
CYLINDRICAL TANKS							
50 gal. (Clean CA)	RH LH	43PC00 43PB00	N/A	N/A	Not Available w/LH fuel tanks Req. min. 160" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH fuel tanks Req. min. 160" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available
70 gal.	RH LH Dual	43MF00 43MG00 43MH00	43MM00 43MN00 43MP00	43NN00 43NM00 43NP00	Not Available w/LH or dual fuel tanks Req. min. 160" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 160" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Req. min. 160" wb w/ walking beam or 60" HAS and 51" Airliner tandem susp. Req. min. 172" wb w/Neway tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.
100 gal.	RH LH Dual	43MJ00 43LD00 43MK00	43FT00 43D200 43MR00	43NT00 43NR00 43NV00	Not Available w/LH or dual fuel tanks Req. min. 160" wb w/all walking beam, 60" HAS or all Neway tandem susp. Req. min. 172" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 160" wb w/all walking beam, 60" HAS or all Neway tandem susp. Req. min. 172" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Req. min. 172" wb w/walking beam, HFS or HAS and 51" Airliner tandem susp. Req. min. 184" wb w/54" Neway or 55" A/L tandem susp. Req. min. 190" wb w/60" Neway or 59" A/L tandem susp.
120 gal.	Dual	43GW00	43A000	43CR00	Not Available	Not Available	Req. min. 160" wb w/single rear axle Req. min. 184" wb w/walking beam, HFS, HAS Neway and 51" Airliner tandem susp. Req. min. 196" wb w/Neway and Airliner 55" and 59" tandem susp.

113" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT8513 Mid-Range Diesel (4x2 & 6x4)
LH TANK REAR - RH TANK FORWARD MTD.

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX
					LH (29KE00 Standard Weight (29KD00) Light Weight	RH (29LG00 Standard Weight (29LJ00) Light Weight	LH (29KF00)
SHALLOW MIXED RECTANGULAR							
30 gal. LH, 55 gal. RH	Mixed	43MD00	N/A	N/A	Req. min. 160" wb w/51 Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
55 gal. LH, 80 gal. RH	Mixed	43ME00	N/A	N/A	Req. min. 160" wb w/Neway, Walking beam, HAS, HFS tandem susp. Req. min. 172" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
DEEP MIXED RECTANGULAR							
50 gal. LH, 75 gal. RH	Mixed	43M600	N/A	N/A	Req. min. 160" wb w/51 Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available Not Available	Not Available Not Available
75 gal. LH, 100 gal. RH	Mixed	43M700	N/A	N/A	Req. min. 160" wb w/Neway, Walking beam, HAS, HFS tandem susp. Req. min. 172" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.		
MIXED CYLINDRICAL							
70 gal. LH, 100 gal. RH	Mixed	43ML00	43MT00	43NW00	Req. min. 160" wb w/walking beam, 60" HAS or Neway tandem susp. Req. min. 172" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available

113" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT8513 Mid-Range Diesel (4x2 & 6x4)
REAR MTD. FUEL TANK

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX
					LH (29KE00 Standard Weight (29KD00) Light Weight	RH (29LG00 Standard Weight (29LJ00) Light Weight	LH (29KF00)
SHALLOW RECTANGULAR							
55 gal.	RH LH Dual	43L700 43L800 43L900	N/A	N/A	Req. min. 160" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
80 gal.	RH LH Dual	43MB00 43MA00 43MC00	N/A	N/A	Req. min. 172" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
DEEP RECTANGULAR							
50 gal.	RH LH Dual	43MX00 43MW00 43MY00	N/A	N/A	Req. min. 160" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
75 gal.	RH LH Dual	43MT00 43M000 43M200	N/A	N/A	Req. min. 160" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
100 gal.	RH LH Dual	43M400 43N000 43M500	N/A	N/A	Req. min. 172" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 184" wb w/60" Neway 55" and 59" Airliner tandem susp.	Not Available	
CYLINDRICAL TANK							
70 gal.	RH LH Dual	43MF00 43MG00 43MH00	43MM00 43MN00 43MP00	43NN00 43NM00 43NP00	Req. min. 160" wb w/54" or 60" walking beam, 60" HAS or 54" or 60" Neway and 51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
100 gal.	RH LH Dual	43MJ00 43LD00 43MK00	43FT00 43D200 43MR00	43NT00 43NR00 43NV00	Req. min. 172" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
120 gal.	Dual	43GW00	43A000	43CR00	Req. min. 160" wb w/46" or 52" ML or TL or w/Neway and Airliner single rear susp. Req. min. 184" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 190" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available

113" BBC
EXHAUST RESTRICTIONS
L/LT8513 Mid-Range Diesel (4x2 & 6x4)
FORWARD MTD. FUEL TANKS

The chart below indicates exhaust restrictions by engine. Combination is not restricted unless indicated.

EXHAUST	CUMMINS ISC	CATERPILLAR 3126
Single Horizontal RH Muffler & Pipe 32FD00 (Standard)	Req. min. 160" wb w/tandem susp.	Req. min. 160" wb w/tandem susp.
Single Horizontal RH Muffler & Vertical Outlet (cab mtd.) (over frame) 32FE00, 32FG00	Req. min. 160" wb w/tandem susp.	Req. min. 160" wb w/tandem susp.
Single Horizontal RH Muffler & Vertical Outlet (cab mtd.) (under frame) 32FF00, 32FH00 N.A. w/RH or dual/mixed fuel tanks.	Req. min. 160" wb w/tandem susp.	Req. min. 160" wb w/tandem susp.
Single Horizontal RH Muffler & Vertical Outlet (frame mtd.) (over frame) 32FJ00, 32FL00 N.A. w/any 75 gal. fuel tank, mixed 50/75, 30/55 or 55/80 gal. fuel tanks	Req. min. 160" wb w/tandem susp.	Req. min. 160" wb w/tandem susp.
Single Horizontal RH Muffler & Vertical Outlet (frame mtd.) (under frame) 32FK00, 32FM00 N.A. w/any 75 gal. fuel tank; N.A. w/RH or dual/mixed fuel tanks.	Req. min. 160" wb w/tandem susp.	Req. min. 160" wb w/tandem susp.
Single Vertical Muffler & Vertical Outlet (cab mtd.) 32FW00, 32FX00 N.A. w/RH clean CA fuel tanks.	Not Restricted to engines	Not Restricted to engines
Single Vertical Muffler & Vertical Outlet (frame mtd.) 32FY00, 32F000 N.A. w/75 gal. fuel tank, mixed 30/55, 55/80 or 50/75 gal. fuel tanks; N.A. w/55 gal. tanks; N.A. w/N.A. w/80 gal. RH or dual fuel tanks; N.A. w/RH clean CA fuel tanks.	Not Restricted to engines	Not Restricted to engines
Single Transverse RH Muffler Horizontal Outlet (under frame) 32FN00 N.A. w/RH or dual/mixed fuel tanks.	Req. min. 172" wb w/tandem susp.	Req. min. 172" wb w/tandem susp.
Single Transverse RH Muffler Vertical Outlet (cab mtd.) 32FP00, 32FR00 N.A. w/RH or dual/mixed fuel tanks.	Not Restricted to engines Req. min. 160" wb w/tandem susp.	Not Restricted to engines Req. min. 160" wb w/tandem susp.

113" BBC
EXHAUST RESTRICTIONS
L/LT8513 Mid-Range Diesel (4x2 & 6x4)
REAR MTD. FUEL TANKS

The chart below indicates exhaust restrictions by engine. Combination is not restricted unless indicated.

EXHAUST	CUMMINS ISC	CATERPILLAR 3126
Single Horizontal Muffler & Pipe 32FD00 (Standard)	Req. min. 160" wb w/tandem susp.	Req. min. 160" wb w/tandem susp.
Single Horizontal Muffler & Vertical Outlet (cab mtd.) (over frame) 32FE00, 32FG00	Req. min. 160" wb w/tandem susp.	Req. min. 160" wb w/tandem susp.
Single Horizontal Muffler & Vertical Outlet (cab mtd.) (under frame) 32FF00, 32FH00 N.A. w/RH or dual/mixed fuel tanks	Req. min. 160" wb w/tandem susp.	Req. min. 160" wb w/tandem susp.
Single Horizontal Muffler & Vertical Outlet (frame mtd.) (over frame) 32FJ00, 32FL00 N.A. w/any 50 gal.rect. fuel tank; N.A. w/mixed 50/75, 30/55 or 55/80 gal. fuel tanks	Req. min. 160" wb w/tandem susp.	Req. min. 160" wb w/tandem susp.
Single Horizontal Muffler & Vertical Outlet (frame mtd.) (under frame) 32FK00, 32FM00 N.A. w/any 50 gal. rect. fuel tank; N.A. w/ any RH or dual/mixed fuel tanks	Req. min. 160" wb w/tandem susp.	Req. min. 160" wb w/tandem susp.
Single Vertical Muffler & Vertical Outlet (cab mtd.) 32FW00, 32FX00	Not Restricted to engines	Not Restricted to engines
Single Vertical Muffler & Vertical Outlet (frame mtd.) 32FY00, 32F000 N.A. w/50 gal.rect. fuel tank; N.A. w/55 Shallow RH or dual rectangular tanks; N.A. w/mixed 30/55, 55/80 or 50/75 gal. fuel tanks;	Not Restricted to engines	Not Restricted to engines
Single Transverse Muffler Horizontal Outlet (under frame) 32FN00 N.A. w/RH or dual/mixed fuel tanks	Req. min. 172" wb w/tandem susp.	Req. min. 172" wb w/tandem susp.
Single Transverse Muffler Vertical Outlet (cab mtd.) 32FP00, 32FR00 N.A. w/RH or dual/mixed fuel tanks	Req. min. 160" wb w/tandem susp.	Req. min. 160" wb w/tandem susp.

113" BBC
QUARTER FENDER* RESTRICTIONS
 (Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/LT8513 Mid-Range Diesel (4x2 & 6x4)
FORWARD MTD. FUEL TANKS

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
SHALLOW RECTANGULAR							
55 gal.	RH LH Dual	43L700 43L800 43L900	N/A	N/A	Req. min. 160" wb w/ 60" walking beam, 60" HAS tandem, 60" Neway or 51" Airliner tandem susp. Req. min. 172" wb w/55" and 59" Airliner tandem susp.	Req. min. 160" wb w/ 60" walking beam, 60" HAS tandem, 60" Neway or 51" Airliner tandem susp. Req. min. 172" wb w/55" and 59" Airliner tandem susp.	Req. min. 160" wb w/ 60" walking beam, 60" HAS or 51" Airliner tandem susp. Req. min. 172" wb w/60" Neway or Airliner 55" and 59" tandem susp.
80 gal.	RH LH Dual	43MB00 43MA00 43MC00	N/A	N/A	Req. min. 172" wb w/ 60" walking beam, 60" HAS tandem, 60" Neway or 51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Req. min. 172" wb w/ 60" walking beam, 60" HAS tandem, 60" Neway or 51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Req. min. 172" wb w/ 60" walking beam, 60" HAS or 51" Airliner tandem susp. w/ under cab or aft-of-cab battery box Req. min. 184" wb w/60" Neway or Airliner 55" and 59" tandem susp. w/ under cab or aft-of-cab battery box
DEEP RECTANGULAR							
75 gal.	RH LH Dual	43M100 43M000 43M200	N/A	N/A	Req. min. 160" wb w/ 60" walking beam, 60" HAS or 51" Airliner tandem susp. Req. 172" min. wb w/60" Neway or Airliner 55" and 59" tandem susp.	Req. min. 160" wb w/ 60" walking beam, 60" HAS or 51" Airliner tandem susp. Req. 172" min. wb w/60" Neway or Airliner 55" and 59" tandem susp.	Req. min. 172" wb w/ 60" walking beam, 60" HAS or 51" Airliner tandem susp. w/ under cab or aft-of-cab battery box Req. min. 172" wb w/60" Neway or Airliner 55" and 59" tandem susp.
100 gal.	RH LH Dual	43M400 43N000 43M500	N/A	N/A	Req. min. 172" wb w/ 60" walking beam, 60" HAS tandem, 60" Neway or 51" Airliner tandem susp. Req. min. 196" wb w/55" and 59" Airliner tandem susp.	Req. min. 172" wb w/ 60" walking beam, 60" HAS tandem, 60" Neway or 51" Airliner tandem susp. Req. min. 196" wb w/55" and 59" Airliner tandem susp.	Req. min. 172" wb w/ 60" walking beam, 60" HAS or 51" Airliner tandem susp. w/ under cab or aft-of-cab battery box Req. min. 184" wb w/60" Neway or Airliner 55" and 59" tandem susp. w/under cab or aft-of-cab battery box
CYLINDRICAL TANKS							
70 gal.	RH LH Dual	43MF00 43MG00 43MH00	43MM00 43MN00 43MP00	43NN00 43NM00 43NP00	Req. min. 160" wb w/51" Airliner tandem susp. Req. min. 172" wb w/ 60" walking beam or 60" HAS tandem susp. Req. min. 184" wb w/60" Neway or Airliner 55" and 59" tandem susp.	Req. min. 172" wb w/ 60" walking beam, 60" HAS or 51" Airliner tandem susp. Req. 184" min. wb w/60" Neway or Airliner 55" and 59" tandem susp.	Req. min. 172" wb w/ 60" walking beam, 60" HAS or 51" Airliner tandem susp. Req. min. 184" wb w/ 60" Neway or Airliner 55" and 59" tandem susp.
100 gal.	RH LH Dual	43MJ00 43LD00 43MK00	43FT00 43D200 43MR00	43NT00 43NR00 43NV00	Req. min. 160" wb w/51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.	Req. min. 184" wb w/HAS, HFS, walking beam, 54" Neway or 51" Airliner tandem susp. Req. Min. 196" wb w/ 60" Neway or Airliner 55" and 59" tandem susp.	Req. min. 184" wb w/HAS, HFS, walking beam, 54" Neway or 51" Airliner tandem susp. Req. Min. 196" wb w/ 60" Neway or Airliner 55" and 59" tandem susp.
120 gal.	Dual	43GW00	43A000	43CR00	Not Available	Req. min. 184" wb w/ single rear axle Req. min. 208" wb w/ HAS, HFS, walking beam, 54" Neway or 51" Airliner tandem susp. Req. min. 220" wb w/60" Neway or Airliner 55" and 59" tandem susp.	Req. min. 184" wb w/ single rear axle Req. min. 208" wb w/ HAS, HFS, walking beam, 54" Neway or 51" Airliner tandem susp. Req. min. 220" wb w/60" Neway or Airliner 55" and 59" tandem susp.

* Avail. w/Tractor only; N.A. w/148" wb w/tandem axle

113" BBC
QUARTER FENDER* RESTRICTIONS
(Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/LT8513 Mid-Range Diesel (4x2 & 6x4)
LH TANK REAR - RH TANK FORWARD MTD.

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
SHALLOW MIXED RECTANGULAR							
30 gal. LH, 55 gal. RH	Mixed	43MD00	N/A	N/A	Req. min. 160" wb w/60" walking beam or 60" HAS tandem susp. Req. min. 172" wb w/60" Neway or Airliner tandem susp.	Not Available	Req. min. 160" wb w/60" walking Beam or 60" HAS tandem susp. Req. min. 172" wb w/60" Neway or Airliner tandem susp.
55 gal. LH, 80 gal. RH	Mixed	43ME00	N/A	N/A	Req. min. 172" wb w/60" tandem susp. Req. min. 184" wb w/Airliner tandem susp.	Not Available	Req. min. 172" wb w/60" walking beam or 60" HAS tandem susp. w/under cab or aft of cab battery box Req. min. 184" wb w/60" Neway or Airliner tandem susp. w/under cab or aft of cab battery box
DEEP MIXED RECTANGULAR							
50 gal. LH, 75 gal. RH	Mixed	43M600	N/A	N/A	Req. min. 160" wb w/60" walking beam or 60" HAS tandem susp. Req. min. 172" wb w/60" Neway or Airliner tandem susp.	Not Available	Req. min. 172" wb w/60" walking beam or 60" HAS tandem susp. w/under cab or aft of cab battery box Req. min. 184" wb w/60" Neway or Airliner tandem susp. w/under cab or aft of cab battery box
75 gal. LH, 100 gal. RH	Mixed	43M700	N/A	N/A	Req. min. 172" wb w/60" tandem susp. Req. min. 184" wb w/Airliner tandem susp.	Not Available	Req. min. 172" wb w/60" walking beam or 60" HAS tandem susp. w/under cab or aft of cab battery box Req. min. 184" wb w/60" Neway or Airliner tandem susp. w/under cab or aft of cab battery box
MIXED CYLINDRICAL							
70 gal. LH, 100 gal. RH	Mixed	43ML00	43MT00	43NW00	Req. min. 172" wb w/ 60" tandem susp. Req. min. 184" wb w/Airliner tandem susp.	Not Available	Req. min. 172" wb w/60" walking beam, 60" HAS or 60" Neway tandem susp. Req. min. 184" wb w/Airliner tandem susp.

* Avail. w/Tractor only; N.A. w/148" wb w/tandem axle

113" BBC
QUARTER FENDER* RESTRICTIONS
(Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/ LT8513 Mid-Range Diesel (4x2 & 6x4)
REAR MTD. FUEL TANKS

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
SHALLOW RECTANGULAR							
55 gal.	RH LH Dual	43L700 43L800 43L900	N/A	N/A	Req. min. 160" wb w/ 60" walking beam, 60" HAS or 51" Airliner tandem susp. Req. min. 172" wb w/60" Neway or Airliner 55" and 59" tandem susp.	Not Available	Req. min. 172" wb w/ 60" walking beam, 60" HAS tandem, 60" Neway or 51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.
80 gal.	RH LH Dual	43MB00 43MA00 43MC00	N/A	N/A	Req. min. 172" wb w/ 52" or 54" walking beam, HAS, HFS, Neway or 51" Airliner tandem susp. Req. min. 184" wb w/60" walking beam, 60" HAS or Airliner 55" and 59" tandem tandem susp. Req. min. 196" wb w/ 60" Neway tandem susp.	Not Available	Req. min. 172" wb w/ 60" walking beam, 60" HAS tandem, 60" Neway or 51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.
DEEP RECTANGULAR							
50 gal.	RH LH Dual	43MX00 43MW00 43MY00	N/A	N/A	Req. min. 160" wb w/ 60" walking beam, 60" HAS tandem, 60" Neway or 51" Airliner tandem susp. Req. min. 172" wb w/55" and 59" Airliner tandem susp.	Not Available	Req. min. 172" wb w/ 60" walking beam, 60" HAS or 51" Airliner tandem susp. w/ LH or dual fuel tanks Req. min. 160" wb w/60" walking beam, 60" HAS or 51" Airliner tandem susp. w/RH fuel tanks Req. min. 172" wb w/60" Neway or Airliner 55" and 59" tandem susp.
75 gal.	RH LH Dual	43M100 43M000 43M200	N/A	N/A	Req. min. 160" wb w/ 60" walking beam, 60" HAS tandem, 60" Neway or 51" Airliner tandem susp. Req. min. 172" wb w/55" and 59" Airliner tandem susp.		
100 gal.	RH LH Dual	43M400 43N000 43M500	N/A	N/A	Req. min. 172" wb w/ 52" or 54" walking beam, HAS, HFS, Neway or 51" Airliner tandem susp. Req. min. 184" wb w/60" walking beam or 60" HAS or Airliner 55" and 59" tandem susp. Req. min. 196" wb w/ 60" Neway tandem susp.	Not Available	Req. min. 172" wb w/ 60" walking beam, 60" HAS tandem, 60" Neway or 51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.
CYLINDRICAL TANKS							
70 gal.	RH LH Dual	43MF00 43MG00 43MH00	43MM00 43MN00 43MP00	43NN00 43NM00 43NP00	Req. min. 172" wb w/ 60" walking beam, 60" HAS tandem, 60" Neway or 51" Airliner tandem susp. Req. min. 172" wb w/55" and 59" Airliner tandem susp.	Not Available	Req. min. 172" wb w/ 60" walking beam, 60" HAS tandem, 60" Neway or 51" Airliner tandem susp. Req. min. 184" wb w/55" and 59" Airliner tandem susp.
100 gal.	RH LH Dual	43MJ00 43LD00 43MK00	43FT00 43D200 43MR00	43NT00 43NR00 43NV00	Req. min. 172" wb w/ 52" or 54" walking beam, HAS, HFS or Neway tandem susp. Req. min. 184" wb w/60" walking beam, 60" HAS or 51" Airliner tandem susp. Req. min. 196" wb w/ 60" Neway or Airliner 55" and 59" tandem susp.	Not Available	Req. min. 172" wb w/ 52" or 54" walking beam, HAS, HFS or Neway tandem susp. Req. min. 184" wb w/60" walking beam, 60" HAS or 51" Airliner tandem susp. Req. min. 196" wb w/ 60" Neway or Airliner 55" and 59" tandem susp.
120 gal.	Dual	43GW00	43A000	43CR00	Req. min. 160" wb w/single rear axle Req. min. 184" wb w/ 52" & 54" tandem axle susp. Req. min. 196" wb w/ 60" walking beam, 60" HAS or 51" Airliner tandem susp. Req. min. 208" wb w/60" Neway or Airliner 55" and 59" tandem susp.	Not Available	Req. min. 160" wb w/single rear axle Req. min. 184" wb w/ 52" & 54" tandem axle susp. Req. min. 196" wb w/ 60" walking beam, 60" HAS or 51" Airliner tandem susp. Req. min. 208" wb w/60" Neway or Airliner 55" and 59" tandem susp.

* Avail. w/Tractor only; N.A. w/148" wb w/tandem axle

113" BBC
AIRLINER SINGLE DRIVE SUSPENSION APPLICATIONS
L8513 Mid-Range Diesel (4x2)

Application	Codes	21,000 Lbs.	Codes	23,000 Lbs.
Body (1) (Truck or Drom)	AABH00 AABH00 AABJ00 AAAM00 AAA400 AAA500	Attic Van Only Dry Van Body Only Flatbed Only (Linehaul-Flatbed) Reefer Van Body Only Tank Only (Bulk Hauler-Dry) Tank Only (Bulk Hauler-Liquid)	AAAG00 AAAG00	All OK except: Mixer (Construction-Concrete Mixer) Mixer with Lifiable Tag axle
Trailer (2) (Tractor or Truck)	AABA00 AAAT00 AABC00 AABD00 AAP00 ABE00	All OK except: Farm (Farm Service/Landscaping) Logging Mining Oil Field Refuse (Refuse-Refuse Collection) Refuse (Refuse/Recycling)		All OK
Expected Terrain	ACAD00 ACAA00	100% On-Highway Max. 10% Off-Highway	ACAD00 ACAA00 ACAB00	100% On-Highway Max. 10% Off-Highway Max. 25% Off-Highway
Most Severe Road Surface	ADAA00 ADAB00 ADAC00 ADAF00	Excellent Highway Smooth Concrete or Asphalt (Typical Highway) Rough Concrete or Asphalt (Broken Concrete) Maintained Gravel only (Packed Gravel)	ADAA00 ADAB00 ADAD00 ADAE00 ADAC00 ADAF00 ADAG00	Excellent Highway Smooth Concrete or Asphalt (Typical Highway) Packed Clay-Bound Gravel Hard Packed Natural Soil Rough Concrete or Asphalt (Broken Concrete) Maintained Gravel (Packed Gravel) Soft Soil/Mud/Debris (Landfill) (Spongy Natural Soil)
Where Domiciled		USA 50 St. Only USA 49 St. Only Canada		All OK
Maximum Expected GCW		115,000 lbs. and less		115,000 lbs. and less
Maximum Total Pusher/Tag Axle GAWR		Not Available		20,000 lbs. and less

(1) Mandatory to also select Vehicle Designation Code AAACOO (Truck)

(2) Mandatory to also select Vehicle Designation Code AAABOO (Tractor) or Code AAADOO (Truck w/Trailer)

113" BBC
AIRLINER TANDEM DRIVE SUSPENSION APPLICATIONS
LT8513 Mid-Range Diesel (6x4)

Application	Codes	40,000 lbs. EXTRA DUTY	Codes	46,000 lbs.
Body (1) (Truck or Drom)	AABH00 AAAL00 AABH00 AABJ00 AAAM00 AAA400 AAA500	Attic Van Only Car/Truck Carrier Body Only (Linehaul-Auto Transport) Dry Van Body Only Flatbed Only (Linehaul-Flat Bed) Reefer Van Body Only Tank Only (Bulk Hauler-Dry) Tank Only (Bulk Hauler-Liquid)	AAAG00 AAAG00 AAA100	All OK except: Mixer (Construction-Concrete Mixer) Mixer with Liftable tag axle Severe Duty (Mixer)
Trailer (2) (Tractor or Truck)		All OK		All OK
Expected Terrain	ACAD00 ACAA00	100% On-Highway Max. 10% Off-Highway Domiciled USA	ACAD00 ACAA00 ACAB00	100% On-Highway Max. 10% Off-Highway Max. 25% Off-Highway
Most Severe Road Surface	ADAA00 ADAB00 ADAC00 ADAF00	Excellent Highway Smooth Concrete or Asphalt (Typical Highway) Rough Concrete or Asphalt (Broken Concrete) Maintained Gravel Domiciled USA or Canada only (Packed Gravel)	ADAA00 ADAB00 ADAD00 ADAE00 ADAC00 ADAF00 ADAG00	Excellent Highway Smooth Concrete or Asphalt (Typical Highway) Packed Clay-Bound Gravel Hard Packed Natural Soil Rough Concrete or Asphalt (Broken Concrete) Maintained Gravel (Packed Gravel) Soft Soil/Mud/Debris (Landfill) (Spongy Natural Soil)
Where Domiciled		USA 50 St. Only USA 49 St. Only Canada Only (See Export Note)		All OK
Maximum Expected GCW		120,000 lbs. and less domiciled in Canada 140,000 lbs. and less domiciled in USA 100,000 lbs. and less Export		180,000 lbs. and less
Maximum Total Pusher/Tag Axle GAWR		12,000 lbs. and less		24,000 lbs. and less
Bulk Commodity or High Load Factor Truck w/out Trailer		OK		OK

(1) Mandatory to also select Vehicle Designation Code AAAC00 (Truck).

(2) Mandatory to also select Vehicle Designation Code AAAB00 (Tractor) or Code AAAD00 (Truck w/Trailer).

Export Note: For export, the AirLiner 40,000 lb. EXTRA DUTY suspension is restricted to on-highway only.