L9511 (Heavy Duty Diesel)

GVWR WITH STANDARD EQUIPMENT – 33,200 LBS.

(Consult Truck Selection Section of the Data Book to Compute GVWR with Optional Equipment)

111" BBC - 4x2

GCWR's – See L/LT Models, Page 1

Maximum GVWR (lbs.) for Specific Wheelbase-Frame Combinations and Warranty			
	Frame Code For Highway Service Only		Frame Code For On-Off Highway Service
WB	40E900[1] 13.3 SM 120K PSI	40FA00 15.9 SM 120K PSI	40FA00 15.9 SM 120K PSI
166-202	35,000[2]	37,600[4]	35,000[2]
208- 262	35,000[2]	35,000[2]	35,000[2]

Actual GAWR is determined by front/rear axle, suspension, and tire & wheel selections in addition to these frame ratings.

[1] *Std. Frame*

[2] *12,000 lb. max. front axle*

[4] *14,600 lb. max. front axle*

*Dimensions in Inches – CA dim. with 111 in. BBC and Sleeper BBS's							
WB	CA	(50" AB)** 155	(68" AB)** 173	Truck AF	Tractor AF[1]	Truck OAL	Tractor OAL
166	84	--	--	58	37	253	232
178	96	--	--	63	37	270	244
190	108	--	--	63	37	282	256
202	120	76	--	63	37	294	268
208	126	--	--	75	37	312	274
214	132	88	70	75	37	318	280
226	144	100	82	75	37	330	292
238	156	112	94	90	37	357	304
250	168	124	106	102	37	381	316
262	180	--	118	114	37	405	328


** Dimensions are for base models w/standard equipment.*

[1] Tractor AF is 40" with 52" springs

*** AB Denotes Flat Top Plus & Aero Bullet Plus Sleeper*

Base Curb Weight (lbs.)		
Front	Rear	Total
7751	3925	11676
7649	4108	11757
7554	4241	11795
7484	4375	11859
7448	4460	11908
7435	4543	11978
7375	4641	12016
7325	4813	12138
7281	4928	12209
7249	5052	12301

Weights are approximate and include minimum required equipment, water and oil (less fuel)

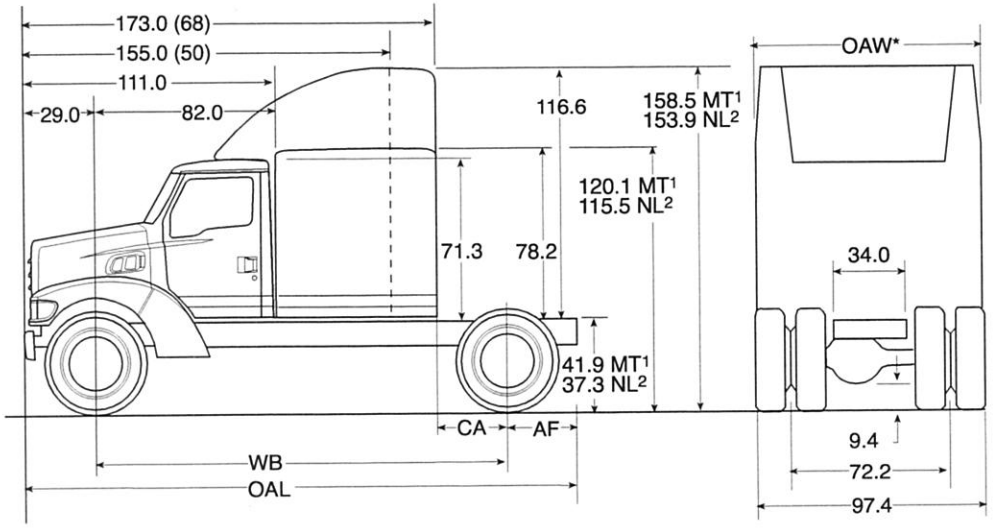

OAW*

90.5" for 50" Sleeper
94.5" for 68" Sleeper
94.4" for cab Full Aero Pkg.
95.6" over front fenders

MT[1] = *Empty*
NL[2] = *Normal Load*

NOTE: Dimensions do not include cab clearance and identification lights.

Note: Recommend adequate tires for axle loadings. See Tires/Wheels/Wheel Equip. Section of Component Information Data Book. All capacity ratings shown represent on-highway application.

LT9511 (Heavy Duty Diesel)

GVWR WITH STANDARD EQUIPMENT – 46,000 LBS.

(Consult Truck Selection Section of the Data Book to Compute GVWR with Optional Equipment)

111" BBC - 6x4

GCWR's – See L/LT Models, Page 1

Maximum GVWR (lbs.) for Specific Wheelbase-Frame Combinations and Warranty						
	Frame Code For On-Highway Service Only					
WB	40E900[1] 13.3 SM 120K PSI	40FA00 15.9 SM 120K PSI	40FB00 20.5 SM 120K PSI	40GN00 26.0 SM 120K PSI	40FC00 27.0 SM 120K PSI	40FD00 30.0 SM 120K PSI
166-178	46,000[2]	56,000[5,8]	56,000[5,8]	N.A.	66,000	66,000
190-202	46,000[2]	53,000[3]	56,000[5,8]	N.A.	66,000	66,000
208-238	46,000[2]	53,000[3]	56,000[5,8]	58,000[6]	66,000	66,000
250-262	46,000[2]	53,000[3]	56,000[5,8]	N.A.	66,000	66,000

Actual GAWR is determined by front/rear axle, suspension, and tire & wheel selections in addition to these frame ratings.

[1] Std. Frame
[2] 12,000 lb. max. front axle
[3] 13,000 lb. max. front axle
[4] 14,600 lb. max. front axle
[5] 16,000 lb. max front axle
[6] 40,000 lb. max. rear axle
[7] Avail. axle combinations allowed: 12K/46K or 20K/40K.
[8] Avail. axle combinations allowed: 12K/46K or 16K/40K.

*Dimensions in Inches – CA dim. with 111 in. BBC and Sleeper BBS's								Base Curb Weight (lbs.)		
		(50" AB)**	(68" AB)**	Truck	Tractor	Truck	Tractor			
WB	CA	155	173	AF[1]	AF[1]	OAL	OAL	Front	Rear	Total
166	84	--	--	60	60	255	255	7836	6457	14293
178	96	--	--	63	60	270	267	7803	6537	14340
190	108	--	--	63	60	282	279	7788	6615	14403
202	120	76	--	63	60	294	291	7783	6708	14491
208	126	--	--	75	60	312	297	7779	6765	14544
214	132	88	70	75	60	318	303	7773	6791	14564
226	144	100	82	75	60	330	315	7774	6853	14627
238	156	112	94	90	60	357	327	7754	6973	14727
250	168	124	106	102	60	381	339	7767	7084	14851
262	180	--	118	114	60	405	351	7773	7170	14943


** Dimensions are for base models w/standard equip,ment.*
*** AB Denotes Flat Top Plus & Aero Bullet Plus Sleeper*
[1] Min. 64" AF for all 60", 55" and 59" Axle Spacing.

Weights are approximate and include minimum required equipment, water and oil (less fuel)

Maximum GVWR (lbs.) for Specific Wheelbase-Frame Combinations and Warranty									
	Frame Code For On-Off Highway Service & Severe Duty Non-Mixer						Frame Code For Mixer Service		
WB	40FA00 15.9 SM 120K PSI	40FE00[9] 20.25 SM 125K PSI	40FB00 20.5 SM 120K PSI	40GN00 26.0 SM 120K PSI	40FC00 27.0 SM 120K PSI	40FD00 30.0 SM 120K PSI	40GN00 26.0 SM 120K PSI	40FC00 27.0 SM 120K PSI	40FD00 30.0 SM 120K PSI
166	52,000[2]	54,600[4]	56,000[5,8]	N.A.	66,000	66,000	N.A.	N.A.	N.A.
178-202	46,000[2]	54,600[4]	54,600[4]	N.A.	66,000	66,000	N.A.	56,000[5,8]	66,000
208	46,000[2]	54,600[4]	54,600[4]	58,000[6]	66,000	66,000	54,600[4]	56,000[5,8]	66,000
214-238	46,000[2]	53,000[3]	54,600[4]	58,000[6]	60,000[7]	66,000	54,600[4]	N.A.	N.A.
250-262	46,000[2]	53,000[3]	54,600[4]	N.A.	60,000[7]	66,000	N.A.	N.A.	N.A.

Actual GAWR determined by front/rear axle, suspension, and tire & wheel selections in addition to these frame ratings.

[2] 12,000 lb. max. front axle
[3] 13,000 lb. max. front axle
[4] 14,600 lb. max. front axle
[5] 16,000 lb. max. front axle
[6] 40,000 lb. max. rear axle
[7] Avail. axle combinations allowed: 12K/46K or 20K/40K
[8] Avail. Axle combinations allowed: 12K/46K or 16K/40K
[9] Avail. as extended frame only

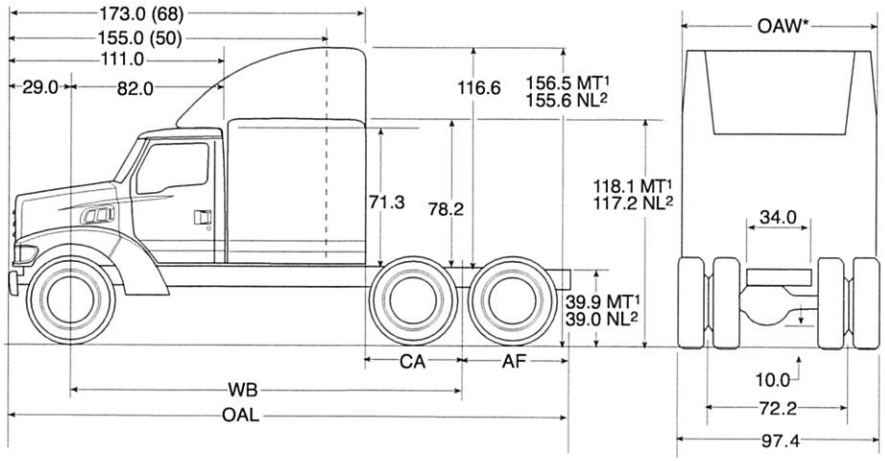

OAW*

90.5" for 50" Sleeper
94.5" for 68" Sleeper
94.4" for Full Aero Pkg.
95.6 over Front Fenders

MT[1] = *Empty*
NL[2] = *Normal Load*

NOTE: Dimensions do not include cab clearance and identification lights.

Note: Recommend adequate tires for axle loadings. See Tires/Wheels/Wheel Equip. Sectionof Component Information Data Book. All capacity ratings shown represent on-highway application.

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — STANDARD EQUIPMENT

SALES CODE		4x2 L9511	6x4 LT9511
	10 — AXLE, FRONT		
10AE00	**12,000 lb.**	S	S
	11 — AXLE, REAR		
	23,000 lb. Single-Speed		
	Meritor RS-23-160	S	
	40,000 lb. Single-Speed		
	Meritor RT-40-145		S
	13 — AXLE EQUIPMENT		
STD.	**Brake Drums, Front & Rear — Full Cast**	S	S
STD.	**Bushings, Kingpin, Front Axle, Bronze**	S	S
STD.	**Differential, Inter-Axle — Full Locking Driver Controlled**		S
13A900	**Differential, Main — Non-Locking**	S	S
13AF00	**Drag Link & Tie Rods — Greaseable**	S	S
STD.	**Hubs, Front & Rear — Ductile Iron**	S	S
STD.	**Magnetic Traps, Rear Axle — Drain & Fill Plugs**	S	S
13BT00	**Steering, Power — Integral, TRW TAS-65 Gear**	S	S
13H700	**Wheel Seals — Front, Grease Type**	S	S
STD.	**Wheel Seals — Rear, Wet Type, C.R. "Scotseal", Unitized**	S	S
	16 — BRAKES, SERVICE		
	Brakes, Front, Air — Cam Type		
16AW00	Front — 15″ x 4″ Meritor Q Plus	S	S
16A000	Rear — 16-1/2″ x 7″ Meritor Q Plus	S	S
	19 — BRAKE EQUIPMENT		
19MF00	**ABS, Antilock Brake System — Full Vehicle, Four Channel w/ Wheel-End Sensing**	S	S
19FC00	**Air Compressor, 13.2 CFM, Water Cooled, Bendix Tu-Flo 550**	S	S
19NL00	**Air Reservoir, Steel**	S	S
STD.	**Drain Cocks, Manual**	S	S
	Parking Brake, Spring-Set Rear Axle — Maxi II		
19NY00	Rear, Single Axle *(Two-Wheel)*	S	
19N000	Rear, Tandem Axle *(Four-Wheel)* (Standard w/ truck)		S
STD.	**Slack Adjusters, Front & Rear — 5.5″ Automatic, Gunite**	S	S
	22 — CAB, STEEL		
	Value Interior Trim		
22BJ00	**Medium Graphite Interior Trim Color**	S	S
	23 — CAB EQUIPMENT/ EXTERIOR		
STD.	**Assist Handles, R.H. & L.H.**	S	S
STD.	**Cab Exterior, Standard Level**	S	S
STD.	**Cab Mounts, Front — Trunnion**	S	S
STD.	**Cab Suspension, Rear, Conventional Rubber**	S	S
	Glass		
STD.	**Door Vent Windows, Solar Tinted L.H. & R.H.** *(Two way w/locking latch)*	S	S
STD.	**Windshield & Side Glass — Solar Tinted**	S	S
STD.	**Rear Window, None**	S	S
232H00	**Grille, Hood-Mounted** *(Painted Body Color) (Incl. Med. Titanium headlamp bezels)*	S	S
STD.	**Hood, Accent Bar** *(Painted Body Color)*	S	S
23AB00	**Hood, Forward Tilting Front End**	S	S
23KH00	**Horn, Single — Electric**	S	S
23YX00	**Mirrors, Dual, Western, Painted**	S	S
233B00	**Mirror, Auxiliary, 5.5″ Dia., Bottom Mounted, Painted, R.H. only**	S	S
23RA00	**Mirror Arms, 96″** (Std. w/ Truck)	S	S
STD.	**Windshield Wipers, Interval, Electric** *(w/lift-off "Wet Arm" windshield wiper arms and integral nozzles, electric washer pump & 8-liter reservoir)*	S	S

NOTE: All capacity ratings shown represent on-highway application.

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — STANDARD EQUIPMENT

SALES CODE		4x2 L9511	6x4 LT9511
	24 — CAB EQUIPMENT/ INTERIOR		
24AL00	**Cigar Lighter** *(I/P Mounted)*	S	S
STD.	**Door Locks, Manual L.H. & R.H.**	S	S
STD.	**Floor Mat, Full Vinyl**	S	S
STD.	**Heater, Defroster/ Demister and Fresh Air Ventilation**	S	S
STD.	**Lamp, Dome, Center Mounted**	S	S
STD.	**Radio, None**	S	S
STD.	**Steering Column, Stationary**	S	S
24B500	**Steering Wheel, 18″ Dia.**	S	S
STD.	**Sun Visors, Single, Vinyl — L.H. & R.H.** *(Incl. ticket strap)*	S	S
STD.	**Window Control — Manual** *(Side Windows)*	S	S
	25 — SEATING		
	(Seats are color coordinated to cab trim level. Passenger seat matches driver seat in appearance and material; All seats include seat belts.)		
	National, Mid-Back		
25AACY	**Driver,** Air Suspension *(Incl. Fore-Aft isolator)*	S	S
25GH00	**Passenger,** None	S	S
	OTHER SEATING EQUIPMENT		
	Belts, Seat — Lap and Shoulder, 3-pt. mounting w/ Adjustable D-Ring		
25AAD3	Driver Only	S	S
	26 — INSTRUMENTS/ GAUGES/ SWITCHES/ WARNING DEVICES		
26MR00	**Air Cleaner Restriction Indicator, Air Cleaner Mounted**	S	S
26NN00	**Gauges, Electronic Cluster** *(Incl. speedometer, tachometer, fuel level, coolant temp., voltmeter, oil press. & dual air brake press.)*	S	S
26M700	**Gauge Control Panel, Flat Gauge Insert — R.H.**	S	S
STD.	**Parking Brake Control, I/ P Mounted**	S	S
26MY00	**Turn Signal Switch, Signal-Stat, Non-Cancelling**	S	S
	Warning Lights		
STD.	ABS Anti-Lock System	S	S
STD.	High Beam Indicator	S	S
STD.	Turn Signal Indicators	S	S
STD.	Warning Light & Buzzer — Air Brakes	S	S
	27 — ELECTRICAL		
STD.	**Canadian Daytime Running Lights** (Standard in Canada only)	S	S
	Circuits, Customer Access		
STD.	I/ P Fuse Panel Pkg.	S	S
STD.	Access Circuits Connector *(Eng. compt., rear of cab & rear of chassis w/truck applications; Eng. compt. & rear of cab w/tractor applications)*	S	S
STD.	**Circuit Protectors, Fuses**	S	S
STD.	**Flasher, Emergency**	S	S
STD.	**Lamps, Turn Signal & Side Marker Combination**	S	S
STD.	**Lamps, Turn Signal, Rear/ Side Facing, Hood Mounted**	S	S
	Lights		
STD.	Cab Marker, 5 Lights	S	S
STD.	Head, Two Rectangular Halogen, Dual Beam *(Incl. stalk mounted switch for dimmer and flash to pass)*	S	S
STD.	Hood Mount Turn Signals, 2 Lights	S	S
STD.	Tail, Two w/ Integral Stop, Turn, Backup, and License Plate *(Mounted inside frame rails)*	S	S
STD.	**Taillight Mounting, Inside Frame Rails — 21.56″ Spacing**	S	S
	28 — ALTERNATORS		
28CS00	**100 amp., 1400 watt Leece-Neville, Internally Regulated**	S	S
	29 — BATTERIES/ BOXES/ CABLES		
	Battery, Maintenance-Free Sterling, 12 Volt		
29AP00	**Two, 625 CCA** (93 amp.-hr.)	S	S
	Battery Box, Frame Mounted		
29KE00	**Under Cab, Standard Weight, L.H. — Forward Mounted** *(Incl. frame mtd. cab access steps)*	S	S
	30 — ENGINES		
	(Engine listings show Advertised Horsepower/Advertised Torque/Governed RPM; See Safety-Noise-Emission Section of Component Info. Data Book)		
	CATERPILLAR C-10 *(ELECTRONIC)* **DIESEL**		
30X000	**305 HP/ 1150 lb.-ft./ 1800 RPM**	S	S

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — STANDARD EQUIPMENT

SALES CODE		4x2 L9511	6x4 LT9511
	32 — EXHAUSTS		
32FW00	**Single Vertical Muffler & Vertical Outlet, R.H.** Plain Outlet — Cab Mtd.	S	S
	33 — EXHAUST EQUIPMENT		
STD.	**Straight Vertical Stack End**	S	S
	36 — CLUTCHES		
36A700	**Clutch, Eaton-Spicer** 14″ SD, 2-plate, Ceramic (8-Spring/ 3200 lb.) Manual Adjust	S	S
STD	Clutch Housing, Cast Iron	S	S
	37 — ENGINE EQUIPMENT		
STD.	Air Cleaner, Single Stage, Donaldson	S	S
STD.	Air Intake, Source — Engine, Outside Air	S	S
373000	Engine Mounts, Compression Type	S	S
STD.	Engine Shutoff *(Solenoid)* — Ignition Key	S	S
373600	Fan Clutch, Kysor "On-Off" *(Automatic Cycling)*	S	S
STD.	Hose, Radiator, EPDM Rubber *(Incl. torque controlled clamps)*	S	S
STD.	Radiator, Nominal Cooling — 900 sq. in. cooling module	S	S
STD.	Speed/ Cruise Control *(w/electronic engines)*	S	S
STD.	Starter, Electric	S	S
STD.	Starter Interlock *(Clutch Pedal Actuated)*	S	S
	40 — FRAME — SINGLE REAR AXLES		
40E900	**Single Channel** 13.3 SM, 120,000 PSI	S	
	40 — FRAME — TANDEM REAR AXLES		
40E900	**Single Channel** 13.3 SM, 120,000 PSI		S
	Frame Modifications		
40EL00	Bolted Frame w/ Huck Fasteners at rear cab supt., intermediate and rear suspension crossmembers)	S	S
40EN00	Frame End, Rear, Square Cut	S	S
	43 — FUEL TANKS		
43L700	**Rectangular Tanks, Steel — Shallow** 55 gal. Single R.H.	S	S
	44 — FUEL TANK EQUIPMENT		
STD.	Forward Mounted Fuel Tank, R.H.	S	S
STD.	Fuel Cooler	S	S
STD.	**Fuel Tank Mounting Supports** Standard-Weight Tank Supports	S	S
STD.	**Fuel Lines** Single Draw/ Return	S	S
STD.	**Steps** Cab Length, Fuel Tank Mounted	S	S

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — STANDARD EQUIPMENT

SALES CODE		4x2 L9511	6x4 LT9511
	46 — SUSPENSION, FRONT, MULTI-LEAF, 54″ SPREAD		
46CV00	**12,000 lb. Cap.**	S	S
	47 — SUSPENSION, REAR		
	SUSPENSION, REAR, MULTI-LEAF		
47KA00	**23,000 lb. Capacity** *(Normal Ride) (46″)*	S	
	SUSPENSION, REAR — AUXILIARY		
47KH00	**Single Leaf**	S	
	SUSPENSION, REAR, TANDEM — FOR 40,000 LB. AXLES		
	34,000 lb. Cap. Hendrickson Steel Walking Beam — 52″ Axle Spacing		
47AW00	U2-340		S
	50/ 51/ 52/ 53/ 54 — TIRES-WHEELS		
	Tires, Front		
50ACL0	Two, 275/ 80R 22.5G (14PR) Michelin XZE	S	S
	Tires, Rear		
51ACL0	Four, 275/ 80R 22.5G (14PR) Michelin XZE	S	
51ACL0	Eight, 275/ 80R 22.5G (14PR) Michelin XZE		S
	Wheels, Front		
52G000	Two, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	S	S
	Wheels, Rear		
53G000	Four, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	S	
53G000	Eight, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW		S
	55 — WHEEL & TIRE EQUIPMENT		
STD.	**Wheels, I.S.O. Steel Disc** *(Painted "Vendor White" — Not Pure White or Diamond White)*	S	S
	56 — TRANSMISSIONS		
	9-Speed Direct		
56FN00	Fuller RT-11709H	S	S
	59 — CHASSIS EQUIPMENT		
	Bumper, Front		
59AX00	Steel, Full Width, Painted Med. Titanium	S	S

NOTE: All capacity ratings shown represent on-highway application.

L / LT9511 — 111″ BBC

111″ BBC BASE VEHICLE PRICE ORDER CODES AND ADDITIONAL CHARGES FOR VARIOUS WHEELBASES

4x2

Order Code	Wheelbase	Suggested List Price (U.S. Dollars)
W16600-AC	166″	STD.
W17800-AM	178″	264.00
W19000-A0	190″	264.00
W20200-AC	202″	264.00
W20800-AR	208″	353.00
W21400-AL	214″	431.00
W22600-AC	226″	431.00
W23800-AL	238″	431.00
W25000-AC	250″	431.00
W26200-AC	262″	675.00

6x4

Order Code	Wheelbase	Suggested List Price (U.S. Dollars)
W16600-AD	166″ (Req. optional exhaust)	NC
W17800-AN	178″	STD.
W19000-A1	190″	272.00
W20200-AD	202″	272.00
W20800-AT	208″	272.00
W21400-AM	214″	359.00
W22600-AD	226″	359.00
W23800-AM	238″	359.00
W25000-AD	250″	359.00
W26200-AD	262″	605.00

INTENTIONALLY
BLANK
THIS MAILING

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
CONFIGURATION SALES CODE				L9511	LT9511
STANDARD WHEELBASE				166″	178″
CONFIGURATION PRICE (U.S. Dollars)				61939.00	70384.00
	REFER TO ORDERING INFORMATION — RPO OR TFT FOR MANDATORY VEHICLE APPLICATION CODES AND THEIR DEFINITIONS.				
SALES CODE	**10 — AXLE, FRONT**				
10AG00-A6	**10,000 lb.** *(Incl. 10,000 lb. cap. 54″ spread, multi-leaf susp., Code 46CT00, 15″ x 4″ Meritor Q Plus brakes & TAS-65 power steering)*	-29	CR 51.00	O	O
10AE00	**12,000 lb.** *(Incl. 12,000 lb. cap. 54″ spread, multi-leaf susp., Code 46CV00, 15″ x 4″ Meritor Q Plus brakes & TAS-65 power steering)* ***(Standard)***	—	—	S	S
10AM00-AE	**13,000 lb.** *(Incl. 13,200 lb. cap. 54″ spread, multi-leaf susp., Code 46CW00, 15″ x 4″ Meritor Q Plus brakes & TAS-65 power steering)*	15	323.00	O	O
10A200-AN	**14,600 lb.** *(Incl. 14,600 lb. cap. 54″ spread, multi-leaf susp., Code 46CX00, 16-1/2″ x 6″ Meritor Q Plus brakes Code 16A200 & TAS-65 L.H. & RCS-65 R.H. dual power steering)*	279	1480.00	O	O
10AF00-AW	**16,000 lb.** *(Incl. 16,000 lb. cap. 54″ spread, multi-leaf susp., Code 46CY00, 16-1/2″ x 6″ Meritor Q Plus brakes Code 16A200 & TAS-65 L.H. & RCS-65 R.H. dual power steering) (Avail. w/truck or on-off hwy. tractor only)*	314	1673.00		O
10AD00-AM	**18,000 lb.** *(Incl. 18,000 lb. cap. 54″ spread, multi-leaf susp., Code 46C000, 16-1/2″ x 6″ Meritor Q Plus brakes Code 16A200 & TAS-65 L.H. & RCS-65 R.H. dual power steering gears) (Avail. w/truck or on-off hwy. tractor only)*	332	2877.00		O
10AH00-AF	**20,000 lb.** *(Incl. 20,000 lb. cap. 54″ spread, multi-leaf susp., Code 46C100, 16-1/2″ x 6″ Meritor Q Plus brakes Code 16A200 & TAS-65 L.H. & RCS-65 R.H. dual power steering gears) (Avail. w/truck or on-off hwy. tractor only)*	355	3560.00		O
	11 — AXLE, REAR				
	23,000 lb. Single-Speed Meritor RS-23-160 ***(Standard)***	—	—	S	S
	2.80 11ABG0-AB 3.73 11CC00-AX 5.38 11CJ00-AT 2.93 11AAF7-AB 3.91 11CD00-AY 5.63 11CK00-AT 3.07 11V500-AJ 4.10 11CE00-AY 6.14 11CL00-AL 3.21 11V600-AJ 4.30 11CF00-AY 6.43 117J00-AD 3.42 11CA00-AP 4.56 11CG00-BL 6.83 11CM00-AM 3.58 11CB00-AP 4.89 11CH00-AO 7.17 11CN00-A7				
	23,000 lb. Single-Speed Meritor RS-23-161 *(Req. Neway AD-123 air susp. Code 47KG00)*	24	33.00	O	
	2.80 11ACC0-AB 4.30 114900-AB 2.93 11ACD0-AB 4.56 11AAF3-AB 3.07 11ACE0-AB 4.89 11ACL0-AB 3.21 11ACF0-AB 5.38 11ACM0-AB 3.42 11ACG0-AB 5.63 11ACN0-AB 3.58 114300-AB 6.14 11ACP0-AB 3.73 11ACH0-AB 6.43 11ACQ0-AB 3.91 11ACJ0-AB 6.83 11AAFB-AB 4.10 11ACK0-AB 7.17 11ACR0-AB				
	23,000 lb. Single-Speed Meritor RS-23-186	56	516.00	O	
	2.93 11ALF0-AB 4.56 11ALP0-AB 3.08 11ALG0-AB 4.89 11ALQ0-AB 3.21 11AFR0-AB 5.13 11ALR0-AB 3.42 11ALH0-AB 5.38 11ALS0-AB 3.58 11ALJ0-AB 5.63 11ALT0-AB 3.73 11ALK0-AB 5.86 11ALU0-AB 3.91 11ALL0-AB 6.14 11ALV0-AB 4.10 11ALM0-AB 6.83 11ALW0-AB 4.30 11ALN0-AB 7.17 11ALX0-AB				

NOTE: All capacity ratings shown represent on-highway application.

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	11 — AXLE, REAR (Continued)				
	40,000 lb. Single-Speed **Meritor RT-40-145** *(Standard)*	—	—		S
	2.79 11AHG0-AB 4.33 118100-AR 2.93 119800-AB 4.63 118200-AR 3.07 11G400-AK 4.88 11FG00-AV 3.21 11G500-AK 5.29 11FH00-AJ 3.42 11E900-AP 5.86 11FJ00-AJ 3.58 11FA00-AP 6.14 11FK00-AB 3.73 11FB00-BJ 6.43 11FL00-AB 3.90 11AHH0-AB 6.83 11G700-AB 4.11 11AHJ0-AB 7.17 11FM00-AB				
	40,000 lb. Single-Speed **Meritor RT-40-145P**	30	344.00		O
	2.79 11AHK0-AB 4.33 118300-AR 2.93 119M00-AB 4.63 118400-AR 3.07 11MX00-AJ 4.88 11FY00-AT 3.21 11P700-AJ 5.29 11F000-AJ 3.42 11FN00-AN 5.86 11F100-AJ 3.58 11FP00-AN 6.14 11F200-AB 3.73 11FR00-AT 6.43 11F300-AB 3.90 11AHL0-AB 6.83 11WK00-AB 4.11 11AHM0-AB 7.17 11F400-AB				
	46,000 lb. Single-Speed w/ 46,000 lb. susp. *(Incl. RT2-460 susp. w/Bronze center bushings & 54″ axle spacing Code 47BC00) (N.A. w/any HFS or HAS susp.)* **Meritor RT-46-160**	829	3351.00		O
	3.07 11YF00-AH 4.56 11GG00-AM 3.21 11YG00-AH 4.89 11GH00-AM 3.42 11GA00-AM 5.38 11GJ00-AE 3.58 11GB00-AM 5.63 11GK00-AE 3.73 11GC00-AM 6.14 11KJ00-AB 3.91 11GD00-AM 6.43 11PC00-AB 4.10 11GE00-AM 6.83 11PG00-AB 4.30 11GF00-AM 7.17 11PH00-AB				
	46,000 lb. Single-Speed w/ 46,000 lb. susp. *(Incl. RT2-460 susp. w/Bronze center bushings & 54″ axle spacing Code 47BC00) (N.A. w/any HFS or HAS susp.)* **Meritor RT-46-160P** *(Req. driver controlled main rear axle locking differential Code 13AW00)*	859	3591.00		O
	3.07 11YH00-AH 4.56 11GX00-AM 3.21 11YJ00-AH 4.89 11GY00-AM 3.42 11GL00-AM 5.38 11G000-AE 3.58 11GN00-AM 5.63 11G100-AE 3.73 11GR00-AM 6.14 11N000-AB 3.91 11GT00-AM 6.43 11AADT-AB 4.10 11GV00-AM 6.83 11TA00-AB 4.30 11GW00-AM 7.17 11XA00-AB				

NOTE: All capacity ratings shown represent on-highway application.

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	13 — AXLE EQUIPMENT				
STD.	**Brake Drums, Front & Rear — Full Cast** *(Standard)*	—	—	S	S
	Brake Drums, Centrifuse *(N.A. w/cast spoke wheels)*				
13AP00-BF	— Front *(Avail. w/10,000 lb. Front Axle Code 10AG00 or 12,000 lb. Front Axle Code 10AE00 only; Avail. w/on-hwy. tractor only)*	-24	283.00	O	O
13AR00-BM	— Rear, Single Axle *(N.A. w/severe duty)*	-36	283.00	O	
13AR00-BN	— Rear, Tandem Axle *(N.A. w/severe duty)*	-72	567.00		O
	Bushings, Kingpin, Front Axle				
STD.	— Bronze *(Standard)*	—	—	S	S
13A300-BL	— Garlock Low Friction *(Avail. w/10,000 lb. Front Axle Code 10AG00, 12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00 only)*	0	331.00	O	O
STD.	**Differential, Inter-Axle — Full Locking Driver Controlled** *(Standard)*	—	—		S
13A900	**Differential, Main — Non-Locking** *(Standard)*	—	—	S	S
	Differential, Main, Lockout — Full Locking, Wheel to Wheel, Driver Controlled				
13AW00-BM	— Rear, Single Axle	15	351.00	O	
13AW00-BN	— Rear, Tandem Axle *(Both rear axles) (N.A. when air susp. dump valve Code 48AC00 is used in comb. w/air slide fifth wheel & inside/outside air Code 373T00)*	30	700.00		O
13AF00	**Drag Link & Tie Rods — Greaseable** *(Standard)*	—	—	S	S
	Driveline — Half Round Yoke *(See Component Book, U-Joint Chart in Axle Equipment & Driveline Section for size and availability)*				
13AG00-BR	— Heavy Duty U-Joints	20	59.00	O	
13AG00-BW	— Heavy Duty U-Joints	19	83.00		O
STD.	**Hubs, Front & Rear — Ductile Iron** *(Standard)*	—	—	S	S
	Hubs, Aluminum				
13AT00-AX	— Front *(Avail. w/10,000 lb. Front Axle Code 10AG00 or 12,000 lb. Front Axle Code 10AE00; For on-hwy. service only) (Req. Garlock bushings Code 13A300 when used w/ABS brakes)*	-17	327.00	O	O
13AV00-CF	— Rear, Single Axle *(N.A. for severe duty)*	-40	335.00	O	
13AV00-CG	— Rear, Tandem Axle *(N.A. for severe duty)*	-80	727.00		O
	Hubs, High Tensile Ferrous *(Avail. For on-hwy. service only)*				
13HW00-AC	— Front *(Avail. w/10,000 lb. Front Axle Code 10AG00 or 12,000 lb. Front Axle Code 10AE00)*	-17	287.00	O	O
13HX00-AE	— Rear, Single Axle	-30	287.00	O	
13HX00-AF	— Rear, Tandem Axle *(Avail. w/40,000 lb. Rear Axle only)*	-60	573.00		O
STD.	**Magnetic Traps, Rear Axle — Drain & Fill Plugs** *(Standard)*	—	—	S	S
13AB00-BP	**Shock Absorbers, Front — Double Acting Telescopic** *(Incl. w/taper-leaf springs)*	25	115.00	O	O
13BT00	**Steering, Power — Integral, TRW TAS-65 Gear** *(Standard)*	—	—	S	S
	Synthetic Lube - Mobil 75W-90				
	Single Rear Axle				
13F300-AK	23,000 lb. cap.	0	123.00	O	
	Tandem Rear Axle				
13F300-AD	40,000 lb. cap.	0	193.00		O
13F300-AP	46,000 lb. cap.	0	257.00		O
13F200-AB	**Wheel Lube, Front Axle** *(Req. wet type wheel seal Code 13H600)*	0	31.00	O	O
	Wheels Seals — Front *(See Component Information Data Book for details)*				
13H700	**Grease Type** *(Standard)*	—	—	S	S
13H600-AA	**Wet Type, Oil, Unitized**	2	28.00	O	O
	Wheel Seals — Rear *(See Component Information Data Book for details)*				
STD.	**Wet Type, C.R. "Scotseal", Unitized** *(Standard)*	—	—	S	S
	Wet Type, Stemco "Grit-Guard", Two Piece				
13A000-BY	— Single Axle	1	23.00	O	
13A000-B0	— Tandem Axle	3	44.00		O

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	16 — BRAKES, SERVICE				
	Brakes, Front, Air — Cam Type				
16AW00	— **Front** — 15″x4″ Meritor Q Plus *(Incl. w/10,000 lb. Front Axle Code 10AG00, 12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00)* ***(Standard)***	—	—	S	S
16A100-BD	— **Front** — 16-1/2″x5″ Meritor Q Plus *(Avail. w/12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00 only; N.A. w/alum. hubs, high tensile hubs or centrifuse brake drums)*	30	123.00	O	O
16A000	— **Rear** — 16-1/2″x7″ Meritor Q Plus ***(Standard)***	—	—	S	S
	19 — BRAKE EQUIPMENT				
	ABS, Antilock Brake System — Full Vehicle, Four Channel				
19MF00	— Incl. wheel-end sensing ***(Standard)***	—	—	S	S
	Air Compressor				
19FC00	— **13.2 CFM, Water Cooled, Bendix Tu-Flo 550** ***(Standard)***	—	—	S	S
19FC00-BV	— **13.2 CFM, Water Cooled, Bendix Tu-Flo 550** *(Avail. w/Cummins eng.)*	0	264.00	O	O
	— **16.5 CFM, Water Cooled, Bendix Tu-Flo 750**				
19FD00-A9	— Avail. w/ Cat. or DDC-60 eng. only	14	316.00	O	O
19FD00-BA	— Avail. w/ Cummins eng. only	0	656.00	O	O
STD.	**Air Dryer — None** ***(Standard)***	—	—	S	S
19A700-BP	**Air Dryer, Heated — Bendix AD-9** *(Mounted on L.H. frame rail, aft of front wheelwell)*	27	356.00	O	O
19NF00-AC	**Air Dryer, Heated — Bendix, AD-IP** *(System Guard, Integral Purge) (Mounted on L.H. frame rail, aft of front wheelwell)*	34	356.00	O	O
	Air Reservoir Tanks				
	Single Axle				
19NG00-AC	Lightweight, Aluminum *(Painted Black)*	-30	359.00	O	
19NL00	Steel ***(Standard)***	—	—	S	
	Tandem Axle				
	Lightweight, Aluminum *(Painted Black)*				
19NG00-AL	— N.A. w/ between rails battery box or dual horiz. mufflers	-30	359.00		O
19NG00-AE	— Use w/ between rails battery box only	-30	359.00		O
19NG00-AG	— Use w/ dual horiz. mufflers only	-30	359.00		O
	Steel				
19NL00	— N.A. w/ between rails battery box or dual horiz. mufflers ***(Standard)***	—	—		S
19NL00-AA	— Use w/ between rails battery box only	0	NC		O
19NL00-AC	— Use w/ dual horiz. mufflers only	0	NC		O
19QA00-AB	**Brake Control Valve, Rear Brakes, Hand Operated** *(For truck use only) (N.A. w/two pass. seat Code 25AADF)*	2	121.00	O	O
19BV00-AB	**Brake Control Valve, Trailer, Hand Operated — DELETE** *(For trailer towing pkg. Code 19NH00 or tractor pkg. only)*	-2	CR 15.00	O	O
	Brake Dust Shields				
	Single Axle				
19JE00-BE	— Use w/ on-hwy. applications	12	27.00	O	
19JE00-BM	— Required w/ on-off hwy. or severe duty applications	12	NC	O	
	Tandem Rear Axle				
19JE00-BF	— Use w/ on-hwy. applications	19	53.00		O
19JE00-BN	— Required w/ on-off hwy. or severe duty applications	19	NC		O
STD.	**Drain Cocks, Manual** ***(Standard)***	—	—	S	S
19NM00-AB	**Drain Cocks, Manual w/ Lanyard Cable** *(In lieu of manual drain cocks)*	1	23.00	O	O
19AL00-BT	**Moisture Ejectors, Automatic, Non-Heated — Bendix, DV-2** *(In lieu of manual drain cocks)*	1	49.00	O	O
19AV00-AE	**Moisture Ejectors, Automatic, Heated — Bendix, DV2** *(In lieu of manual drain cocks)*	1	79.00	O	O

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	19 — BRAKE EQUIPMENT (Continued)				
	Parking Brake, Spring-Set Rear Axle — Maxi II				
19NY00	— Rear, Single Axle — Two-Wheel ***(Standard)***	—	—	S	
19N000	— Rear, Tandem Axle — Four-Wheel ***(Standard w/ truck)***	—	—		S
19N000-AC	— Rear, Tandem Axle — Four-Wheel *(Avail. w/tractor only)*	0	NC		O
	Parking Brake, Spring-Set Rear Axle — MGM *(In lieu of Maxi II)*				
19N100-AD	— Rear, Single Axle — Two-Wheel	-20	NC	O	
19N100-AG	— Rear, Tandem Axle — Two-Wheel *(Avail. w/tractor only)*	-20	NC		O
19N200-AC	— Rear, Tandem Axle — Four-Wheel *(Avail. w/truck only)*	-40	NC		O
19N200-AG	— Rear, Tandem Axle — Four-Wheel *(Avail. w/tractor only)*	-40	NC		O
STD.	**Slack Adjusters, Front & Rear — 5.5″ Automatic, Gunite** ***(Standard)***	—	—	S	S
	Traction Control, Automatic *(Req. ABS brake system) (N.A. w/Cat. 3306 or 3406C eng.)*				
19QG00-AC	— Single Rear Axle	0	751.00	O	
19QG00-AA	— Tandem Rear Axle *(Incl. four channel, six sensor ABS)*	1	751.00		O
19NH00-AB	**Trailer Towing Pkg. — Truck w/ Trailer** *(Air & elec. lines to end of frame) (Incl. tractor protection control valve & hand operated trailer brake control valve; Req. min. 190″ wb; Avail. w/outside frame rail taillight mounting Code 275600 and truck w/trailer application Code AAAD00 only) (N.A. w/any tractor pkg. or single horiz. muffler/dual vert. exhaust outlet stacks Code 32F100/32F200)*	20	443.00	O	O
	20 — TRACTOR EQUIPMENT *(See Component Information Data Book for complete content)*				
	TRACTOR PACKAGE *(Incl. tractor protection control valve, hand operated trailer brake control valve, rear bobtail proportioning valve [in lieu of std. R-12 relay valve], tapered frame ends exc. w/reinforced frames, Signal-Stat non-cancelling turn signal switch, fixed trailer hook-up light with I/P switch w/"On" indicator, 102" mirror arms Code 23BP00, solar tint rear cab window Code 23YL00 & mud flap brackets)*				
	Single Axle *(Incl. 21,000 lb. multi-leaf rear susp. Code 47J700) (Deletes std. aux. susp. Code 47KH00)*				
	— **On-Highway** *(Requires Focal engine mounts Code 373100 w/10,000 lb. Front Axle code 10AG00, 12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00) (N.A. w/Cat. 3406C eng.)*				
20AB00-B3	— w/ 10′ Air & Electrical Tractor/ Trailer Lines *(N.A. w/sleeper or unipac tractor pkg. Code 20GE00)*	-30	459.00	O	
20AC00-BR	— w/ 12′ Air & Electrical Tractor/ Trailer Lines *(N.A. w/sleeper or unipac tractor pkg. Code 20GE00)*	-30	471.00	O	
20AE00-B9	— w/ 12′ Coiled Air & Electrical Tractor/ Trailer Lines *(N.A. w/sleeper or unipac tractor pkg. Code 20GE00)*	-29	480.00	O	
20GE00-AY	— Unipac Tractor Package *(w/12′ coiled air & electric lines; Avail. without sleeper; Incl. w/sleeper cabs; Mtd. to L.H. lower back panel) (Incl. single fixed focus trailer hook-up light in lieu of the hook-up light included w/tractor pkg.)*	-28	524.00	O	
	— **On-Off Highway** *(Incl. std. compression type engine mounts)*				
20AB00-BR	— w/ 10′ Air & Electrical Tractor/ Trailer Lines *(N.A. w/sleeper or unipac tractor pkg. Code 20GE00)*	-30	459.00	O	
20AC00-BD	— w/ 12′ Air & Electrical Tractor/ Trailer Lines *(N.A. w/sleeper or unipac tractor pkg. Code 20GE00)*	-30	471.00	O	
20AE00-BX	— w/ 12′ Coiled Air & Electrical Tractor/ Trailer Lines *(N.A. w/sleeper or unipac tractor pkg. Code 20GE00)*	-29	480.00	O	
20GE00-AJ	— Unipac Tractor Package *(w/12′ coiled air & electric lines; Avail. without sleeper; Incl. w/sleeper cabs; Mtd. to L.H. lower back panel) (Incl. single fixed focus trailer hook-up light in lieu of the hook-up light incl. w/tractor pkg.)*	-28	524.00	O	

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	20 — TRACTOR EQUIPMENT *(See Component Information Data Book for complete content)* **(Continued)**				
	TRACTOR PACKAGE *(Incl. tractor protection control valve, hand operated trailer brake control valve, rear bobtail proportioning valve [in lieu of std. R-12 relay valve], tapered frame ends exc. w/reinforced frames, Signal-Stat non-cancelling turn signal switch, fixed trailer hook-up light with I/P switch w/"On" indicator, 102" mirror arms Code 23BP00, solar tint rear cab window Code 23YL00 & mud flap brackets)* **(Continued)**				
	Tandem Axle *(N.A. w/front frame extension & 250″ or 262″ wb; N.A. w/front bumper extension & 262″ wb)*				
	— **On-Highway** *(Requires Focal engine mounts Code 373100 w/10,000 lb. Front Axle Code 10AG00, 12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00) (Incl. two-wheel spring-set parking brakes Maxi II) (N.A. w/Cat. 3406C eng.)*				
20AB00-BY	— w/ 10′ Air & Electrical Tractor/ Trailer Lines *(N.A. w/sleeper or unipac tractor pkg. Code 20GE00)*	35	661.00		0
20AC00-BL	— w/ 12′ Air & Electrical Tractor/ Trailer Lines *(N.A. w/sleeper or unipac tractor pkg. Code 20GE00)*	35	671.00		0
20AE00-B5	— w/ 12′ Coiled Air & Electrical Tractor/ Trailer Lines *(N.A. w/sleeper or unipac tractor pkg. Code 20GE00)*	36	681.00		0
20GE00-AT	— Unipac Tractor Package *(w/12′ coiled air & electric lines; Avail. without sleeper; Incl. w/sleeper cabs; Mtd. to L.H. lower back panel) (Incl. single fixed focus trailer hook-up light in lieu of the hook-up light included w/tractor pkg.)*	37	725.00		0
	— **On-Off Highway** *(Incl. std. compression type engine mounts & two-wheel parking brakes Maxi II)*				
20AB00-BT	— w/ 10′ Air & Electrical Tractor/ Trailer Lines *(N.A. w/sleeper or unipac tractor pkg. Code 20GE00)*	35	519.00		0
20AC00-BE	— w/ 12′ Air & Electrical Tractor/ Trailer Lines *(N.A. w/sleeper or unipac tractor pkg. Code 20GE00)*	35	528.00		0
20AE00-BY	— w/ 12′ Coiled Air & Electrical Tractor/ Trailer Lines *(N.A. w/sleeper or unipac tractor pkg. Code 20GE00)*	36	539.00		0
20GE00-AK	— Unipac Tractor Package *(w/12′ coiled air & electric lines; Avail. without sleeper; Incl. w/sleeper cabs; Mtd to L.H. lower back panel) (Incl. single fixed focus trailer hook-up light in lieu of the hook-up light incl. w/tractor pkg.)*	37	583.00		0
	21 — SLEEPER CAB *(Avail. for tractor service only) (Incl. unipac tractor pkg. Code 20GE00 & separate circuit panel w/fuses; Req. hydromount Code 23LT00 or cab rear air suspension Code 23A500; N.A. w/reinforced frame for on-off hwy. service; Incl. cab-to-sleeper transition panels; Incl. arctic insulation; Deletes cab rear window) (N.A. w/Cat. 3306 or 3406C eng.) (See Component Information Data Book for complete description of contents)*				
	Aero Bullet Plus *(Incl. cab & sleeper valance panels) (N.A. w/alum. cab)*				
	— **50″ w/ Mid-Level Int. Trim** *(Avail. w/Prestige int. cab trim only)*				
21YH00-AB	—**Medium Graphite Interior Trim Color**	850	9927.00	0	0
	— **50″ w/ Hi-Level Int. Trim** *(Avail. w/Prestige int. cab trim only)*				
21YJ00-AB	— **Color Keyed to Cab Interior**	885	11185.00	0	0
	— **68″ w/ Hi-Level Int. Trim** *(Avail. w/Prestige int. cab trim only)*				
21YK00-AB	— **Color Keyed to Cab Interior**	1080	12640.00	0	0
	Flattop Plus *(N.A. w/alum. cab)*				
	— **50″ w/ Mid-Level Int. Trim** *(Avail. w/Prestige int. cab trim only)*				
21YE00-AB	— **Medium Graphite Interior Trim Color**	703	8339.00	0	0
	— **50″ w/ Hi-Level Int. Trim** *(Avail. w/Prestige int. cab trim only)*				
21YF00-AB	— **Color Keyed to Cab Interior**	738	9208.00	0	0
	— **68″ w/ Hi-Level Int. Trim** *(Avail. w/Prestige int. cab trim only)*				
21YG00-AB	— **Color Keyed to Cab Interior**	887	12019.00	0	0

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	SLEEPER OPTIONAL EQUIPMENT				
21XV00-AA	**Air Conditioning & Heater, Auxiliary** *(Req. cab air conditioning Code 24AJ00; Avail. for 50″ Flattop Plus sleeper only; Incl. w/Aero Bullet Plus or 68″ Flattop Plus)*	37	591.00	0	0
	Aerodynamic Equipment — Sleeper				
21W600-AA	**Trim Pkg., Sleeper** *(Incl. side extenders, cab & sleeper valance panels and back of sleeper access grab handles) (Req. Special Paint Option 42) (Min. 214″ wb w/50″ Flattop or Aero Bullet sleeper in comb. w/back-of-cab access pkg.; Min. 238″ wb w/68″ Flattop or Aero Bullet sleeper in comb. w/back-of-cab access pkg.)*	25	735.00	0	0
21W800-AA	**Bunk, Upper, Fixed** *(w/foam mattress) (Avail. for 68″ Aero Bullet Plus sleeper only) (Incl. swivel spot reading light)*	87	336.00	0	0
21X300-AA	**Bunk, Upper, Fold-up** *(9″) (w/foam mattress) (Avail. for 68″ Aero Bullet Plus sleeper only) (Incl. swivel spot reading light)*	87	499.00	0	0
21X000-AA	**Mattress, Innerspring** *(For lower bunk only in lieu of foam mattress)*	5	28.00	0	0
21BV00-AA	**Refrigerator/ Freezer** *(Avail. w/68″ sleepers only)*	41	627.00	0	0
21XW00-AA	**Window, Side, Slide Opening L.H. & R.H.** *(Avail. w/Aero Bullet Plus sleeper only in lieu of roof side air vents) (Incl. screens & roll-up privacy curtains)*	22	244.00	0	0
	22 — CAB				
	CAB, ALUMINUM *(Avail. w/on-hwy. tractor only; Req. hydromount cab mount Code 23LT00 or cab rear air susp. Code 23A500) (N.A. w/walking beam tandem rear suspensions) (N.A. w/sleeper, Cat. 3306 eng., 3406C eng., cab mtd. exhaust, or Donaldson dual element 2-stage air cleaner Code 373P00) (See Component Information Data Book for complete details)*				
	— **Value Interior Trim** *(Incl. vinyl seat trim Code 25AAD8, hardboard headliner & lower back panel, L.H. cowl side panel w/integral footrest, black vinyl floor mat, steering column shroud, 18″ steering wheel, padded vinyl sun visors w/ticket strap, scuff plates, L.H./R.H. metal assist handles, coat hook, center mounted dome lamp, L.H./R.H. door courtesy lamps & storage pockets)*				
22BD00-AC	— **Medium Graphite Interior Trim Color**	-140	1467.00	0	0
	— **Custom Interior Trim** *(Incl. knit vinyl seat trim Code 25AAD7, hardboard headliner & lower back panel, back panel storage net, L.H. cowl side panel w/integral footrest, black vinyl floor mat, vinyl trimmed doors w/map pockets, L.H./R.H. padded armrests, steering column shroud, 18″ steering wheel, padded vinyl sun visors w/ticket strap, scuff plates, L.H./R.H. molded assist handles, two coat hooks, center mounted dome lamp, L.H./R.H. door courtesy lamps & storage pockets)*				
22B800-AA	— **Medium Graphite Interior Trim Color**	-147	1671.00	0	0
	— **Prestige Interior Trim** *(Incl. polyknit vinyl (cloth) seat trim Code 25AAD9, cloth trimmed full headliner & carpet trimmed back panel w/storage net, L.H./R.H. cowl side panels w/integral footrest, black vinyl floor mat, vinyl trimmed "B" pillars, polyknit trimmed doors w/map pockets, "A" pillar garnish molding, L.H./R.H. padded armrests, steering column shroud, 18″ steering wheel, padded vinyl sun visors w/storage pouch, scuff plates, L.H./R.H. molded assist handles, two coat hooks, center mounted dome lamp, L.H./R.H. door courtesy lamps & storage pockets)*				
22BE00-AE	— **Medium Graphite Interior Trim Color**	-144	1805.00	0	0
22B600-AA	— **Medium Mocha Interior Trim Color**	-144	1805.00	0	0
22B700-AA	— **Cordovan Interior Trim Color**	-144	1805.00	0	0

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	22 — CAB (Continued)				
	CAB, STEEL *(See Component Information Data Book for complete details)*				
	— **Value Interior Trim** *(Note: N.A. w/sleeper) (Incl. vinyl seat trim Code 25AAD8, hardboard headliner & lower back panel, L.H. cowl side panel w/integral footrest, black vinyl floor mat, steering column shroud, 18″ steering wheel, padded vinyl sun visors w/ticket strap, scuff plates, L.H./R.H. metal assist handles, coat hook, center mounted dome lamp, L.H./R.H. door courtesy lamps & storage pockets)*				
22BJ00	— **Medium Graphite Interior Trim Color** ***(Standard)***	—	—	S	S
	— **Custom Interior Trim** *(Note: N.A. w/sleeper) (Incl. knit vinyl seat trim Code 25AAD7, hardboard headliner & lower back panel, back panel storage net, L.H. cowl side panel w/integral footrest, black vinyl floor mat, vinyl trimmed doors w/map pockets, L.H./R.H. padded armrests, steering column shroud, 18″ steering wheel, padded vinyl sun visors w/ticket strap, scuff plates, L.H./R.H. molded assist handles, two coat hooks, center mounted dome lamp, L.H./R.H. door courtesy lamps & storage pockets)*				
22BW00-AB	— **Medium Graphite Interior Trim Color**	7	203.00	O	O
	— **Prestige Interior Trim** *(Incl. polyknit vinyl (cloth) seat trim Code 25AAD9, cloth trimmed full headliner & carpet trimmed back panel w/storage net, L.H./R.H. cowl side panels w/integral footrest, black vinyl floor mat, vinyl trimmed "B" pillars, polyknit trimmed doors w/map pockets, "A" pillar garnish molding, L.H./R.H. padded armrests, steering column shroud, 18″ steering wheel, padded vinyl sun visors w/storage pouch, scuff plates, L.H./R.H. molded assist handles, two coat hooks, center mounted dome lamp, L.H./R.H. door courtesy lamps & storage pockets)*				
22B000-AB	— **Medium Graphite Interior Trim Color**	10	339.00	O	O
22B100-AB	— **Medium Mocha Interior Trim Color**	10	339.00	O	O
22B200-AB	— **Cordovan Interior Trim Color**	10	339.00	O	O
	APPLIED GRAPHICS, ACCENT *(N.A. w/butterfly opening hood Code 232000)*				
	Continental				
AGAH00-AB	**Fuchsia**	0	487.00	O	O
AGAK00-AB	**Silver Metallic**	0	487.00	O	O
AGAF00-AB	**Tan**	0	487.00	O	O
AGAJ00-AB	**Teal**	0	487.00	O	O
AGAG00-AB	**Toreador Red**	0	487.00	O	O
	Slipstream *(Avail. w/sleeper only)*				
AGAC00-AA	**Fuchsia**	0	487.00	O	O
AGAE00-AA	**Silver Metallic**	0	487.00	O	O
AGAA00-AA	**Tan**	0	487.00	O	O
AGAD00-AA	**Teal**	0	487.00	O	O
AGAB00-AA	**Toreador Red**	0	487.00	O	O
	23 — CAB EQUIPMENT/ EXTERIOR				
	Aerodynamic Equipment				
	Full Pkg. *(Incl. roof fairing Code 23YF00) (Avail. w/on-hwy. tractor only)*				
23YG00-AC	— Use w/ non-sleeper only *(Incl. integral marker lights in lieu of std. cab mounted & cab side extender pkg. Code 231F00) (Incl. cab valance panels; Req. Special Paint Options 40 & 42)*	293	1119.00	O	O
23YG00-AJ	— Use w/ Flattop Plus Sleeper only *(Incl. sleeper trim pkg. Code 21W600) (Req. Special Paint Options 40 & 42)*	225	1555.00	O	O
	Roof Fairing Pkg. *(On-hwy. only)*				
23YF00-AC	— Use w/ non-sleeper only *(Incl. integral marker lights in lieu of std. cab mounted) (Req. Special Paint Option 40) (N.A. w/side extender pkg. Code 231F00 or prep. pkg. Code 23E100)*	109	561.00	O	O
23YF00-AJ	— Use w/ Flattop Plus sleeper only *(Req. Special Paint Option 40) (N.A. w/sleeper trim pkg. Code 21W600)*	109	785.00	O	O
23E100-A5	**Prep Pkg. — Reinforcements Only** *(For local installation of roof fairing & side extenders) (On-hwy. only) (N.A. w/sleeper)*	1	231.00	O	O
231F00-AD	**Side Extenders Pkg.** *(Incl. cab valance panels; Req. Special Paint Option 42) (Avail. w/on-hwy. tractor only) (N.A. w/sleeper) (N.A. w/roof fairing pkg. Code 23YF00 or prep. pkg. Code 23E100)*	68	353.00	O	O

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	23 — CAB EQUIPMENT/ EXTERIOR (Continued)				
	Back-of-Cab Access Pkg. *(Avail. for tractor applications only; Incl. steps and grab handles) (N.A. w/forward mtd. 70 gal. cyl. fuel tanks in comb. w/L.H. rear mtd. batteries) (Refer to Quarter Fender Restriction charts in the Appendix at the end of this model for additional restrictions.)*				
	NON-SLEEPER *(N.A. w/L.H. 4-battery system w/electronic engines)*				
23YA00-C0	Avail. w/ 166″ wb *(Incl. 24″ deck: 1-24″ tread plate)*	40	379.00	O	O
23YA00-C1	Avail. w/ 178″ wb *(Incl. 30″ deck: 1-30″ tread plate)*	42	409.00	O	O
23YA00-C2	Avail. w/ 190″ wb *(Incl. 24″ deck: 1-18″ & 1-24″ tread plate)*	53	471.00	O	O
23YA00-C3	Avail. w/ 202″ wb *(Incl. 54″ deck: 1-24″ & 1-30″ tread plate)*	56	535.00	O	O
23YA00-C4	Avail. w/ 208″ wb *(Incl. 60″ deck: 2-30″ tread plates)*	58	565.00	O	O
23YA00-C5	Avail. w/ 214″ wb *(Incl. 66″ deck: 2-18″ & 1-30″ tread plate)*	70	595.00	O	O
23YA00-C6	Avail. w/ 226″ wb *(Incl. 78″ deck: 1-18″ & 2-30″ tread plates)*	73	659.00	O	O
23YA00-C7	Avail. w/ 238″ thru 262″ wb *(Incl. 90″ deck: 3-30″ tread plates)*	70	720.00	O	O
	50″ SLEEPER *(N.A. w/166″ thru 190″ wb) (N.A. w/208″ or 262″ wb)* • Req. min. 214″ wb in combination w/ rear mtd. 120 gal. dual fuel tanks and 60″ HAS tandem susp.; Combination N.A. w/ dual horiz. muffler & dual vert. outlet stacks Code 32F300 • Req. min. 214″ wb in combination w/ full aero pkg. Code 23YG00, roof fairings Code 23YF00 or aero trim pkg. Code 21W600 • Req. min. 214″ wb w/ Airliner single susp. • Req. min. 226″ wb in comb. w/ fwd. mtd. 120 gal. fuel tanks, aft-of-cab batt. box, full aero trim pkg. Code 23YG00 or slpr. aero trim pkg. Code 21W600 and single rear susp. • Req. min. 238″ wb in comb. w/ fwd. mtd. 120 gal. fuel tanks, aft-of-cab batt. box, full aero trim pkg. Code 23YG00 or slpr. aero trim pkg. Code 21W600 and tandem rear susp. • Req. min. 238″ wb w/ Airliner tandem susp.				
23YA00-C8	Avail. w/ 202″ wb *(Incl. 18″ deck: 1-18″ tread plate)*	24	347.00	O	O
23YA00-C9	Avail. w/ 214″ wb *(Incl. 24″ deck: 1-24″ tread plate)*	38	379.00	O	O
23YA00-DA	Avail. w/ 226″ wb *(Incl. 36″ deck: 2-28″ tread plates)*	41	441.00	O	O
23YA00-DB	Avail. w/ 238″ wb *(Incl. 48″ deck: 1-18″ & 1-30″ tread plate)*	63	503.00	O	O
23YA00-DC	Avail. w/ 250″ wb *(Incl. 60″ deck: 2-30″ tread plates)*	30	565.00	O	O
	68″ SLEEPER *(N.A. w/166″ thru 208″ wb)* • Req. min. 226″ wb in combination w/ rear mtd. 150 gal. dual fuel tanks and Neway or HAS tandem susp. • Req. min. 238″ wb in combination w/ full aero pkg. Code 23YG00, roof fairings Code 23YF00 or aero trim pkg. Code 21W600 • Req. min. 214″ wb w/ Airliner single susp.				
23YA00-DD	Avail. w/ 226″ wb *(Incl. 18″ deck: 1-18″ tread plate)*	27	347.00	O	O
23YA00-DE	Avail. w/ 238″ wb *(Incl. 30″ deck: 1-30″ tread plate)*	57	409.00	O	O
23YA00-DF	Avail. w/ 250″ wb *(Incl. 42″ deck: 1-18″ & 1-24″ tread plate)*	60	471.00	O	O
23YA00-DG	Avail. w/ 262″ wb *(Incl. 54″ deck: 1-24″ & 1-30″ tread plate)*	60	535.00	O	O
STD.	**Cab Exterior, Standard Level** ***(Standard)***	—	—	S	S
STD.	**Cab Mounts, Front — Trunnion** ***(Standard)***	—	—	S	S
	Cab Suspension, Rear				
STD.	**— Conventional Rubber** *(N.A.w/sleeper or alum. cab)* ***(Standard)***	—	—	S	S
23LT00-AC	**— Hydromount** *(Avail. w/tractor or on-highway truck only)*	2	95.00	O	O
23A500-AD	**— Air** *(Avail. for on-hwy. applications only) (N.A. w/cab mounted exhaust or 20K Front Axle Code 10AH00)*	19	411.00	O	O
	Glass				
STD.	**Door Vent Windows, Solar Tinted L.H./ R.H.** *(Two way w/locking latch)* ***(Standard)***	—	—	S	S
23LX00-AC	**Rear Window, DELETE** *(Avail. w/tractor only)*	-15	CR 43.00	O	O
23YL00-AB	**Rear Window, Fixed, Solar Tinted** *(Avail. w/truck only; Incl. w/tractor; N.A. w/sleeper)*	15	43.00	O	O
STD.	**Rear Window, None** ***(Standard)***	—	—	S	S
STD.	**Windshield & Side Glass — Solar Tinted** ***(Standard)***	—	—	S	S

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	23 — CAB EQUIPMENT/ EXTERIOR (Continued)				
232H00	**Grille, Hood Mounted** *(Painted Body Color) (Incl. Med. Titanium headlamp bezels)* ***(Standard)***	—	—	S	S
232200-AD	**Grille, Radiator Mounted** *(Included w/extended frame Code 40GB00)*	4	87.00	O	O
233C00-AB	**Headlamp Bezels, Bright**	0	31.00	O	O
	Hood, Accent Bar				
232R00-AB	— Bright	3	35.00	O	O
STD.	— Painted Body Color ***(Standard)***	—	—	S	S
	Hood, Forward Tilting Front End				
23AB00	— Without Engine Service Access Door ***(Standard)***	—	—	S	S
232000-AF	— With Full Butterfly Opening *(Req. oil fill & dipstick, serviceability enhanced Code 373900)*	N/ A	671.00	O	O
23KH00	**Horn, Single — Electric** ***(Standard)***	—	—	S	S
	Horns, Dual				
23CV00-BL	— Electric	1	15.00	O	O
23CW00-BP	— Air, Single Base *(N.A. w/Hadley air horns Code 23CX00)*	3	79.00	O	O
23CX00-A7	— Air, Hadley Rectangular, Dual Base *(N.A. w/single base air horns Code 23CW00; Full aero pkg. Code 23YG00; Roof fairing pkg. Code 23YF00 or cab prep. pkg. Code 23E100)*	11	99.00	O	O
	Mirrors, Dual, Western *(Auxiliary convex mirrors are NOT included)*				
23YX00	— Painted Med. Titanium ***(Standard)***	—	—	S	S
23YY00-AB	— Bright *(1)*	0	73.00	O	O
233L00-AB	— Bright, Heated *(Incl. I/P switch w/"On" indicator) (1)*	1	153.00	O	O
23Y000-AC	— Bright, Lighted *(1)*	1	104.00	O	O
23Y200-AC	— Bright, Lighted & Heated *(Incl. I/P switch w/"On" indicator) (1)*	1	184.00	O	O
233K00-AB	— Bright, Motorized, Heated *(Incl. I/P w/"On" indicator) (1)*	8	891.00	O	O
23Y300-AC	— Bright, Motorized, Lighted & Heated *(Incl. I/P switch w/"On" indicator) (1)*	9	921.00	O	O
233J00-AB	— Bright, Motorized-R.H., Manual-L.H., Heated *(Incl. I/P switch w/ "On" indicator) (1)*	5	660.00	O	O
23Y400-AC	— Bright, Motorized-R.H., Manual-L.H., Lighted & Heated *(Incl. I/P switch w/ "On" indicator) (1)*	5	691.00	O	O
	Mirrors, Auxiliary Convex *(Painted aux. w/painted western mirrors only & bright aux. w/bright western mirrors only exc. "Sweet Spot" which may be used with either painted or bright western mirrors)*				
	— 5.5″ Dia., Bottom Mounted				
233B00	— w/ Painted Mirrors, R.H. only ***(Standard)***	—	—	S	S
230Y00-AC	— w/ Painted Mirrors, L.H. & R.H.	1	11.00	O	O
230100-AD	— w/ Bright Mirrors, 2	1	11.00	O	O
	4 — 5.5″ Dia., 2 Top & 2 Bottom Mounted				
23Y600-AC	— w/ Painted Mirrors	1	36.00	O	O
23Y700-AC	— w/ Bright Mirrors	1	36.00	O	O
	2 — 8″ Dia., Bottom Mounted *(8-7/8″ actual size)*				
23Y800-AC	— w/ Painted Mirrors	2	17.00	O	O
23Y900-AC	— w/ Bright Mirrors	2	17.00	O	O
	4 — 8″ Dia., 2 Top & 2 Bottom Mounted *(8-7/8″ actual size)*				
230A00-AC	— w/ Painted Mirrors	5	51.00	O	O
230B00-AC	— w/ Bright Mirrors	5	51.00	O	O
232X00-AB	**"Sweet Spot"** *(Painted Black)*	1	79.00	O	O
230V00-AC	**Dual — 8″ Dia., Bright Head & Mounting Arms, Fender Mounted, 3-Pt Mounting** *(8-7/8″ actual size)*	8	123.00	O	O
231P00-AB	**Single R.H. — 8″ Dia., Bright Head & Mounting Arms, Fender Mounted, 3-Pt. Mounting** *(8-7/8″ actual size)*	4	61.00	O	O
23BN00-C3	**Mirrors, Delete Aux. Convex**	-1	CR 11.00	O	O
	Mirror Arms				
23RA00	— 96″ ***(Standard w/ truck)***	—	—	S	S
23RA00-AB	— 96″ *(Avail. w/tractor only)*	-1	CR 12.00	O	O
23BP00-CM	— 102″ *(Avail. w/truck only; Incl. w/tractor)*	1	12.00	O	O

(1) N.A. w/painted aux. convex mirrors exc. "Sweet Spot".

L / LT9511 — 111" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	24 — CAB EQUIPMENT/ EXTERIOR (Continued)				
23YM00-AB	**Splash Guard, Wheel Lip — Rubber**	9	116.00	O	O
23DD00-AD	**Sun Visor, Fiberglass, Exterior** *(N.A. w/cab aero pkg. Code 23YG00 or roof fairing pkg. Code 23YF00 exc. in comb. w/flattop sleeper with either of these options.) (N.A. w/aero prep pkg. Code 23E100) (Req. Special Paint Option 43)*	13	133.00	O	O
STD.	**Windshield Wipers, Interval, Electric** *(w/Lift-Off "Wet Arm" windshield wiper arms and integral nozzles, electric washer pump & 8-Liter reservoir)* ***(Standard)***	—	—	S	S
	24 — CAB EQUIPMENT/ INTERIOR				
24AJ00-BM	**Air Conditioning, Integral w/ Heater** *(Req. standard Kysor "On-Off" fan clutch w/Cat. 3306 eng. Code 30TG00)* *	54	685.00	O	O
24AL00	**Cigar Lighter I/ P Mounted** ***(Standard)***	—	—	S	S
	Console, Storage				
24K800-AB	— **Engine Cover Mounted** *(Incl. ash tray, two cup holders, large tray and storage bin; N.A. w/2 person passenger seat Code 25AADF or HT auto. trans.; Requires I/P mtd. shift control w/HD auto. trans.)*	10	107.00	O	O
24K900-AC	— **Floor Mounted** *(Incl. two cup holders, coin tray, storage bin, CB radio bin, tray & thermos holder; N.A. w/2-pass. seat Code 25AADF, HT-Series auto trans. or sleeper) (Req. I/P mtd. shift control w/MD- or HD-Series trans.)*	8	107.00	O	O
24K700-AC	— **Header Mounted** *(Avail. w/Prestige interior trim only; Incl. header mounted single CB hot post & ground)*	5	207.00	O	O
24GC00-AC	**Door Locks, Electric L.H. & R.H.** *(N.A. w/Value interior trim Code 22BJ00)*	0	113.00	O	O
STD.	**Door Locks, Manual L.H. & R.H.** ***(Standard)***	—	—	S	S
24B400-BW	**Export Decal** *(For Export only)*	0	NC	O	O
24J600-AC	**Filter Pkg., Environmental** *(Incl. fresh air inlet dust filter & recirculated air filter)*	2	44.00	O	O
24LC00-AB	**Floor Covering, Carpet w/ Vinyl Inserts** *(Avail. w/Prestige interior trim only)*	9	35.00	O	O
STD.	**Floor Mat, Full Vinyl, Med. Dark Graphite** ***(Standard)***	—	—	S	S
STD.	**Heater, Defroster/ Demister and Fresh Air Ventilation** ***(Standard)***	—	—	S	S
STD.	**Lamp, Dome, Center Mounted** ***(Standard)***	—	—	S	S
24J900-AC	**Lamp, Dome & Reading, Center Mounted** *(Avail. w/Prestige interior trim only)*	0	29.00	O	O
24LB00-AB	**Lamp, Reading, Over-Door** ***(2)*** *(Avail. w/Prestige interior trim only)*	0	59.00	O	O
	Map Pocket, L.H. Door				
24AM00-AL	— Avail. w/ Value interior trim Code 22BJ00 only *(Incl. w/Custom or Prestige interior trim)*	1	11.00	O	O
	Radio, CB				
24KA00-AC	**Antenna, Dual — Mirror Mounted** *(Incl. single CB hot post & ground mounted in either I/P or header console Code 24K700)*	1	167.00	O	O
	Hot Post & Ground				
24BF00-AC	— Dual, I/ P Mounted *(N.A. w/header mounted storage console Code 24K700)*	1	31.00	O	O
24AH00-A9	— Single, I/ P Mounted *(Avail. with or without header mounted storage console Code 24K700)*	0	15.00	O	O
	Radio, Electronic *(Incl. digital clock)*				
	Premium Sound *(Incl. power amplifier & four speakers)*				
24KB00-AC	— AM/ FM Stereo w/ Cassette Tape Deck	12	707.00	O	O
	Standard Sound *(Incl. two speakers)*				
24AF00-CH	— AM/ FM Stereo	10	463.00	O	O
24H200-AB	— AM/ FM Stereo w/ Cassette Tape Deck & Weather Band *(Incl. dual display, scan & alarm clock)*	11	537.00	O	O
STD.	**Radio, None** ***(Standard)***	—	—	S	S
24KC00-AC	**Radio Prep. Pkg.** *(Incl. antenna, antenna lead, two speakers, bezel, mounting bracket & hot lead; Wired for AM/FM Stereo radio)*	2	104.00	O	O
	Steering Column, Adjustable				
24KD00-AC	— Tilt Only	5	319.00	O	O
24KE00-AB	— Tilt and Telescopic	7	443.00	O	O
STD.	**Steering Column, Stationary** ***(Standard)***	—	—	S	S

** Price excludes Federal Excise Tax of $100.00 (cdn.). Applies for Canada only.*

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	24 — CAB EQUIPMENT/ INTERIOR (Continued)				
	Steering Wheel				
24B500	— 18″ Dia. ***(Standard)***	—	—	S	S
24KF00-AC	— 18″ Dia., Leather Wrapped	0	44.00	O	O
24AP00-CB	— 21″ Dia. *(NOTE: 21″ wheel reduces steering effort approximately 20%. Drivers will experience a lighter road feel than with an 18″ wheel) (N.A. w/electronic engines with speed/cruise control or PTO)*	2	9.00	O	O
STD.	**Sun Visors, Single, Vinyl — L.H. & R.H.** *(Incl. ticket strap)* ***(Standard)***	—	—	S	S
	Sun Visors, Two Way, Vinyl, Integral Side — L.H. & R.H.				
24KG00-AD	— w/ Value or Custom interior trim *(Incl. ticket strap)*	0	52.00	O	O
24KG00-AE	— w/ Prestige interior trim *(Incl. storage pouch)*	0	59.00	O	O
	Window Control — Electric				
24KJ00-AC	— R.H. Side w/ L.H. Control *(Avail. w/Value interior trim only)*	4	104.00	O	O
24KK00-AC	— R.H. & L.H. Sides w/ Dual Control *(Avail. w/Custom trim Code 22BW00 or Prestige interior trim only)*	8	215.00	O	O
STD.	**Window Control — Manual** *(Side Windows)* ***(Standard)***	—	—	S	S
24KL00-AF	**Window, Observation — R.H. Door** *(Incl. wide angle Fresnel lens; R.H. side window drop is restricted) (Deletes R.H. door mtd. map pocket w/Custom or Prestige interior trim)*	2	144.00	O	O
	25 — SEATING				
	(Seats are color coordinated to cab trim level. Passenger seat matches driver seat in appearance and material; All seats include seat belts)				
	Bostrom, Mid-Back, Talladega *(Incl. Fore-Aft Isolator)*				
25AAC0-AC	**Driver, Air-T915,** Air Suspension	-33	31.00	O	O
25AAC9-AC	**Passenger, Air-T915,** Air Suspension	72	668.00	O	O
	Bostrom, Hi-Back, Talladega *(Incl. Fore-Aft Isolator) (N.A. w/armrests w/auto. trans.)*				
	Driver, Air-T915, Air Suspension				
25AAC4-AD	— w/ Value or Custom cab interior trim	-33	313.00	O	O
25AAC4-AK	— w/ Prestige cab interior trim	-33	313.00	O	O
	Passenger, Air-T915, Air Suspension				
25AADD-AD	— w/ Value or Custom cab interior trim	71	680.00	O	O
25AADD-AK	— w/ Prestige cab interior trim	71	680.00	O	O
	National, Mid-Back *(Incl. Fore-Aft Isolator unless noted otherwise)*				
25AACW-AB	**Driver,** Fixed Base, Less Isolator	-49	CR 127.00	O	O
25AACX-AC	**Driver,** Fixed Base	-47	CR 115.00	O	O
25AACY	**Driver,** Air Suspension ***(Standard)***	—	—	S	S
25AAC5-AB	**Passenger,** Fixed Base "Economy" — Non-Adj., Less Isolator	56	320.00	O	O
25AAC6-AB	**Passenger,** Fixed Base, Less Isolator	56	376.00	O	O
25AAC7-AB	**Passenger,** Fixed Base	56	439.00	O	O
25AAC8-AC	**Passenger,** Air Suspension	78	635.00	O	O
	National, Hi-Back *(Incl. Fore-Aft Isolator)*				
25AAC1-AD	**Driver,** Fixed Base	-44	CR 133.00	O	O
25AAC2-AD	**Driver,** Air Suspension	6	12.00	O	O
25AADA-AC	**Passenger,** Fixed Base	57	439.00	O	O
25AADB-AD	**Passenger,** Air Suspension	79	648.00	O	O
	National, Companion, Two Passenger, Fixed Base — Non-Adj. *(Req. brake control valve delete Code 19BV00 when ordered w/trailer towing pkg. Code 19NH00 or tractor pkg.) (N.A. w/sleeper or floor mtd. storage console Code 24K900) (N.A. w/Cat. 3306 eng. Code 30TG00)*				
25AADF-AB	— w/ National Driver Seat	61	557.00	O	O
25AADF-AC	— w/ Bostrom Driver Seat	64	571.00	O	O

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	OTHER SEATING EQUIPMENT				
	Armrests, Dual *(Avail. w/Mid-Back & Hi-Back seats; N.A. w/pedestal mtd. auto. trans. shift control)*				
25AADJ-AC	**Driver**	5	59.00	O	O
25AADK-AC	**Passenger** *(N.A. w/individual seat Code 25AAC5 or two passenger seat Code 25AADF)*	5	59.00	O	O
	Base Cover, Air Suspension *(Avail. w/all National air suspension seats; Incl. w/Bostrom Hi-Back seats Codes 25AAC4 & 25AADD w/Prestige interior trim; N.A. w/Bostrom Mid-Back Seat Codes 25AAC0 & 25AAC9)*				
25AAEF-AC	**Driver Seat**	2	51.00	O	O
25AAEG-AC	**Passenger Seat**	2	51.00	O	O
	Belts, Seat — Lap and Shoulder, 3-pt. mounting w/ Adjustable D-Ring				
25AAD3	**Driver only** ***(Standard)***	—	—	S	S
25AAT0-AB	**Passenger only** *(Incl. w/passenger seat option)*	0	NC	O	O
	Cushion, Seat, Heated — Electric *(Avail. w/National air susp. seats only; N.A. w/swivel base)*				
25AADN-AC	**Driver Seat**	1	87.00	O	O
25AADP-AC	**Passenger Seat**	1	87.00	O	O
	Headrest, Four-Way Adjustable *(Avail. w/mid-back seats only)*				
25AADR-AC	**Driver Seat**	2	133.00	O	O
25AADT-AC	**Passenger Seat** *(N.A. w/seat Code 25AAC5 or 25AAC6)*	2	133.00	O	O
	Lumbar Support, Air *(Incl. w/all National air suspension seats; Incl. w/Bostrom Hi-Back seats Codes 25AAC4 & 25AADD w/Prestige interior trim; N.A. w/Bostrom Mid-Back seats Codes 25AAC0 & 25AAC9)*				
25AADV-AC	**Driver Seat**	1	24.00	O	O
25AADW-AC	**Passenger Seat** *(N.A. w/seat Code 25AAC5 or 25AADF)*	1	24.00	O	O
	Map Pocket, Back of Seat *(Incl. & avail. w/Bostrom Hi-Back seats Codes 25AAC4 & 25AADD w/Prestige interior trim only; N.A. w/Bostrom Mid-Back seats Codes 25AAC0 & 25AAC9; N.A. w/"Less Isolator" seats Codes 25AACW, 25AAC5 or 25AAC6)*				
25AADX-AC	**Driver Seat**	1	7.00	O	O
25AADY-AC	**Passenger Seat** *(N.A. w/2-pass. seat Code 25AADF)*	1	7.00	O	O
	Swivel Base, Seat, Adjustable *(Avail. w/National air suspension seats; Avail. w/Bostrom Hi-Back seats Codes 25AAC4 & 25AADD w/Prestige interior trim; N.A. w/Bostrom Mid-Back seats Codes 25AAC0 & 25AAC9; N.A. w/heated cushion Codes 25AADN or 25AADP)*				
25AAD0-AC	**Driver Seat** *(N.A. w/HT-Series auto. trans.) (N.A. w/pedestal mtd. trans. shift control w/HD or MD auto trans.)*	17	61.00	O	O
25AAD1-AC	**Passenger Seat** *(N.A. w/2-pass. seat Code 25AADF)*	17	61.00	O	O
	26 — INSTRUMENTS/ GAUGES/ SWITCHES/ WARNING DEVICES				
	Air Cleaner Restriction Indicator				
26MR00	**Air Cleaner Mounted** ***(Standard)***	—	—	S	S
26MT00-AC	**I/ P Mounted** *(N.A. in comb. w/digital diagnostic message ctr. Code 26M600 & I/P mtd. push button console Code 57C400)*	0	23.00	O	O
26M600-AA	**Digital Diagnostic Message Center** *(N.A. when I/P mtd. push button console Code 57C400 is used in comb. with I/P mtd. air cleaner restr. gauge Code 26MT00 or brake application air press. gauge Code 26MP00) (N.A. w./Cat. 3306 Code 30TG00 or Cat. 3406C eng.)*	1	671.00	O	O

L / LT9511 — 111" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	26 — INSTRUMENTS/ GAUGES/ SWITCHES/ WARNING DEVICES (Continued)				
	Gauges				
26MP00-AC	— **Brake Application Air Pressure** *(N.A. in comb. w/message ctr. Code 26M600 & IP mtd. PB shift control Code 57C400)*	0	63.00	O	O
26NN00	— **Electronic Cluster** *(Incl. speedometer, tachometer, fuel level, coolant temp., voltmeter, oil press. & dual air brake press.)* ***(Standard)***	—	—	S	S
26AM00-A7	— **Hour Meter** *(Located in tachometer)*	1	48.00	O	O
26NP00-AB	— **Individual Round** *(In lieu of std. electronic cluster) (Incl. speedometer, tachometer, fuel level, coolant temp., voltmeter, oil press. & dual air brake press.)*	0	172.00	O	O
26M900-AA	— **Pyrometer, Exhaust Gas** *(N.A. w/digital message ctr. Code 26M600)*	1	135.00	O	O
26NA00-AA	— **Temperature, Engine Oil, Electric** *(N.A. w/digital message ctr. Code 26M600)*	1	44.00	O	O
	— **Temperature, Rear Axle Lube** *(N.A. w/diagnostic message ctr. Code 26M600) (N.A. in comb. with I/P mtd. push button console Code 57C400)*				
26AN00-AX	— w/ single rear axle	1	40.00	O	
26AN00-A1	— w/ tandem rear axle	2	81.00		O
26AP00-AX	— **Temperature, Transmission Oil** *(N.A. w/digital message ctr. Code 26M600) (N.A. w/any auto. trans.)*	2	24.00	O	O
26M700	**Gauge Control Panel, Flat Gauge Insert — R.H.** ***(Standard)***	—	—	S	S
STD.	**Parking Brake Control, I/ P Mounted** ***(Standard)***	—	—	S	S
26AX00-BW	**Speedometer, Metric** *(N.A. in U.S.)*	0	NC	O	O
	Turn Signal Switch				
26MY00	Signal Stat, Non-Cancelling ***(Standard)***	—	—	S	S
	Warning Lights				
STD.	— ABS Anti-lock System ***(Standard)***	—	—	S	S
STD.	— High Beam Indicator ***(Standard)***	—	—	S	S
STD.	— Turn Signal Indicators ***(Standard)***	—	—	S	S
STD.	**Warning Light & Buzzer — Air Brakes** ***(Standard)***	—	—	S	S
26M500-AC	**Warning Lights & Chime** *(Low oil press., low coolant level, high coolant temp. and high engine oil temp.) (Avail. w/Cat. 3306 eng. Code 30TG00 only; Incl. w/engine warning & shutdown system Code 374H00)*	0	51.00	O	O
	27 — ELECTRICAL				
STD.	**Canadian Daytime Running Lights** ***(Standard in Canada only)***	—	—	S	S
270P00-BK	**Daytime Running Lights** *(N.A. in Canada)*	0	53.00	O	O
	Circuits, Customer Access				
276H00-AB	— Auxiliary Circuits Pkg.	1	51.00	O	O
STD.	— I/ P Fuse Panel Pkg. ***(Standard)***	—	—	S	S
	Access Circuits Box				
27AA80-AB	— Engine Compartment	1	24.00	O	O
27AA70-AB	— Rear of Chassis *(N.A. w/tractor applications)*	1	24.00	O	O
STD.	— Access Circuits Connector *(Engine compt., rear of cab & rear of chassis w/truck applications; Engine compt. & rear of cab only w/tractor applications)* ***(Standard)***	—	—	S	S
276L00-AC	— Switch Pkg., Auxiliary	1	23.00	O	O
	Circuit Protectors				
27AL00-AF	Breakers, Automatic Reset *(In lieu of cab fuses only)*	N/ A	283.00	O	O
STD.	Fuses ***(Standard)***	—	—	S	S
STD.	**Flasher, Emergency** ***(Standard)***	—	—	S	S
27AC00-BB	**Lamps, Turn Signal, Fender Mounted, Supplemental** *(In addition to std.)*	1	59.00	O	O
STD.	**Lamps, Turn Signal & Side Marker Combination & Rear/ Side Facing** *(Hood Mounted)* ***(Standard)***	—	—	S	S
STD.	**Lamps, Turn Signal, Rear/ Side Facing, Hood Mounted** ***(Standard)***	—	—	S	S

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	27 — ELECTRICAL (Continued)				
	Lights, Auxiliary *(Incl. I/P mounted switch) (Mtd. below bumper) (N.A. w/front bumper ext. Code 59HC00 or front frame ext. Code 40GB00)*				
27G800-A7	— Driving Lights *(N.A. w/fog lights Code 27G700)*	5	108.00	O	O
27G700-A7	— Fog Lights *(N.A. w/driving lights Code 27G800)*	5	108.00	O	O
	Lights				
	Cab Marker, 5 Lights *(N.A. w/full aerodynamic pkg. Code 23YG00, roof fairing pkg. Code 23YF00 or cab prep. pkg. Code 23E100)*				
STD.	— ***Standard***	—	—	S	S
274800-AC	— Premium	2	39.00	O	O
STD.	**Head, Two Rectangular Halogen, Dual Beam** *(Incl. stalk mounted switch for dimmer and flash to pass)* ***(Standard)***	—	—	S	S
STD.	**Tail, Two w/ Integral Stop, Turn, Backup, and License Plate** *(Mounted inside frame rails)* ***(Standard)***	—	—	S	S
	Trailer Hook-Up *(Incl. I/P switch w/"On" indicator)*				
273300-AC	— Aimable *(Avail. for tractor in addition to fixed light Code 27AB00 or light included w/unipac tractor pkg. Code 20GE00; N.A. w/sleeper)*	2	31.00	O	O
275J00-AA	— Dual, Recessed *(Avail. w/sleeper only and in addition to the light included in unipac tractor pkg. Code 20GE00)*	2	31.00	O	O
27AB00-A5	— Fixed *(Avail. for truck applications; Incl. w/tractor; N.A. w/sleeper)*	2	33.00	O	O
27AAR0-AB	**Truck-Lite, Rear Lighting System** *(In lieu of std.) (N.A. w/trailer towing pkg. Code 19NH00 or tractor ramp rear crossmember Code 40EX00)*	1	133.00	O	O
	Taillight Mounting				
STD.	— Inside Frame Rails — 21.56″ Spacing *(N.A. w/Truck-Lite Code 27AAR0)* ***(Standard)***	—	—	S	S
275600-AC	— Outside Frame Rails — 46.07″ Spacing *(N.A. w/tractor ramp crossmember Code 40EX00 or Truck-Lite Code 27AAR0 or 51″ Airliner tandem susp. w/60″ AF)*	0	19.00	O	O
276R00-AA	— Rear Crossmember *(N.A. w/truck or w/truck w/trailer pkg. 19NH00, tractor ramp crossmember Code 40EX00 or Truck-Lite Code 27AAR0)*	-3	19.00	O	O
	28 — ALTERNATORS				
	85 amp., 1175 watt				
28CF00-AC	Delco *(26 SI) (1)*	5	215.00	O	O
28CQ00-AA	Leece-Neville *(1)*	21	197.00	O	O
	100 amp., 1400 watt				
28B300-BJ	Delco *(21 SI)*	-8	19.00	O	O
28CS00	Leece-Neville ***(Standard)*** *(1)*	—	—	S	S
	115 amp., 1610 watt				
28B800-AA	Leece-Neville *(1)*	0	37.00	O	O
	130 amp., 1820 watt				
28BL00-AC	Delco *(21 SI)*	-9	111.00	O	O
28CB00-AN	Leece-Neville *(1)*	1	92.00	O	O
	145 amp., 2030 watt				
28BM00-AC	Delco *(21 SI)*	-9	151.00	O	O
28CR00-AA	Leece-Neville *(1)*	1	132.00	O	O

(1) Not available w/Cat. 3306 or 3406 eng.

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	29 — BATTERIES/ BOXES/ CABLES *(Refer to the Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions.)*				
	Battery, Maintenance Free Sterling, 12 Volt				
29AP00	— **Two, 625 CCA** *(93 amp.-hr.) (Incl. w/Cat. C-10, C-12 or 3306 eng.) (N.A. w/Cum. N14+, Cat. 3406 or DDC-60 eng.)* ***(Standard)***	—	—	S	S
29AG00-BW	— **Three, 625 CCA** *(93 amp.-hr.) (Incl. w/N14+, Cat. 3406 or DDC-60 eng.) (Avail. w/Cat. C-10, C-12 or 3306 eng.)*	53	103.00	O	O
	— **Four, 625 CCA** *(93 amp.-hr.) (N.A. w/electronic engines w/clean CA fuel tanks)*				
29AH00-BR	— Avail w/ Cat. C-10, C-12 or Cat. 3306 eng. only	106	261.00	O	O
29AH00-BT	— Avail w/ Cum. N14+, Cat. 3406 or DDC-60 eng. only	53	160.00	O	O
29AJ00-B5	— **Two, 625 CCA** *(96 amp.-hr.) (Cycle Power) (Avail. w/Cum. M11, Cat. C-10, C-12 or 3306 eng.) (N.A. w/Cum. N14+, Cat. 3406 or DDC-60 eng.)*	6	15.00	O	O
	— **Three, 625 CCA** *(96 amp.-hr.) (Cycle Power)*				
29AK00-CA	— Avail w/ Cat. C-10, C-12 or Cat. 3306 eng. only	62	123.00	O	O
29AK00-CB	— Avail w/ Cum. N14+, Cat. 3406 or DDC-60 eng. only	9	21.00	O	O
	— **Four, 625 CCA** *(96 amp.-hr.) (N.A. w/electronic engines w/clean CA fuel tanks)*				
29AL00-BR	— Avail w/ Cat. C-10, C-12 or Cat. 3306 eng. only	118	289.00	O	O
29AL00-BT	— Avail w/ Cum. N14+, Cat. 3406 or DDC-60 eng. only	65	188.00	O	O
	— **Two, 900 CCA** *(96 amp.-hr.)*				
29GM00-BP	— Avail w/ Cat. C-10, C-12 or Cat. 3306 eng. only	6	11.00	O	O
29GM00-BR	— Avail w/ Cum. N14+, Cat. 3406 or DDC-60 eng. only	-47	CR 91.00	O	O
	— **Three, 900 CCA** *(96 amp.-hr.)*				
29GN00-BC	— Avail w/ Cat. C-10, C-12 or Cat. 3306 eng. only	62	113.00	O	O
29GN00-BD	— Avail w/ Cum. N14+, Cat. 3406 or DDC-60 eng. only	9	11.00	O	O
	Battery Box, Frame Mounted				
29KH00-AA	**Aft of Cab, Between Frame Rails** *(Avail. w/tractor only, 166″ thru 208″ wb) (Req. remote battery terminals Code 29KG00 in comb. w/back of cab access pkg. Code 23YA00) (N.A. w/rear mtd. or mixed cap. fuel tanks or sleeper) (N.A. w/14,600 lb., 16,000 lb., 18,000 or 20,000 lb. front axle) (N.A. w/HD trans. w/tandem axles) (N.A. w/severe duty)*	0	67.00	O	O
	Aft of Cab, Outside Frame Rails — Standard Weight				
29KF00-AC	— **L.H.** *(Avail. w/2- or 3-battery system only) (Avail. w/forward mtd. L.H. or R.H. single, or forward mounted dual fuel tanks)*	0	67.00	O	O
29LL00-AA	— **L.H. & R.H.** *(2 batteries each side) (Avail. w/comb. of 4 batteries and forward mounted L.H. or R.H. single or forward mounted dual fuel tanks)*	35	67.00	O	O
	Under Cab, Outside frame Rails, Lightweight — Forward Mounted *(Incl. frame mtd. cab access steps) (Avail. on-hwy. service only)*				
29KD00-AC	— **L.H.** *(Avail. w/2- or 3-battery system) (Avail. w/forward or rear mounted R.H. single, rear mounted L.H. single or rear mounted dual fuel tanks)*	-12	128.00	O	O
29LJ00-AB	— **R.H.** *(Avail. w/2- or 3-battery system only) (Avail. w/forward mounted L.H. single fuel tanks only)*	-12	195.00	O	O
29LK00-AA	— **L.H. & R.H.** *(2 batteries each side) (Avail. w/comb. of 4-battery system and rear mounted fuel tanks only)*	10	323.00	O	O
	Under Cab, Outside Frame Rails, Standard Weight — Forward Mounted *(Incl. frame mtd. cab access steps)*				
29KE00	— **L.H.** *(Avail. w/2- or 3- battery system) (Avail. w/forward or rear mounted R.H. single, rear mounted L.H. single or rear mounted dual fuel tanks)* ***(Standard)***	—	—	S	S
29KE00-AA	— **L.H.** *(Avail. w/4-battery system) (Avail. w/forward mounted R.H. single fuel tanks only)*	12	215.00	O	O
29LG00-AB	— **R.H.** *(Avail. w/2- or 3-battery system) (Avail. w/forward mounted L.H. single fuel tanks only)*	0	67.00	O	O
29LG00-AE	— **R.H.** *(Avail. w/4-battery system) (Avail. w/forward mounted L.H. single fuel tanks only)*	12	283.00	O	O
29LH00-AA	— **L.H. & R.H.** *(2 batteries each side) (Avail. w/comb. of 4-battery system and rear mounted fuel tanks only)*	35	67.00	O	O
29KG00-AC	**Battery Terminals, Remote** *(Jump start studs) (N.A. w/R.H. mounted 4-battery/1 box system)*	0	25.00	O	O

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	30 — ENGINES				
	(Engine listings show Advertised Horsepower/Advertised Torque/Governed RPM; For specific ratings and performance curves, see Eng. Section of the Comp. Info. Data Book; See Safety-Noise-Emission Section of Component Book)				
	CATERPILLAR C-10 *(ELECTRONIC)* DIESEL *(Incl. Speed/Cruise control which may be deleted)*				
300700-AA	— 305 HP/ 1050 lb.-ft./ 2100 RPM	0	NC	O	O
30X000	— 305 HP/ 1150 lb.-ft./ 1800 RPM ***(Standard)***	—	—	S	S
30X100-AA	— 305 HP/ 1150 lb.-ft./ 2100 RPM	0	NC	O	O
30X300-AA	— 335 HP/ 1250 lb.-ft./ 1800 RPM *(10)*	15	1685.00	O	O
300800-AA	— 335 HP/ 1250 lb.-ft./ 2100 RPM *(10)*	15	1685.00	O	O
30X400-AA	— 335 HP/ 1350 lb.-ft./ 1800 RPM *(10)*	15	1685.00	O	O
30X500-AA	— 350 HP/ 1350 lb.-ft./ 1800 RPM *(10)*	15	2125.00	O	O
30X600-AA	— 370 HP/ 1350 lb.-ft./ 1800 RPM *(10)*	15	2125.00	O	O
	CATERPILLAR C-10-MT *(MULTI-TORQUE)* DIESEL *(Incl. Speed/Cruise control which may be deleted) (N.A. w/automatic trans.)*				
30X700-AA	— 335-370 HP/ 1250-1350 lb.-ft./ 1800 RPM *(10)*	15	1685.00	O	O
	CATERPILLAR C-12 *(ELECTRONIC)* DIESEL *(Incl. Speed/Cruise control which may be deleted)*				
300900-AA	— 335 HP/ 1550 lb.-ft./ 2100 RPM *(6) (10)*	89	2345.00		O
30XM00-AA	— 355 HP/ 1350 lb.-ft./ 1800 RPM *(10)*	36	2345.00	O	O
301E00-AA	— 355 HP/ 1350 lb.-ft./ 2100 RPM *(10)*	N/ A	2345.00	O	O
30XP00-AA	— 380 HP/ 1450 lb.-ft./ 1800 RPM *(6) (10)*	89	2807.00	O	O
301D00-AA	— 380 HP/ 1450 lb.-ft./ 2100 RPM *(6) (10)*	89	2807.00	O	O
301C00-AA	— 395 HP/ 1450 lb.-ft./ 1800 RPM *(6) (10)*	89	2807.00	O	O
301B00-AA	— 395 HP/ 1450 lb.-ft./ 2100 RPM *(6) (10)*	89	2807.00	O	O
30XR00-AA	— 410 HP/ 1450 lb.-ft./ 1800 RPM *(6) (9) (10)*	89	3911.00	O	O
301A00-AA	— 410 HP/ 1450 lb.-ft./ 2100 RPM *(6) (9) (10)*	89	3911.00	O	O
30XS00-AA	— 410 HP/ 1550 lb.-ft./ 1800 RPM *(6) (9) (10)*	89	3908.00		O
30XT00-AA	— 410 HP/ 1550 lb.-ft./ 2100 RPM *(6) (9) (10)*	89	3911.00		O
	CATERPILLAR C-12-MT *(MULTI-TORQUE)* DIESEL *(Incl. Speed/Cruise control which may be deleted) (N.A. w/automatic trans)*				
30XU00-AA	— 355-410 HP/ 1350-1450 lb.-ft./ 1800 RPM *(6) (9) (10)*	89	2492.00	O	O
30XV00-AA	— 355-410 HP/ 1350-1550 lb.-ft./ 1800 RPM *(6) (9) (10)*	89	2495.00		O
30XW00-AA	— 380-410 HP/ 1450-1550 lb.-ft./ 1800 RPM *(6) (9) (10)*	89	2807.00		O
	CATERPILLAR 3306C *(MECHANICAL)* DIESEL *(Incl. intake air heater; Engine mtd. fuel filter Cat. 1P22; Engine mtd. oil filter Cat. IR0658, by-pass built into oil filter base, 3 qts.) (Deletes std. fuel cooler) (Does not incl. Speed/Cruise control) (Req. serviceability enhanced oil fill and dipstick Code 373900) (N.A. w/sleeper or alum. cab) (Req. Warning Lights and Chime Code 26M500)*				
30TG00-AJ	— 300 HP/ 1150 lb.-ft./ 1900 RPM	-37	CR 2620.00	O	O
	CATERPILLAR 3406C *(MECHANICAL)* DIESEL *(N.A. for Calif.)* *(Incl. intake air heater; Engine mtd. fuel filter Fleetguard FF207; Engine mtd. oil filter Cat. IR0716 w/by-pass built into oil filter base, 4 qts.; Mechanical governor; Eng warning and shutdown system Code 374H00 & Three 625CCA 93AH batteries Code 29AG00) (Req. Horton fan clutch Code 37FP00; Farr air cleaner Code 373R00; Service enhanced oil fill & dipstick Code 373900; Min. 100 amp. Delco alternator Code 28B300) (Deletes std. fuel cooler) (Does not incl. speed/cruise control) (N.A. w/sleeper, alum. cab or automatic trans.)*				
301G00-AA	— 350 HP/ 1450 lb.-ft./ 1800 RPM *(6) (10)*	1024	2771.00	O	O
301H00-AA	— 425 HP/ 1650 lb.-ft./ 1900 RPM *(6) (9) (10)*	1024	4392.00		O

(6) Incl. 15-1/2″, 2-plate ceramic (7-spring/3600 lb.) manual adjust 1650 lb.-ft. clutch, Code 36FC00.
(9) Req. trans. oil cooler w/Fuller trans.
(10) Incl. 1050 sq. in. engine cooling module.

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	30 — ENGINES (Continued)				
	CATERPILLAR 3406E *(ELECTRONIC)* DIESEL *(Avail. for All States)* *(Incl. Speed/Cruise control which may be deleted; Engine mtd. oil filter Cat. IR0716, by-pass built into oil filter base, 4 qts. & fuel cooler; Three 625 CCA 93 AH batteries Code 29AG00)*				
30PT00-AR	— 355 HP/ 1350 lb.-ft./ 1800 RPM *(10) (12)*	911	3104.00	O	O
300V00-AA	— 355 HP/ 1350 lb.-ft./ 2100 RPM *(10)*	911	3104.00	O	O
30PV00-AR	— 375 HP/ 1450 lb.-ft./ 1800 RPM *(6) (10)*	964	4413.00	O	O
300W00-AA	— 375 HP/ 1450 lb.-ft./ 2100 RPM *(6) (10)*	964	4413.00	O	O
30RR00-AH	— 435 HP/ 1550 lb.-ft./ 1800 RPM *(6) (9) (10)*	964	4463.00		O
30YR00-AA	— 435 HP/ 1550 lb.-ft./ 2100 RPM *(6) (9) (10)*	964	4463.00		O
30PX00-AH	— 435 HP/ 1650 lb.-ft./ 1800 RPM *(6) (9) (10)*	964	4463.00		O
30YS00-AA	— 435 HP/ 1650 lb.-ft./ 2100 RPM *(6) (9) (10)*	964	4463.00		O
30TK00-AG	— 455 HP/ 1650 lb.-ft./ 1800 RPM *(6) (9) (10)*	964	5459.00		O
30YT00-AA	— 455 HP/ 1650 lb.-ft./ 2100 RPM *(6) (9) (10)*	964	5459.00		O
30PY00-AK	— 475 HP/ 1650 lb.-ft./ 1800 RPM *(6) (9) (10)*	964	5985.00		O
30YU00-AA	— 475 HP/ 1650 lb.-ft./ 2100 RPM *(6) (9) (10)*	964	5985.00		O
	CATERPILLAR 3406E MT *(MULTI-TORQUE)* DIESEL *(Incl. Speed/Cruise control which may be deleted; Engine mtd. oil filter Cat. IR0716, by-pass built into oil filter base, 4 qts. & fuel cooler; Three 625 CCA 93 AH batteries Code 29AG00) (N.A. w/automatic trans.)*				
30P000-AR	— 355-380 HP/ 1350-1450 lb.-ft./ 1800 RPM *(6) (10)*	964	3252.00	O	O
30RP00-AH	— 375-403 HP/ 1450-1550 lb.-ft./ 1800 RPM *(6) (9) (10)*	964	4624.00		O
30YV00-AA	— 375-435 HP/ 1450-1550 lb.-ft./ 1800 RPM *(6) (9) (10)*	964	4624.00		O
300200-AA	— 375-435 HP/ 1450-1650 lb.-ft./ 1800 RPM *(6) (9) (10)*	964	4624.00		O
	CUMMINS N14E PLUS *(CELECT)* DIESEL *(Incl. Holset QE296 13.2 CFM air compressor; Speed/Cruise control which may be deleted; Frame mtd. fuel filter Fleetguard FS-1212; Eng. mtd. oil filter, full flow & by-pass, Cummins LF-3000, 3.2 qts.; Fuel cooler; Three 625 CCA 93 AH batteries)*				
30WE00-AR	— N14-350E+ — 350 HP/ 1400 lb.-ft./ 1800 RPM *(7) (10)*	858	4445.00	O	
30WE00-AT	— 350 HP/ 1400 lb.-ft./ 1800 RPM *(10)*	823	4445.00		O
30WF00-AR	— 350 HP/ 1400 lb.-ft./ 2100 RPM *(7) (10)*	858	4685.00	O	
30WF00-AT	— 350 HP/ 1400 lb.-ft./ 2100 RPM *(10)*	823	4685.00		O
30WG00-AP	— N14-370E+ — 370 HP/ 1400 lb.-ft./ 1800 RPM *(7) (10)*	858	4445.00	O	
30WG00-AT	— 370 HP/ 1400 lb.-ft./ 1800 RPM *(10)*	823	4445.00		O
30WH00-AP	— 370 HP/ 1400 lb.-ft./ 2100 RPM *(7) (10)*	858	4685.00	O	
30WH00-AT	— 370 HP/ 1400 lb.-ft./ 2100 RPM *(10)*	823	4685.00		O
30WJ00-AP	— 370 HP/ 1450 lb.-ft./ 1800 RPM *(6) (10)*	876	4559.00	O	O
30WK00-AP	— 370 HP/ 1450 lb.-ft./ 2100 RPM *(6) (10)*	876	4800.00	O	O
30WL00-AP	— N14-410E+ — 410 HP/ 1450 lb.-ft./ 1800 RPM *(6) (9) (10)*	876	6280.00	O	O
30WM00-AP	— 410 HP/ 1450 lb.-ft./ 2100 RPM *(6) (9) (10)*	876	6521.00	O	O
30WN00-AP	— N14-435E+ — 435 HP/ 1450 lb.-ft./ 1800 RPM *(6) (9) (10)*	876	6280.00	O	O
30WP00-AP	— 435 HP/ 1450 lb.-ft./ 2100 RPM *(6) (9) (10)*	876	6521.00	O	O
30WQ00-AB	— 435 HP/ 1550 lb.-ft./ 1800 RPM *(6) (9) (10)*	876	6280.00		O
30WR00-AB	— 435 HP/ 1550 lb.-ft./ 2100 RPM *(6) (9) (10)*	876	6521.00		O
30YQ00-AA	— 435 HP/ 1650 lb.-ft./ 2100 RPM *(6) (9) (10)*	N/ A	6521.00		O
30WS00-AB	— N14-460E+ — 460 HP/ 1550 lb.-ft./ 2100 RPM *(6) (9) (10)*	876	6521.00		O
30WT00-AB	— 460 HP/ 1650 lb.-ft./ 2100 RPM *(6) (9) (10)*	876	6521.00		O

(6) Incl. 15-1/2″, 2-plate ceramic (7-spring/3600 lb.) manual adjust 1650 lb.-ft. clutch, Code 36FC00.
(9) Req. trans. oil cooler w/Fuller trans.
(10) Incl. 1050 sq. in. engine cooling module.
(12) N.A. w/auto. trans.

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	30 — ENGINES (Continued)				
	CUMMINS N14-ESP PLUS *(CELECT)* DIESEL *(Incl. Holset QE296 13.2 CFM air compressor; Speed/Cruise control which may be deleted; Frame mtd. fuel filter Fleetguard FS-1212; Engine mtd. oil filter; Full-flow & by-pass, Cummins LF-3000, 3.2 qts.; Fuel cooler; Three 625 CCA 93AH batteries) (N.A. w/automatic trans.)*				
30WW00-AB	— N14-ESP+ — 370-435 HP/ 1450-1550 lb.-ft./ 1800 RPM *(6) (9) (10)*	876	4639.00		0
	DETROIT DIESEL SERIES 60 11.1L *(Incl. Speed/Cruise control which may be deleted; Coolant conditioner filter Nalcool 3000 spin-on type; Engine mtd. fuel filter AC-T915D primary filter, AC-TP916D secondary filter; Eng. mtd. oil filter DDC AC PF-2100 full-flow, 6 qts. & fuel cooler; by-pass not req.; Three 625 CCA 93 AH batteries Code 29AG00)*				
30T100-AL	**— 11.1L** — 330 HP/ 1250 lb.-ft./ 1800 RPM *(10)*	796	1723.00	0	0
30T300-AL	— 330 HP/ 1250 lb.-ft./ 2100 RPM *(10)*	796	1869.00	0	0
30T200-AL	— 330 HP/ 1350 lb.-ft./ 1800 RPM *(10)*	796	1723.00	0	0
30T400-AL	— 330 HP/ 1350 lb.-ft./ 2100 RPM *(10)*	796	1869.00	0	0
30GG00-AL	— 350 HP/ 1250 lb.-ft./ 1800 RPM *(10)*	796	1723.00	0	0
30MG00-AL	— 350 HP/ 1350 lb.-ft./ 1800 RPM *(10)*	796	1723.00	0	0
30MH00-AL	— 365 HP/ 1350 lb.-ft./ 1800 RPM *(10)*	796	1723.00	0	0
	— 11.1L Cruise Power *(N.A. w/automatic trans.)*				
30VG00-AL	— 330-350 HP/ 1250 lb.-ft./ 1800 RPM *(10)*	796	1723.00	0	0
	DETROIT DIESEL SERIES 60 12.7L *(Incl. Speed/Cruise control which may be deleted; Nalcool coolant conditioner filter 3000 spin-on type; Engine mtd. fuel filter AC-T915D primary filter, AC-TP916D secondary filter; Eng. mtd. oil filter DDC AC PF-2100 full-flow, 6 qts. & fuel cooler; Three 625 CCA 93 AH batteries Code 29AG00)*				
30RF00-AF	**— 12.7L** — 370 HP/ 1450 lb.-ft./ 1800 RPM *(6) (10)*	919	4989.00	0	0
30RE00-AF	— 370 HP/ 1450 lb.-ft./ 2100 RPM *(6) (10)*	919	5135.00	0	0
30XF00-AF	— 370 HP/ 1550 lb.-ft./ 1800 RPM *(6) (10)*	919	4989.00		0
30H800-AF	— 400 HP/ 1450 lb.-ft./ 1800 RPM *(6) (9) (10)*	919	4991.00	0	0
30H900-AF	— 400 HP/ 1450 lb.-ft./ 2100 RPM *(6) (9) (10)*	919	5135.00	0	0
30XG00-AF	— 400 HP/ 1550 lb.-ft./ 1800 RPM *(6) (9) (10)*	919	4989.00		0
30MJ00-AF	— 430 HP/ 1450 lb.-ft./ 1800 RPM *(6) (9) (10)*	919	4989.00	0	0
30MK00-AF	— 430 HP/ 1450 lb.-ft./ 2100 RPM *(6) (9) (10)*	919	5135.00	0	0
30RM00-AF	— 430 HP/ 1550 lb.-ft./ 1800 RPM *(6) (9) (10)*	919	4989.00		0
30R000-AF	— 430 HP/ 1550 lb.-ft./ 2100 RPM *(6) (9) (10)*	919	5135.00		0
	— 12.7L Cruise Power *(N.A. w/automatic trans.)*				
30RL00-AF	— 370-430 HP/ 1450 lb.-ft./ 1800 RPM *(6) (9) (10)*	919	4987.00	0	0
30RK00-AF	— 370-430 HP/ 1450 lb.-ft./ 2100 RPM *(6) (9) (10)*	919	5135.00	0	0

(6) Incl. 15-1/2″, 2-plate ceramic (7-spring/3600 lb.) manual adjust 1650 lb.-ft. clutch, Code 36FC00.
(9) Req. trans. oil cooler w/Fuller trans.
(10) Incl. 1050 sq. in engine cooling module.

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	32 — EXHAUST SYSTEM *(``General Restrictions'' for exhaust systems apply to both non-sleeper and sleeper models. Specific sleeper restrictions are shown where applicable. Refer to pages 1 & 2 for Sleeper/ WB restrictions.) (Refer to Exhaust Restriction charts in the Appendix at the end of this model for additional restrictions.) (See Component Book for installation sketches)*				
32FD00-AB	**SINGLE HORIZONTAL MUFFLER AND HORIZONTAL OUTLET, R.H.** *(N.A. w/Cat. 3406C eng.)*	5	CR 201.00	0	0
	SINGLE HORIZONTAL MUFFLER WITH STRAIGHT VERTICAL OUTLET STACK, R.H. **CAB MOUNTED, R.H.** *(Incl. exhaust heat shield) (N.A. w/sleeper or alum. cab)* **— Over Frame — Cab Mtd.** *(N.A. w/cab air susp. Code 23A500, full aero pkg. Code 23YG00, cab side extenders Code 231F00, aero reinforcements only pkg. Code 23E100 or flywheel PTO Code 37EF00)*				
32FE00-AC	**— Plain Outlet**	73	260.00	0	0
32FG00-AC	**— Bright Outlet**	75	321.00	0	0
	— Under Frame — Cab Mtd. *(Avail. w/L.H. fuel tanks only) (N.A. w/cab air susp. Code 23A500, full aero pkg. Code 23YG00, cab side extenders Code 231F00 or aero reinforcements only pkg. Code 23E100)*				
32FF00-AC	**— Plain Outlet**	71	260.00	0	0
32FH00-AC	**— Bright Outlet**	73	321.00	0	0
	FRAME MOUNTED, R.H. **— Over Frame — Frame Mtd.** *(N.A. w/sleeper) (N.A. w/flywheel PTO Code 37EF00)*				
	— Use without full aero pkg. Code 23YG00 or cab side extenders Code 231F00; Also use with aero prep. pkg. Code 23E100. *(Incl exhaust heat shield)*				
32FJ00-AC	**— Plain Outlet**	85	451.00	0	0
32FL00-AC	**— Bright Outlet**	87	511.00	0	0
	— Use with full aero pkg. Code 23YG00, cab side extenders Code 231F00 *(Exhaust heat shield deleted)*				
32FJ00-AF	**— Plain Outlet**	80	451.00	0	0
32FL00-AF	**— Bright Outlet**	82	511.00	0	0
	— Under Frame — Frame Mtd. *(Avail. w/L.H. fuel tanks only exc. w/sleeper)*				
	— Use without full aero pkg. Code 23YG00, cab side extenders Code 231F00 or sleeper trim pkg. Code 21W600; Also use with aero prep. pkg. Code 23E100. *(Incl. exhaust heat shield)*				
32FK00-AC	**— Plain Outlet**	110	451.00	0	0
32FM00-AC	**— Bright Outlet**	112	511.00	0	0
	— Use with full aero pkg. Code 23YG00, cab side extenders Code 231F00 or sleeper trim pkg. Code 21W600 *(Exhaust heat shield deleted)*				
32FK00-AG	**— Plain Outlet**	105	451.00	0	0
32FM00-AG	**— Bright Outlet**	107	511.00	0	0
	SINGLE HORIZONTAL MUFFLER, R.H. WITH DUAL BRIGHT STRAIGHT VERTICAL OUTLET STACKS *(N.A. w/between rails battery box Code 29KH00 or trailer towing pkg. Code 19NH00) (N.A. w/Cat. 3406C eng.)* **CAB MOUNTED** *(Incl. exhaust heat shield) (N.A. w/sleeper or alum. cab)*				
32F100-AB	**— Over Frame w/ Bright Outlets — Cab Mtd.** *(N.A. w/cab air susp. Code 23A500, full aero pkg. Code 23YG00, cab side extenders pkg. Code 231F00, aero reinforcements only pkg. Code 23E100, or flywheel PTO Code 37EF00) (Req. unipac tractor pkg. Code 20GE00 for tractor applications) (N.A. w/trailer towing pkg. Code 19NH00)*	85	359.00	0	0

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	32 — EXHAUST SYSTEM *(``General Restrictions" for exhaust systems apply to both non-sleeper and sleeper models. Specific sleeper restrictions are shown where applicable. Refer to pages 1 & 2 for Sleeper/ WB restrictions.) (Refer jto Exhaust Restriction charts in the Appendix at the end of this model for additional restrictions.) (See Component Book for installation sketches)* **(Continued)**				
	SINGLE HORIZONTAL MUFFLER, R.H. WITH DUAL BRIGHT STRAIGHT VERTICAL OUTLET STACKS *(N.A. w/between rails battery box Code 29KH00 or trailer towing pkg. Code 19NH00) (N.A. w/Cat. 3406C eng.)* **(Continued)**				
	FRAME MOUNTED				
	— Over Frame w/ Bright Outlets — Frame Mtd. *(N.A. w/sleeper) (N.A. w/flywheel PTO Code 37EF00) (Req. unipac tractor pkg. Code 20GE00 for tractor applications) (N.A. w/trailer towing pkg. Code 19NH00)*				
32F200-AB	— Use without full aero pkg. Code 23YG00 or cab side extenders pkg. Code 231F00; Also use with aero prep. pkg. Code 23E100; Also use with full aero pkg. Code 23YG00 or cab side extenders Code 231F00 when either is ordered with back-of-cab access pkg. Code 23YA00. *(Incl. exhaust heat shield)*	210	359.00	O	O
32F200-AF	— Use with full aero pkg. Code 23YG00 or cab side extenders pkg. Code 231F00 unless either is ordered with back-of-cab access pkg. Code 23YA00) *(Exhaust heat shield deleted)*	205	359.00	O	O
	DUAL HORIZONTAL MUFFLERS WITH DUAL BRIGHT STRAIGHT VERTICAL OUTLET STACKS *(Avail. w/sleeper only) (Req. optional air reservoir tank w/tandem axle models) (N.A. w/auto. trans. w/Cat. 3406C, 3406E, Cum. N14+ or DDC-60 engs.) (Req. unipac tractor pkg. Code 20GE00 for tractor applications)*				
	FRAME MOUNTED				
	— Under Frame — Frame Mtd.				
32F300-AA	— Use without full aero pkg. Code 23YG00 or sleeper trim pkg. Code 21W600; Also use with aero prep. pkg. Code 23E100; Also use with full aero pkg. Code 23YG00 or sleeper trim pkg. Code 21W600 when any of them is ordered with back-of-cab access pkg. Code 23YA00 *(Incl. exhaust heat shields)*	259	832.00	O	O
32F300-AD	— Use with full aero pkg. Code 23YG00 or sleeper trim pkg. Code 21W600 unless either is ordered with back-of-cab access pkg. Code 23YA00. *(Exhaust heat shields deleted)*	259	832.00	O	O
	SINGLE VERTICAL MUFFLER WITH STRAIGHT VERTICAL OUTLET STACKS, R.H.				
	CAB MOUNTED, R.H. *(N.A. w/R.H. clean CA fuel tanks, sleeper or alum. cab)*				
	— Use without full aero pkg. Code 23YG00 or cab side extenders Code 231F00; Use with cab aero prep. pkg. Code 23E100 *(Incl. exhaust heat shield)*				
32FW00	**— Plain Outlet *(Standard)***	—	—	S	S
32FX00-AC	**— Bright Outlet** *(Incl. bright heatshield & pipe)*	2	171.00	O	O
	— Use with full aero pkg. Code 23YG00 or cab side extenders Code 231F00. *(Exhaust heat shield deleted)*				
32FW00-AH	**— Plain Outlet**	-5	99.00	O	O
32FX00-AK	**— Bright Outlet**	-3	269.00	O	O
	FRAME MOUNTED, R.H. *(N.A. w/sleeper) (N.A. w/R.H. clean CA fuel tanks)*				
	— Use without full aero pkg. Code 23YG00 or cab side extenders Code 231F00; Use with cab aero prep. pkg. Code 23E100. *(Incl. exhaust heat shield)*				
32FY00-AC	**— Plain Outlet**	25	99.00	O	O
32F000-AC	**— Bright Outlet** *(Incl. bright pipe)*	27	269.00	O	O
	— Use with full aero pkg. Code 23YG00 or cab side extenders Code 231F00 *(Exhaust heat shield deleted)*				
32FY00-AG	**— Plain Outlet**	20	99.00	O	O
32F000-AF	**— Bright Outlet** *(Incl. bright pipe)*	22	269.00	O	O
32FN00-AB	**SINGLE TRANSVERSE HORIZONTAL MUFFLER & HORIZONTAL OUTLET, R.H.** *(Muffler mounted under & outside frame rail, R.H.) (N.A. w/Cat. 3406C eng.)*	108	CR 71.00	O	O

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	32 — EXHAUST SYSTEM *(``General Restrictions" for exhaust systems apply to both non-sleeper and sleeper models. Specific sleeper restrictions are shown where applicable. Refer to pages 1 & 2 for Sleeper/ WB restrictions.) (Refer jto Exhaust Restriction charts in the Appendix at the end of this model for additional restrictions.) (See Component Book for installation sketches)* **(Continued)**				
	SINGLE TRANSVERSE HORIZONTAL MUFFLER WITH STRAIGHT VERTICAL OUTLET STACK, R.H. **CAB MOUNTED** *(N.A. w/cab air susp. Code 23A500, full aero pkg. Code 23YG00, cab side extenders Code 231F00 or aero reinforcements only Code 23E100)*				
32FP00-AB	— **Plain Outlet**	89	103.00	O	O
32FR00-AB	— **Bright Outlet**	91	163.00	O	O
	33 — EXHAUST EQUIPMENT				
	Rain Cap, Bright *(N.A. w/turn-out elbow Code 33BT00)*				
33BR00-AJ	— Avail. w/ Dual Vertical Exhaust Outlet Only	6	37.00	O	O
33BR00-AN	— Avail. w/ Single Vertical Exhaust Outlet Only	3	19.00	O	O
STD.	**Straight Vertical Stack End** *(Incl. w/all vertical outlets) (Plain w/plain exh. & bright w/bright exh.)* ***(Standard)***	—	—	S	S
	Turn-Out Elbow *(In lieu of straight vertical exhaust outlet stack only; N.A. w/rain cap. Code 33BR00) (Plain w/plain exh. & bright w/bright exh.)*				
33BT00-AB	— Avail. w/ Dual Vertical Exhaust Outlet only	4	101.00	O	O
33BT00-AE	— Avail. w/ Single Vertical Exhaust Outlet only	2	51.00	O	O
	36 — CLUTCHES				
	Clutch, Eaton-Spicer **14″ SD, 2-plate Ceramic** ***(8-Spring/ 3200lb.)*** **Manual Adjust.** *(1400 lb.-ft. cap.)*				
36A700	— For Cat. C-10, C-10 MT, C-12, 3306, 3406 or DDC-60 11.1L *(Up thru 1400 lb.-ft.)* eng. ***(Standard)***	—	—	S	S
36A700	— For Cum. N14+ *(Up thru 1400 lb.-ft.)* eng. ***(Standard)***	—	—		S
	15-1/ 2″, 2-plate Ceramic ***(8-Spring/ 3200lb.)*** **Manual Adjust.** *(1400 lb.-ft. cap.)*				
36DK00-A0	— For Cat. C-10, C-10 MT, C-12, 3306 or DDC-60 11.1L *(Up thru 1400 lb.-ft.)* eng.	28	91.00	O	O
36DK00-A1	— For Cum. N14+ *(Up thru 1400 lb.-ft)* eng.	28	91.00		O
	15-1/ 2″, 2-plate Ceramic ***(7-Spring/ 3200lb.)*** **Manual Adjust.** *(1450 lb.-ft. cap.) (Incl. w/Cum. N14+ 4x2 (up thru 1400 lb.-ft.) eng.)*				
36DD00-C2	— For Cat. C-10, C-10 MT, C-12, 3406 or DDC-60 11.1L *(Up thru 1400 lb.-ft.)* eng.	35	143.00	O	O
	15-1/ 2″, 2-plate Ceramic ***(7-Spring/ 3600lb.)*** **Manual Adjust.** *(1650 lb.-ft. cap.) (Incl. w/Cat. C-12, C-12 MT, 3406, 3406 MT, Cum. N14+, N14+ ESP and DDC-60 12.7L (1401 thru 1650 lb.-ft.) eng.)*				
36FC00-AA	— For DDC-60 11.1L *(Up thru 1400 lb.-ft.)* eng.	53	156.00	O	O
36FC00-BA	— For Cum. N14+ *(Up thru 1400 lb.-ft)* eng.	18	13.00	O	
36FC00-BC	— For Cum. N14+ *(Up thru 1400 lb.-ft.)* eng.	18	156.00		O
	15-1/ 2″, 2-plate Ceramic ***(7-Spring/ 3600lb.)*** **Spicer "Solo" Adjustment Free** *(1650 lb.-ft. cap.)*				
36FG00-AA	— For DDC-60 11.1L *(Up thru 1400 lb.-ft.)* eng.	49	300.00	O	O
36FG00-AG	— For Cum. N14+ *(Up thru 1400 lb.-ft)* eng.	14	157.00	O	
36FG00-AE	— For Cum. N14+ *(Up thru 1400 lb.-ft.)* eng.	14	300.00		O
36FG00-AC	— For Cat. C-12, C-12 MT, 3406, 3406 MT, Cum.N14+, N14+ ESP or DDC-60 12.7L *(1401 thru 1650 lb.-ft.)* eng.	49	157.00	O	O
36AA00-AN	**Clutch Housing, Aluminum** *(Avail. for on-hwy. service only)*	-53	20.00	O	O
STD.	**Clutch Housing, Cast Iron** ***(Standard)***	—	—	S	S
36CC00-AD	**Remote Lube Fitting — Clutch Throw-out Bearing**	0	12.00	O	O

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	37 — ENGINE EQUIPMENT				
	Air Cleaner				
	Donaldson, Dual element, Two Stage *(N.A. w/alum. cab or Cat. 3406C eng.)*				
373P00-AB	— Use w/ all engines except Cat. 3306	16	75.00	O	O
373P00-AC	— Use w/ Cat. 3306 eng. only	13	75.00	O	O
	Donaldson, High Capacity, Single Stage *(N.A. w/Cat. 3406C eng.)*				
375X00-AC	— Use w/ Cat. 3406E, Cum. N14+ or DDC-60 eng. only	13	223.00	O	O
375X00-AE	— Use w/ Cat. C-10, C-12 & 3306 eng. only	3	223.00	O	O
STD.	**Donaldson, Single Stage** ***(Standard)***	—	—	S	S
	Farr ECO-II, Single Stage, Disposable				
373R00-AC	— Use w/ all engines	2	255.00	O	O
	Air Intake, Source — Engine				
373T00-AB	Inside/ Outside Air *(Incl. in-cab controls) (Avail. w/truck only) (N.A. w/tandem axle in comb. w/main locking differential Code 13AW00 and air susp. dump valve Code 48AC00)*	12	477.00	O	O
STD.	Outside Air ***(Standard)***	—	—	S	S
37AY00-AR	**Block Heater, 110 Volt — Single 1500 Watt Phillips** *(Incl. front-mounted cord and receptacle)*	1	72.00	O	O
	Block Heater Receptacle				
373W00-AC	Under Driver Door Mounted *(Avail. w/block heater option Code 37AY00 in lieu of front-mounted cord)*	1	51.00	O	O
373X00-AC	**Dirt Filter/ Bug Screen, Grille Mounted**	2	53.00	O	O
	Engine Brake *(Incl. I/P mounted switches)*				
	"C Brake by Jacobs"				
376700-AG	— Use with Cummins N14+ eng. only	85	1848.00	O	O
	Jake Brakes — Jacobs				
374T00-AA	Model 310A *(Avail. w/Cat. C-10 eng. only)*	75	1825.00	O	O
377H00-AA	Model 312A *(Avail. w/Cat. C-12 eng. only)*	70	1825.00	O	O
374V00-AA	Model 336A *(Avail. w/Cat. 3306 eng. Code 30TG00 only)*	72	1825.00	O	O
37C000-C4	Model 346D *(Avail. w/Cat. 3406C mechanical eng. only)*	75	1741.00	O	O
376W00-AA	Model 340A *(Avail. w/Cat. 3406E electronic eng. only)*	70	1825.00	O	O
374000-AA	Model 760A *(Avail. w/DDC-60 11.1L eng. only) (N.A. w/pressure governor system Code 371W00)*	89	1775.00	O	O
374100-AA	Model 765A *(Avail. w/DDC-60 12.7L eng. only) (N.A. w/pressure governor system Code 371W00)*	89	1775.00	O	O
	Engine Mounts				
373000	— **Compression Type** ***(Standard)***	—	—	S	S
373100-AB	— **Focal Mounts** *(Avail. on-hwy. only) (N.A. w/14,600 lb. Front Axle Code 10A200, 16,000 lb. Front Axle Code 10AF00, 18,000 lb. Front Axle Code 10AD00 or 20,000 lb. Front Axle Code 10AH00) (N.A. w/Cat. 3406C eng.)*	11	119.00	O	O
STD.	**Engine Shutoff** *(Solenoid)* — Ignition Key ***(Standard)***	—	—	S	S
	Fan Clutch *(Automatic Cycling)*				
373400-AA	— **Eaton — Viscous** *(Avail. w/Cat. C-10 & C-12, Cat. 3406E to & incl. 455 HP, Cum. N14+ eng.) (N.A. w/Cat. 3306, 3406C or DDC-60 eng.) (N.A. w/engines over 1900 RPM)*	1	CR 36.00	O	O
37FP00-AA	— **Horton "On-Off"** *(N.A. w/Cat. 3306 eng.)*	0	97.00	O	O
373600	— **Kysor "On-Off"** *(N.A. w/Cat. 3406C eng.)* ***(Standard)***	—	—	S	S
374N00-AB	**Fan Clutch Override** *(Avail. w/"On-Off" fan clutch only; Incl. I/P mounted switch)*	0	71.00	O	O
373800-AC	**Hose Pkg., Silicone** *(Incl. radiator, heater, engine drawdown hoses and torque controlled clamps)*	0	147.00	O	O
STD.	**Hose, Radiator, EPDM Rubber** *(Incl. torque controlled clamps)* ***(Standard)***	—	—	S	S

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	37 — ENGINE EQUIPMENT (Continued)				
373900-AC	**Oil Fill & Dipstick, Serviceability Enhanced**	1	44.00	O	O
STD.	**Oil Fill System, Standard Oil Fill & Check** *(Standard)*	—	—	S	S
374D00-AB	**Power Take-Off, Crankshaft Driven Damper** — For use with electronic eng. w/ Speed/ Cruise Control or with mechanical engine	12	251.00	O	O
374D00-AC	— For use with Speed/ Cruise Control Delete Code 37LG00 *(Incl. steering wheel mtd. switches w/electronic eng.)*	12	285.00	O	O
37EF00-AB	**Power Take-Off, Flywheel Driven** *(Avail. w/Cat. C-10, C-12, Cat. 3306 eng. only; Avail. w/manual trans. only; Avail. w/truck only) (N.A. w/cab rear air susp. Code 23A500)*	154	2719.00	O	O
374B00-AC	**Radiator, Clog Resistant** *(For dirty environment) (1050 sq. in. engine cooling module) (Avail. w/eng. from 306 HP thru 310 HP w/man. trans. only) (Requires on-off fan clutch) (N.A. w/Cat. 3306 eng., Cat. 3406C eng. or extra cooling Code 37AN00)*	16	39.00	O	O
37AN00-AR	**Radiator, Cooling, Extra — 1050 sq. in. module** *(Avail. w/eng. up thru 305 HP max.) (N.A. w/clog resistant radiator Code 374B00 or Cat. 3306 eng.)*	15	159.00	O	O
STD.	**Radiator, Cooling Nominal** — 900 sq. in. cooling module *(N.A. w/Cat. 3406C eng.)* ***(Standard)***	—	—	S	S
STD.	**Speed/ Cruise Control** *(With electronic engines only)* ***(Standard)***	—	—	S	S
37LG00-AV	**Speed/ Cruise Control Delete** *(Avail. w/electronic engines only)*	-5	CR 72.00	O	O
374F00-AC	**Starting Aid, Cold Weather Ether Air Intake — Automatic** *(Does not incl. ether tank; N.A. w/Cat. 3306C engine Code 30TG00 or Cat. 3406C eng.)*	7	87.00	O	O
STD.	**Starter, Electric** ***(Standard)***	—	—	S	S
374L00-AA	**Starter, Electric w/ Overcrank Protection** *(N.A. w/Cat. 3406C eng.)*	0	123.00	O	O
STD.	**Starter Interlock** *(Clutch Pedal Actuated)* ***(Standard)***	—	—	S	S
37AA00-BL	**Throttle, Locking T-Handle** *(Avail. w/Cat. 3306C eng. Code 30TG00 or Cat. 3406C eng.)*	1	23.00	O	O
37AD00-A4	**Throttle, Locking, Vernier Type** *(Avail. w/Cat. 3306C eng. Code 30TG00 or Cat. 3406C eng.)*	0	41.00	O	O
374H00-AC	**Warning & Shutdown System, Engine** *(Incl. warning light & chime Code 26M500; Avail. w/Cat. 3306C eng. only Code 30TG00) (Incl. w/Cat. 3406C eng.)*	1	317.00	O	O
	40 — FRAME — SINGLE REAR AXLES ONLY				
	Single Channel 13.3 SM, 120,000 PSI				
40E900	— 166″ wb ***(Standard)***	—	—	S	
40E900-DM	— 178″ thru 262″ wb	0	NC	O	
	Single Channel 15.9 SM, 120,000 PSI				
40FA00-EE	— 166″ wb	136	279.00	O	
40FA00-EG	— 178″ wb	145	279.00	O	
40FA00-EJ	— 190″ wb	152	279.00	O	
40FA00-EL	— 202″ wb	159	324.00	O	
40FA00-EN	— 208″ wb	168	324.00	O	
40FA00-ER	— 214″ wb	172	324.00	O	
40FA00-EV	— 226″ wb	178	400.00	O	
40FA00-EX	— 238″ wb	194	400.00	O	
40FA00-E0	— 250″ wb	207	400.00	O	
40FA00-E2	— 262″ wb	220	400.00	O	

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	40 — FRAME — TANDEM REAR AXLES ONLY				
	Single Channel **13.3 SM, 120,000 PSI** *(N.A. w/46,000 lb. tandem Rear Axle) (N.A. for on-off hwy. service)*				
40E900-DP	— 166″ wb	0	NC		O
STD	— 178″ wb ***(Standard)***	—	—		S
40E900-DT	— 190″ thru 262″ wb	0	NC		O
	Single Channel **15.9 SM, 120,000 PSI**				
40FA00-E4	— 166″ wb	136	296.00		O
40FA00-E6	— 178″ wb	145	296.00		O
40FA00-E8	— 190″ wb	152	296.00		O
40FA00-FA	— 202″ wb	158	296.00		O
40FA00-FC	— 208″ wb	168	353.00		O
40FA00-FE	— 214″ wb	172	353.00		O
40FA00-FG	— 226″ wb	178	353.00		O
40FA00-FJ	— 238″ wb	194	353.00		O
40FA00-FL	— 250″ wb	207	400.00		O
40FA00-FN	— 262″ wb	220	400.00		O
	Single Channel, Integral, Extended Frame *(24″ from front of bumper to face of grille) (Req. crankshaft-driven PTO; Incl. radiator mounted (fixed) grille; N.A. w/bumper extension Code 59GK00, driving lights Code 27G800, or fog lights Code 27G700)* **20.25 SM, 125,000 PSI** *(Avail. w/walking beam or Neway tandem susp. only)*				
40FE00-BF	— 166″ wb	422	615.00		O
40FE00-BH	— 178″ wb	442	615.00		O
40FE00-BK	— 190″ wb	458	615.00		O
40FE00-BM	— 202″ wb	474	615.00		O
40FE00-BP	— 208″ wb	494	705.00		O
40FE00-BT	— 214″ wb	505	705.00		O
40FE00-BW	— 226″ wb	521	705.00		O
40FE00-BY	— 238″ wb	557	705.00		O
40FE00-B1	— 250″ wb	589	752.00		O
40FE00-B3	— 262″ wb	621	752.00		O
	Inverted "L" Reinforced *(N.A. w/5th wheel options or tapered rear frame ends) (N.A. w/HAS, HFS or Airliner 40K susp.)* **20.5 SM, 120,000 PSI**				
40FB00-BH	— 166″ wb	444	415.00		O
40FB00-BK	— 178″ wb	482	415.00		O
40FB00-BM	— 190″ wb	510	415.00		O
40FB00-BP	— 202″ wb	538	505.00		O
40FB00-BT	— 208″ wb	580	505.00		O
40FB00-BW	— 214″ wb	594	505.00		O
40FB00-BY	— 226″ wb	622	505.00		O
40FB00-B1	— 238″ wb	685	552.00		O
40FB00-B3	— 250″ wb	741	552.00		O
40FB00-B5	— 262″ wb	797	552.00		O
	Single Channel, Variable Depth Rail **26.0 SM, 120,000 PSI** *(N.A. w/46,000 lb. tandem Rear Axle) (Avail. w/walking beam tandem susp. only) (Avail. w/truck only) (Avail. w/single vert. muffler Codes 32FW00, 32FX00, 32FY00 or 32F000, single transverse muffler & horiz. outlet Code 32FN00 or single transverse muffler & vert. outlet Codes 32FP00 or 32FR00) (N.A. w/rear mtd. dual 80 or 100 gal. rect. fuel tanks; rear mtd. dual 100, 120 or 150 gal. cyl. fuel tanks or forward mtd. dual 120 or 150 gal. cyl. fuel tanks)*				
40GN00-AT	— 208″ wb	N/A	848.00		O
40GN00-AP	— 214″ wb	N/A	848.00		O
40GN00-AM	— 226″ wb	N/A	928.00		O
40GN00-AK	— 238″ wb	N/A	928.00		O

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	40 — FRAME — TANDEM REAR AXLES ONLY (Continued)				
	Double Channel *(N.A. w/5th wheel options or tapered rear frame ends)* **27.0 SM, 120,000 PSI** *(N.A. w/HAS-400, HAS-40LH or any HFS susp.)*				
40FC00-BH	— 166″ wb	588	745.00		O
40FC00-BK	— 178″ wb	636	745.00		O
40FC00-BM	— 190″ wb	671	745.00		O
40FC00-BP	— 202″ wb	706	909.00		O
40FC00-BT	— 208″ wb	759	909.00		O
40FC00-BW	— 214″ wb	776	909.00		O
40FC00-BY	— 226″ wb	811	909.00		O
40FC00-B1	— 238″ wb	890	995.00		O
40FC00-B3	— 250″ wb	960	995.00		O
40FC00-B5	— 262″ wb	1030	995.00		O
	Double Channel *(N.A. w/5th wheel options or tapered rear frame ends)* **30.0 SM, 120,000 PSI** *(N.A. w/HAS-400, HAS-40LH or any HFS susp.)*				
40FD00-BH	— 166″ wb	698	911.00		O
40FD00-BK	— 178″ wb	756	911.00		O
40FD00-BM	— 190″ wb	798	911.00		O
40FD00-BP	— 202″ wb	840	1111.00		O
40FD00-BT	— 208″ wb	903	1111.00		O
40FD00-BW	— 214″ wb	924	1111.00		O
40FD00-BY	— 226″ wb	966	1111.00		O
40FD00-B1	— 238″ wb	1060	1215.00		O
40FD00-B3	— 250″ wb	1144	1215.00		O
40FD00-B5	— 262″ wb	1228	1215.00		O
	FRAME MODIFICATIONS				
	Extended Frame, Front, Integral *(24″ from front of bumper to face of grille) (Req. crankshaft-driven PTO; Incl. radiator mounted (fixed) grille and full width swept back steel bumper painted Med. Titanium; N.A. w/bumper extension Code 59H300, driving lights Code 27G800 or fog lights Code 27G700) (N.A. as 250″ or 262″ wb tandem axle tractor)*				
40GB00-AT	— Avail. w/ 15.9 SM Frame only	68	269.00	O	O
40GB00-AW	— Avail. w/ 20.5 SM Frame only	68	269.00		O
40GB00-AY	— Avail. w/ 27.0 SM Frame only	68	269.00		O
40GB00-A1	— Avail. w/ 30.0 SM Frame only	68	269.00		O
	Frame Crossmembers				
40EX00-AC	**Tractor Ramp Rear Crossmember, Full Width, Steel** *(Incl. crossmember mtd. taillights in lieu of standard; Avail. w/on-hwy. tractor only; N.A. w/trailer towing pkg. Code 19NH00) (N.A. w/square cut frame ends Code 40EN00, Truck-Lite rear lighting Code 27AAR0, reinforced frame or Neway rear susp.)*	45	64.00	O	O
	Frame End, Rear				
40EN00-AD	**Square Cut** *(Avail. w/tractor only; Incl. w/truck)*	9	NC	O	O
40EM00-AC	**Tapered End Caps, Bolt-on** *(Avail. w/tractor only; N.A. w/reinforced frame Code 40FB00, square cut frame ends Code 40EN00, tractor ramp crossmember Code 40EX00 or outside frame rail mounted taillights Code 275600)*	12	71.00	O	O
40EL00	**Huck Fasteners, Frame** *(Rear cab supt., intermediate and rear suspension crossmembers)* ***(Standard)***	—	—	S	S
40G400-AB	**Huck Fasteners, Frame — Delete** *(All Bolted Frame)*	-19	NC	O	O

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	43 — FUEL TANKS *(Refer to the Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions.)*				
	Rectangular Tanks, Steel — Shallow *(N.A. w/sleeper)*				
	45 gal. (CLEAN CA) *(N.A. w/4-battery system w/electronic engines)*				
43PA00-AB	— Single R.H. *(Avail. only w/std. L.H. under cab battery box)*	-26	NC	O	O
43N900-AB	— Single L.H. *(Req. R.H. under cab battery box Code 29LG00 or 29LJ00)*	-26	CR 60.00	O	O
	55 gal.				
43L700	— Single R.H. ***(Standard)***	—	—	S	S
43L800-AB	— Single L.H. *(Req. opt. battery box location w/forward mtd. fuel tank)*	0	NC	O	O
43L900-AB	— Dual *(Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank)*	196	399.00	O	O
	80 gal.				
43MB00-AB	— Single R.H.	54	197.00	O	O
43MA00-AB	— Single L.H. *(Req. opt. battery box location w/forward mtd. fuel tank)*	54	197.00	O	O
43MC00-AB	— Dual *(Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank)*	309	709.00	O	O
	Rectangular Tanks, Dual Mixed Capacity, Steel — Shallow *(N.A. w/sleeper) (L.H. tank rear mtd. — R.H. tank fwd. mtd.) (Deletes std. fuel cooler) (Incl. dual draw/dual return fuel lines without crossover w/electronic engines)*				
43MD00-AB	**30 gal. L.H., 55 gal. R.H.**	168	321.00	O	O
43ME00-AB	**55 gal. L.H., 80 gal. R.H.**	251	560.00	O	O
	Rectangular Tanks, Steel — Deep *(N.A. w/sleeper)*				
	50 gal.				
43MX00-AA	— Single R.H. *(N.A. forward mounted)*	17	NC	O	O
43MW00-AB	— Single L.H. *(N.A. forward mounted)*	17	NC	O	O
43MY00-AB	— Dual *(Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (N.A. forward mounted)*	236	399.00	O	O
	60 gal. (CLEAN CA) *(N.A. w/4-battery system w/electronic engines)*				
43PE00-AB	— Single R.H. *(Req. std. L.H. under cab battery box)*	21	79.00	O	O
43PD00-AB	— Single L.H. *(Req. R.H. under cab battery box Code 29LG00 or 29LJ00)*	21	79.00	O	O
	75 gal.				
43M100-AC	— Single R.H.	50	197.00	O	O
43M000-AC	— Single L.H. *(Req. opt. battery box location w/forward mtd. fuel tank) (N.A. w/aero cab side extenders pkg. Code 231F00)*	50	197.00	O	O
43M200-AC	— Dual *(Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank) (N.A. w/aero cab side extenders pkg. Code 231F00)*	301	709.00	O	O
	100 gal.				
43M400-AB	— Single R.H.	125	229.00	O	O
43N000-AB	— Single L.H. *(Req. opt. battery box location w/forward mtd. fuel tank)*	125	229.00	O	O
43M500-AB	— Dual *(Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank)*	451	855.00	O	O
	Rectangular Tanks, Dual Mixed Capacity, Steel — Deep *(N.A. w/sleeper) (L.H. tank rear mtd. — R.H. tank fwd. mtd.) (Deletes std. fuel cooler) (Incl. dual draw/dual return fuel lines without crossover w/electronic engines)*				
43M600-AB	**50 gal. L.H., 75 gal. R.H.**	268	571.00	O	O
43M700-AB	**75 gal. L.H., 100 gal. R.H.** *(N.A. w/aero cab side extenders pkg. Code 231F00)*	371	800.00	O	O

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	43 — FUEL TANKS *(Refer to the Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions.)* **(Continued)**				
	Cylindrical Tanks, Steel — 24″ Dia.				
	50 gal. (CLEAN CA) *(N.A. w/sleeper) (N.A. w/4-battery system w/electronic engines)*				
43PC00-AB	— Single R.H. *(Req. std. L.H. under cab battery box)*	-44	NC	0	0
43PB00-AB	— Single L.H. *(Req. R.H. under cab battery box Code 29LG00 or 29LJ00)*	-44	NC	0	0
	70 gal.				
43MF00-AC	— Single R.H.	-4	197.00	0	0
43MG00-AB	— Single L.H. *(Req. opt. battery box location w/forward mtd. fuel tank)*	-4	197.00	0	0
43MH00-AC	— Dual *(Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank)*	193	709.00	0	0
	100 gal.				
43MJ00-AC	— Single R.H.	23	229.00	0	0
43LD00-AB	— Single L.H. *(Req. opt. battery box location w/forward mtd. fuel tank)*	23	229.00	0	0
43MK00-AC	— Dual *(Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank)*	247	855.00	0	0
	120 gal.				
43GW00-AP	— Dual *(Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank)*	336	947.00	0	0
	Cylindrical Dual Mixed Capacity, Steel *(L.H. tank rear mtd. — R.H. tank fwd. mtd.) (Deletes std. fuel cooler) (Incl. dual draw/dual return fuel lines without crossover w/electronic engines)*				
43ML00-AC	**70 gal. L.H., 100 gal. R.H.**	204	800.00	0	0
	Cylindrical Tanks, Aluminum — 24″ Dia. *(Front mud flaps Code 60AHM0 recommended w/forward mtd. tank)*				
	70 gal.				
43MM00-AC	— Single R.H.	-57	237.00	0	0
43MN00-AB	— Single L.H. *(Req. opt. battery box location w/forward mtd. fuel tank)*	-57	237.00	0	0
43MP00-AC	— Dual *(Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank)*	87	992.00	0	0
	100 gal.				
43FT00-AC	— Single R.H.	-39	267.00	0	0
43D200-AB	— Single L.H. *(Req. opt. battery box location w/forward mtd. fuel tank)*	-39	267.00	0	0
43MR00-AC	— Dual *(Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank)*	123	1141.00	0	0
	120 gal.				
43A000-AP	— Dual *(Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank)*	230	1247.00	0	0
	150 gal.				
43E600-AK	— Dual *(Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank) (N.A. w/Allison HT-740/750 w/forward mtd. fuel tanks)*	240	1681.00	0	0
	Cylindrical Dual Mixed Capacity, Aluminum *(L.H. tank rear mtd. — R.H. tank fwd. mtd.) (Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Front mud flaps Code 60AHM0 recommended)*				
43MT00-AC	**70 gal. L.H., 100 gal. R.H.**	89	1080.00	0	0
43MV00-AA	**120 gal. L.H., 150 gal. R.H.** *(N.A. w/Allison HT-740/750)*	232	1479.00	0	0

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	43 — FUEL TANKS *(Refer to the Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions.)* **(Continued)**				
	Cylindrical Tanks, Polished Aluminum — 24″ Dia. *(Front mud flaps Code 60AHM0 recommended w/forward mtd. tank)*				
	70 gal.				
43NN00-AB	— Single R.H.	-57	399.00	O	O
43NM00-AA	— Single L.H. *(Req. opt. battery box location w/forward mtd. fuel tank)*	-57	399.00	O	O
43NP00-AB	— Dual *(Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank)*	87	1313.00	O	O
	100 gal.				
43NT00-AB	— Single R.H.	-39	636.00	O	O
43NR00-AA	— Single L.H. *(Req. opt. battery box location w/forward mtd. fuel tank)*	-39	636.00	O	O
43NV00-AE	— Dual *(Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank)*	123	1599.00	O	O
	120 gal.				
43CR00-AN	— Dual *(Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank)*	230	1747.00	O	O
	150 gal.				
43NX00-AA	— Dual *(Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank) (N.A. w/Allison HT-740/750 w/forward mtd. fuel tanks)*	240	2276.00	O	O
	Cylindrical Dual Mixed Capacity, Polished Aluminum *(L.H. tank rear mtd. — R.H. tank fwd. mtd.) (Deletes std. fuel cooler) (Incl. dual draw/dual return fuel lines without crossover w/electronic engines) (Front mud flaps Code 60AHM0 recommended)*				
43NW00-AB	**70 gal. L.H., 100 gal. R.H.**	104	1445.00	O	O
43NY00-AB	**120 gal. L.H., 150 gal. R.H.** *(N.A. w/Allison HT-740/750)*	232	2027.00	O	O
	44 — FUEL TANK EQUIPMENT				
STD.	**Fuel Cooler** *(with electronic engines w/single fuel tanks only)* ***(Standard)***	—	—	S	S
	Fuel Tank Mounting Location				
STD.	**Forward Mounted Fuel Tank** *(Max Location)* ***(Standard)*** *(N.A. w/mixed fuel tanks) (See Fuel Tank-Battery Box-Wheelbase Restriction Charts at the end of this model, for usage w/battery box)*	—	—	S	S
44HM00-AC	**Rear Mounted Fuel Tank** *(N.A. w/mixed fuel tanks) (N.A. w/CLEAN CA fuel tanks) (See Fuel Tank-Battery Box-Wheelbase Restriction Charts at the end of this model, for usage w/battery box)*	0	79.00	O	O
	Fuel Tank Supports				
	— Lightweight Tank Mounting Supports *(Avail. w/cylindrical tanks only; For on-hwy. only)*				
44HP00-AF	— Dual fuel tanks	-70	147.00	O	O
STD.	— Standard-Weight Tank Supports ***(Standard)***	—	—	S	S
	Fuel Lines				
44HX00-AB	**— Dual Draw/ Dual Return With Under Tank Crossover** *(Avail. w/electronic engines only) (Avail. w/equal capacity dual fuel tanks only) (N.A. w/forward mtd. dual 150 gal. fuel tanks) (N.A. w/instr. pnl. mtd. push button control for Allison electronic trans. Code 57C400 in comb. w/any horiz. muffler system)*	15	15.00	O	O
STD.	**— Single Draw/ Return** ***(Standard)***	—	—	S	S
	Steps				
STD.	Cab Length, Fuel Tank Mounted ***(Standard)***	—	—	S	S

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	46 — SUSPENSION, FRONT *(Optimum ride and handling qualities are obtained with matched suspension. Mixed taper-leaf and multi-leaf suspensions on a vehicle is not available. See Component Book for details)*				
	SUSPENSION, FRONT, MULTI-LEAF, 54″ SPREAD *(N.A. w/taper-leaf rear susp.)*				
46CT00-AF	**10,000 lb. Cap. for 10,000 lb. Front Axle** Code 10AG00	0	NC	O	O
46CT00-AG	**10,000 lb. Cap. for 12,000 lb. Front Axle** Code 10AE00	-20	CR 20.00	O	O
46CV00-AG	**12,000 lb. Cap. for 10,000 lb. Front Axle** Code 10AG00	20	20.00	O	O
46CV00	**12,000 lb. Cap. for 12,000 lb. Front Axle** Code 10AE00 ***(Standard)***	—	—	S	S
46CV00-AL	**12,000 lb. Cap. for 13,000 lb. Front Axle** Code 10AM00	-15	CR 20.00	O	O
46CW00-AG	**13,200 lb. Cap. for 12,000 lb. Front Axle** Code 10AE00	15	20.00	O	O
46CW00-AJ	**13,200 lb. Cap. for 13,000 lb. Front Axle** Code 10AM00	0	NC	O	O
46CW00-AL	**13,200 lb. Cap. for 14,600 lb. Front Axle** Code 10A200	-48	CR 20.00	O	O
46CX00-AG	**14,600 lb. Cap. for 14,600 lb. Front Axle** Code 10A200	0	NC	O	O
46CY00-AE	**16,000 lb. Cap. for 14,600 lb. Front Axle** Code 10A200	36	20.00	O	O
46CY00-AG	**16,000 lb. Cap. for 16,000 lb. Front Axle** Code 10AF00	0	NC	O	O
46CY00-AK	**16,000 lb. Cap. for 18,000 lb. Front Axle** Code 10AD00	-5	CR 20.00	O	O
46C000-AD	**18,000 lb. Cap. for 16,000 lb. Front Axle** Code 10AF00	5	20.00	O	O
46C000-AE	**18,000 lb. Cap. for 18,000 lb. Front Axle** Code 10AD00	0	NC	O	O
46C000-AF	**18,000 lb. Cap. for 20,000 lb. Front Axle** Code 10AH00	-19	CR 20.00		O
46C100-AC	**20,000 lb. Cap. for 18,000 lb. Front Axle** Code 10AD00	19	20.00		O
46C100-AD	**20,000 lb. Cap. for 20,000 lb. Front Axle** Code 10AH00	0	NC		O
	SUSPENSION, FRONT, TAPER-LEAF, 54″ SPREAD *(Incl. front shock absorbers Code 13AB00) (N.A. w/multi-leaf rear susp.)*				
46C500-AD	**10,000 lb. Cap. for 10,000 lb. Front Axle** Code 10AG00 *(Avail. w/on-hwy. tractor only; N.A. w/severe duty)*	-44	NC	O	O
46C600-AE	**12,000 lb. Cap. for 10,000 lb. Front Axle** Code 10AG00 *(N.A. w/severe duty)*	-42	143.00	O	O
46C600-AH	**12,000 lb. Cap. for 12,000 lb. Front Axle** Code 10AE00 *(N.A. w/severe duty)*	-62	123.00	O	O
46C700-AG	**12,000 lb. Cap. for 12,000 lb. Front Axle** Code 10AE00 w/ premium bushings *(Avail. w/on-hwy tractor only)*	N/ A	307.00	O	O
46C800-AF	**13,200 lb. Cap. for 13,000 lb. Front Axle** Code 10AM00 *(N.A. w/severe duty)*	-51	123.00	O	O
46C800-AG	**13,200 lb. Cap. for 14,600 lb. Front Axle** Code 10A200 *(Avail. w/truck or on-off hwy. tractor; N.A. w/severe duty)*	-99	103.00	O	O
46C900-AH	**14,600 lb. Cap. for 13,000 lb. Front Axle** Code 10AM00 *(Avail. w/truck or on-off hwy. tractor only; N.A. w/severe duty)*	-37	143.00	O	O
46C900-AE	**14,600 lb. Cap. for 14,600 lb. Front Axle** Code 10A200 *(N.A. w/severe duty)*	-85	123.00	O	O
	47 — SUSPENSION, REAR — SINGLE AXLE *(All susp. hts. listed are for empty condition) (Optimum ride and handling qualities are obtained with matched suspension. Mixed taper-leaf and multi-leaf suspensions on a vehicle is not available. See Component Book for details)*				
	SUSPENSION, REAR — MULTI-LEAF *(N.A. w/taper-leaf front susp.)*				
47J700-AH	**21,000 lb. Cap.** *(Normal Ride) (46″) (Susp. ht. 10.88″ w/under 12,000 lb. F.A.; Susp. ht. 11.88″ w/12,000 lb. or higher F.A.) (Avail. w/truck only) (Incl. w/tractor)*	-4	CR 23.00	O	
47LS00-AD	**21,000 lb. Cap.** *(Soft Ride) (52″) (Susp. ht. 9.18″ w/under 12,000 lb. F.A.; Susp. ht. 10.18″ w/12,000 lb. or higher F.A.) (Avail. w/on-hwy. tractor only)*	-13	55.00	O	
47KA00	**23,000 lb. Cap.** *(46″) (Susp. ht. 11.28″ w/under 12,000 lb. F.A.; Susp. ht. 12.28″ w/12,000 lb. or higher F.A.) (w/truck only)* ***(Standard)***	—	—	S	
47J900-AB	**24,500 lb. Cap.** *(Avail. w/truck only) (Susp. ht. 12.00″)*	56	23.00	O	
	SUSPENSION, REAR — TAPER-LEAF *(Avail. for on-hwy. tractor applications only; Incl. rear shock absorbers) (N.A. w/multi-leaf front susp.)*				
47JP00-AD	**21,000 lb. Cap.** *(Normal Ride) (46″) (Susp. ht. 9.72″ w/under 12,000 lb. F.A.; Susp. ht. 10.72″ w/12,000 lb. or higher F.A.)*	-48	27.00	O	
47LT00-AB	**21,000 lb. Cap.** *(Soft Ride) (52″) (Susp. ht. 9.02″ w/under 12,000 lb. F.A.; Susp. ht. 10.02″ w/12,000 lb. or higher F.A.)*	4	103.00	O	

NOTE: All capacity ratings shown represent on-highway application.

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	47 — SUSPENSION, REAR — SINGLE AXLE *(All susp. hts. listed are for empty condition) (Optimum ride and handling qualities are obtained with matched suspension. Mixed taper-leaf and multi-leaf suspensions on a vehicle is not available. See Component Book for details)* **(Continued)**				
	SUSPENSION, REAR, AIR				
	23,000 lb. Cap. AirLiner Air Susp. w/ inner wheel chain clearance (1) *(Incl. transverse control rods; brake camshaft support brackets & two shock absorbers) (Susp. ht. 10.00″) (N.A. on severe duty) (N.A. w/2-speed rear axle)*				
47LX00-AB	— Avail. w/ truck only	N/A	1129.00	O	
47LX00-AE	— Avail. w/ tractor only *(Incl. I/P mtd. air susp. dump valve Code 48AC00)*	N/A	1232.00	O	
	23,000 lb. Cap. Hendrickson Air, HAS-230 *(N.A. for severe duty) (Susp. ht. 8.50″)*				
47KF00-AC	— Avail. w/ truck only	-69	916.00	O	
47KF00-AG	— Avail. w/ tractor only *(Incl. I/P mtd. air susp. dump valve)*	-4	1051.00	O	
	23,000 lb. Cap. Neway Air, AD-123 *(Avail. w/RS-23-161 23,000 lb. Rear Axle only) (N.A. w/fifth wheel) (N.A. for severe duty) (Susp. ht. 8.75″)*				
47KG00-AC	— Avail. w/ truck only	41	1492.00	O	
47KG00-AG	— Avail. w/ tractor only *(Incl. I/P mtd. air susp. dump valve Code 48AC00 & square cut frame ends Code 40EN00)*	118	1625.00	O	
	SUSPENSION, REAR — AUXILIARY *(Recommended for use w/high center of gravity loads and/or off-hwy. operations)*				
47KH00	**Single Leaf** ***(Standard w/ truck only)***	—	—	S	
47KH00-AD	**Single Leaf** *(Avail. w/tractor only) (N.A. w/air ride suspensions)*	61	59.00	O	
47KJ00-AB	**Multi-Leaf** *(Avail. w/truck only) (N.A. w/soft ride or air ride suspensions)*	44	27.00	O	
47KJ00-AJ	**Multi-Leaf** *(Avail. w/tractor only) (N.A. w/soft ride or air ride suspensions)*	106	87.00	O	
	47 — SUSPENSION, REAR, TANDEM *(All susp. hts. listed are for empty condition)*				
	SUSPENSION, REAR FOR 40,000 LB. AXLES				
	34,000 lb. Cap. Hendrickson Steel Walking Beam — 52″ Axle Spacing *(N.A. w/alum. cab)*				
47AW00	**U2-340** *(Susp. ht. 10.30″)* ***(Standard)***	—	—		S
47AX00-AY	**UE2-340** *(N.A. w/reinforced frames) (Susp. ht. 11.23″)*	117	76.00		O
	36,000 lb. Cap. Hendrickson 4-Spring *(N.A. w/Cat. 3406C eng.)*				
47KL00-AE	**HFS-40LH** — Avail. w/ on-hwy. tractor only *(12,000 lb. max. Front Axle; 80,000 lbs. max. GCWR; Not approved for lift axle applications; N.A. w/reinforced frame) (Susp. ht. 10.00″)*	-206	CR 709.00		O
47K900-AB	**HFS-400** — Avail w/ on-hwy. truck only *(14,600 lb. max. Front Axle; N.A. w/reinforced frame) (Susp. ht. 10.11″)*	-134	CR 655.00		O

(1) Refer to Appendix for Suspension Applications.

NOTE: All capacity ratings shown represent on-highway application.

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	47 — SUSPENSION, REAR, TANDEM *(All susp. hts. listed are for empty condition)* (Continued)				
	SUSPENSION, REAR FOR 40,000 LB. AXLES (Continued)				
	40,000 lb. Cap. AirLiner Extra Duty Air Susp. — 51″ axle spacing (1) *(Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember, heavy duty axle housing & welded axle seats) (Susp. ht. 8.50″) (Avail. w/14,600 lb. max. front axle; max. 40,000 lb. rear axle) (Avail. only w/13.3 SM and 15.9 SM frame) (Refer to the frame chart for GVWR & WB restrictions)*				
47L000-AB	— Avail. w/ on-hwy. truck only	N/ A	CR 359.00		O
47L000-AE	— Avail. w/ on-hwy. tractor only *(Incl. I/P mtd. air susp. dump valve)*	N/ A	CR 256.00		O
	40,000 lb. Cap. Hendrickson Steel Walking Beam — 52″ Axle Spacing *(N.A. w/alum. cab)*				
47AY00-AW	**RT2-400** w/ rubber center bushings *(Susp. ht. 11.15″)*	248	501.00		O
47A000-AW	**RT2-400** w/ bronze center bushings *(Susp. ht. 11.15″)*	249	693.00		O
47A100-AN	**RT2-400** w/ transverse torque rods & rubber center bushings *(Susp. ht. 11.15″)*	315	908.00		O
47A300-AW	**RTE2-400** w/ rubber center bushings *(N.A. w/reinforced frames) (Susp. ht. 11.17″)*	299	633.00		O
47A400-AW	**RTE2-400** w/ bronze center bushings *(N.A. w/reinforced frames) (Susp. ht. 11.17″)*	310	825.00		O
47A500-AN	**RTE2-400** w/ transverse torque rods and rubber center bushings *(N.A. w/reinforced frames) (Susp. ht. 11.17″)*	368	1109.00		O
47A700-AL	**RS-400** w/ rubber center bushings *(Rubber sprung) (Avail. for truck only) (Susp. ht. 10.52″)*	40	1925.00		O
	40,000 lb. Cap Hendrickson 4-Spring *(N.A. w/Cat. 3406C eng.)*				
47KN00-AH	**HFS-400** — Avail. w/ on-hwy. tractor only *(14,600 lb. max. Front Axle; N.A. w/reinforced frame) (Susp. ht. 10.11″)*	-153	CR 655.00		O
	40,000 lb. Cap. Hendrickson Air — 52″ Axle Spacing *(N.A. w/Cat. 3406C eng.)*				
	HAS-40LH — With transverse torque rods *(12,000 lb. max. Front Axle; 80,000 lbs. max. GCWR) (Not approved for lift axle applications) (N.A. w/reinforced frames)*				
47KM00-AL	— Avail. w/ on-hwy. tractor only *(Incl. I/P mtd. air susp. dump valve) (Susp. ht. 8.50″)*	-81	319.00		O
	HAS-400 — With transverse torque rods *(14,600 lb. max. Front Axle; 55,000 lb. max. GVWR; 120,000 lb. max. GCWR) (Not approved for lift axle applications) (N.A. w/reinforced frames) (Susp. ht. 8.50″)*				
47KP00-AD	— Avail. w/ on-hwy. truck only	-27	319.00		O
47KP00-AT	— Avail. w/ tractor only *(Incl. I/P mtd. air susp. dump valve)*	-24	452.00		O
	HAS-402 — With transverse torque rods *(Avail. w/16-, 18- or 20,000 lb. front axle; Max. 66,000 lb. GVW; Max. 55,000 lb. GVW w/tag or pusher axle in the raised position) (N.A. w/20.5 SM "Inverted-L" reinforced frame; N.A. w/20.25 SM extended frame) (N.A. w/MD-series trans.) (N.A. for severe duty) (Susp. ht. 8.50″)*				
47KR00-AC	— Avail. w/ truck only *(Approved for single lift axle applications) (Site travel rating for tandem axle not to exceed 50,000 lb. on rear susp.)*	-13	271.00		O
47KR00-AH	— Avail. w/ tractor only *(Incl. I/P mtd. air susp. dump valve)*	-10	403.00		O

(1) Refer to Appendix for Suspension Applications.

NOTE: All capacity ratings shown represent on-highway application.

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	47 — SUSPENSION, REAR, TANDEM *(All susp. hts. listed are for empty condition)* **(Continued)**				
	SUSPENSION, REAR FOR 40,000 LB. AXLES (Continued)				
	40,000 lb. Cap. AirLiner Extra Duty Air Susp. w/ inner wheel chain clearance — 55″ axle spacing (1) *(Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember) (Includes heavy duty axle housing & welded axle seats) (Susp. ht. 8.50″) (Avail. w/14,600 lb. max. front axle; max. 40,000 lb. rear axle) (Avail. only w/13.3 SM and 15.9 SM frame) (Refer to the frame chart for GVWR & WB restrictions)*				
47L300-AB	— Avail. w/ on-hwy. truck only	N/A	CR 55.00		O
47L300-AE	— Avail. w/ on-hwy. tractor only *(Incl. I/P mtd. air susp. dump valve)*	N/A	49.00		O
	40,000 lb. Cap. AirLiner Extra Duty Air Susp. w/ inner chain clearance — 59″ axle spacing (1) *(Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember) (Includes heavy duty axle housing & welded axle seats) (Susp. ht. 8.50″) (Avail. w/14,600 lb. max. front axle; max. 40,000 lb. rear axle) (Avail. only w/13.3 SM and 15.9 SM frame) (Refer to the frame chart for GVWR & WB restrictions)*				
47L600-AB	— Avail. w/ on-hwy. truck only	N/A	CR 55.00		O
47L600-AE	— Avail. w/ on-hwy. tractor only *(Incl. I/P mtd. air susp. dump valve)*	N/A	49.00		O
	40,000 lb. Cap. Hendrickson Steel Walking Beam — 60″ Axle Spacing *(N.A. w/alum. cab)*				
47BF00-AK	**RT2-400** w/ transverse torque rods and rubber center bushings *(Susp. ht. 11.13″)*	405	1293.00		O
47BG00-AK	**RTE2-400** w/ transverse torque rods and rubber center bushings *(N.A. w/reinforced frames) (Susp. ht. 11.14″)*	387	1425.00		O
	40,000 lb. Cap. Hendrickson Air — 60″ Axle Spacing *(N.A. w/Cat. 3406C eng.)*				
	HAS-400 w/ transverse torque rods *(14,600 lb. max. Front Axle; 55,000 lb. max. GVWR; 120,000 lb. max. GCWR) (Not approved for lift axle applications) (N.A. w/reinforced frames) (Susp. ht. 8.50″)*				
47KT00-AD	— Avail. w/ on-hwy. truck only	-19	881.00		O
47KT00-AR	— Avail. w/ tractor only *(Incl. I/P mtd. air susp. dump valve)*	-16	1015.00		O
	46,000 lb. Cap. Neway Air — 54″ Axle Spacing *(Max. 208″ wb w/Cat. 3406C eng. only)*				
	AD-246 w/ transverse torque rods *(N.A. w/severe duty) (Susp. ht. 8.75″)*				
47KV00-AF	— Avail. w/ truck only	138	2103.00		O
47KV00-AN	— Avail. w/ tractor only *(Incl. I/P mtd. air susp. dump valve Code 48AC00 & square cut frame ends Code 40EN00)*	150	2236.00		O
	46,000 lb. Cap. Neway Air — 60″ Axle Spacing *(Max. 208″ wb w/Cat. 3406C eng. only)*				
	AD-246 w/ transverse torque rods *(N.A. w/severe duty) (Susp. ht. 8.75″)*				
47KW00-AF	— Avail. w/ truck only	138	2405.00		O
47KW00-AN	— Avail. w/ tractor only *(Incl. I/P mtd. air susp. dump valve Code 48AC00 & square cut frame ends Code 40EN00)*	150	2539.00		O

(1) Refer to Appendix of Suspension Applications.

NOTE: All capacity ratings shown represent on-highway application.

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	47 — SUSPENSION, REAR, TANDEM *(All susp. hts. listed are for empty condition)* **(Continued)**				
	SUSPENSION, REAR FOR 46,000 LB. AXLES				
	46,000 lb. Cap. AirLiner Air Susp. — 51″ axle spacing (1) *(Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember, heavy duty axle housing & welded axle seats) (Susp. ht. 10.0″) (Avail. only w/13.3, 15.9, 26.0, 27.0 and 30.0 SM frames) (Refer to the frame chart for GVWR & WB restrictions) (N.A. on severe duty)*				
47L700-AB	— Avail. w/ on-hwy. truck only	N/A	151.00		
47L700-AD	— Avail. w/ on-hwy. tractor only *(Incl. I/P mtd. air susp. dump valve)*	N/A	253.00		
	46,000 lb. Cap. AirLiner Air Susp. w/ inner wheel chain clearance — 55″ axle spacing (1) *(Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember, heavy duty axle housing & welded axle seats) (Susp. ht. 10.0″) (Avail. only w/13.3, 15.9, 26.0, 27.0 and 30.0 frames) (N.A. for severe duty) (Refer to the frame chart for GVWR & WB restrictions)*				
47L800-AB	— Avail. w/ truck only	N/A	379.00		O
47L800-AD	— Avail. w/ tractor only *(Incl. I/P mtd. air susp. dump valve Code 48AC00)*	N/A	481.00		O
	46,000 lb. Cap. AirLiner Air Susp. w/ inner wheel chain clearance — 59″ axle spacing (1) *(Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember, heavy duty axle housing & welded axle seats) (Susp. ht. 10.0″) (Avail. only w/13.3, 15.9, 26.0, 27.0 and 30.0 frames) (N.A. for severe duty) (Refer to the frame chart for GVWR & WB restrictions)*				
47L900-AB	— Avail. w/ truck only	N/A	379.00		O
47L900-AD	— Avail. w/ tractor only *(Incl. I/P mtd. air susp. dump valve Code 48AC00)*	N/A	481.00		O
	46,000 lb. Cap. Hendrickson Steel Walking Beam — 54″ Axle Spacing *(N.A. w/alum. cab)*				
47BB00-AM	**RT2-460** w/ transverse torque rods and rubber center bushings *(Susp. ht. 11.37″)*	73	1111.00		O
47BE00-AL	**RS-460** w/ bronze center bushings *(Rubber sprung) (Avail. for truck only) (Susp. ht. 10.51″)*	-200	3100.00		O
	46,000 lb. Cap. Hendrickson Steel Walking Beam — 60″ Axle Spacing *(N.A. w/alum. cab)*				
47BH00-AJ	**RT2-460** w/ transverse torque rods and rubber center bushings *(Susp. ht. 11.36″)*	86	1275.00		O
	46,000 lb. Cap. Neway Air — 54″ Axle Spacing *(Max. 208″ wb w/Cat. 3406C eng. only)*				
	AD-246 w/ transverse torque rods *(N.A. w/severe duty) (Susp. ht. 8.75″)*				
47KV00-AW	— Avail. w/ truck only	-256	1001.00		O
47KV00-A1	— Avail. w/ tractor only *(Incl. I/P mtd. air susp. dump valve Code 48AC00 & square cut frame ends Code 40EN00)*	-244	1135.00		O
	46,000 lb. Cap. Neway Air — 60″ Axle Spacing *(Max. 208″ wb w/Cat. 3406C eng. only)*				
	AD-246 w/ transverse torque rods *(N.A. w/severe duty) (Susp. ht. 8.75″)*				
47KW00-A3	— Avail. w/ truck only	-256	1303.00		O
47KW00-AY	— Avail. w/ tractor only *(Incl. I/P mtd. air susp. dump valve Code 48AC00 & square cut frame ends Code 40EN00)*	-244	1437.00		O

(1) Refer to Appendix for Suspension Applications.

NOTE: All capacity ratings shown represent on-highway application.

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	48 — SUSPENSION EQUIPMENT				
48AC00-AK	**Air Suspension Dump Valve — I/P Mounted** *(Avail. w/trucks w/air rear suspension only; Incl. w/tractors w/air rear suspension; N.A. w/tandem axle when differential main lockout Code 13AW00 is used in comb. w/air slide fifth wheel or inside/outside air Code 373T00)*	3	133.00	O	O
	50/ 51/ 52/ 53/ 54 — TIRES-WHEELS *(See Tire-Wheel Prices tab section for order codes, weights and prices; See Tire/Wheel/Axle Availability tab section for usage; See Component Book, Tires/Wheels/Wheel Equip. Section for other restrictions)*				
	Tires, Front				
50ACL0	Two, 275/ 80R 22.5G (14PR) Michelin XZE	—	—	S	S
	Tires, Rear				
51ACL0	Four, 275/ 80R 22.5G (14PR) Michelin XZE	—	—	S	
51ACL0	Eight, 275/ 80R 22.5G (14PR) Michelin XZE	—	—		S
	Wheels, Front				
52G000	Two, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	—	—	S	S
	Wheels, Rear				
53G000	Four, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	—	—	S	
53G000	Eight, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	—	—		S
	55 — WHEEL & TIRE EQUIPMENT				
	Hub Covers, Bright *(Incl. Bright Nut Covers) (Req. 10-hole disc wheels) (N.A. w/steel wheels in combination w/either alum. hubs or high tensile ferrous hubs) (Avail. w/22.5 x 7.50, 22.5 x 8.25 or 24.5 x 8.25 steel wheels only; Avail. w/22.5 x 8.25 or 24.5 x 8.25 alum. wheels only)*				
55CY00-AD	**— Front (2)**	1	95.00	O	O
55CZ00-AG	**— Rear, Single Axle (2)**	2	95.00	O	
55CZ00-AH	**— Rear, Tandem Axle (4)**	5	139.00		O
	Nut Covers, Bright, Threaded *(Avail. w/disc wheels only) (N.A. w/steel wheels in combination w/either alum. hubs or high tensile ferrous hubs) (Avail. w/22.5 x 7.50, 22.5 x 8.25 or 24.5 x 8.25 steel wheels only; Avail. w/22.5 x 8.25 or 24.5 x 8.25 alum. wheels only)*				
55CW00-AD	**— Front (20)**	1	51.00	O	O
55CX00-AG	**— Rear, Single Axle (20)**	1	51.00	O	
55CX00-AH	**— Rear, Tandem Axle (40)**	2	103.00		O
STD.	**Wheels, I.S.O. Steel Disc** *(Painted "Vendor White" — Not Pure White or Diamond White)* ***(Standard)***	—	—	S	S
	56 — TRANSMISSIONS				
	9-Speed Direct *(1)*				
	Fuller				
56A100-AR	— RT-11609A	12	47.00	O	O
56FN00	— RT-11709H ***(Standard)***	—	—	S	S
56B400-AV	— RT-12609A	14	211.00	O	O
56F100-AR	— RT-12709H	12	211.00	O	O
56GX00-AA	— RT-13609A	19	431.00	O	O
56GH00-AR	— RT-13709H	17	431.00	O	O
56BD00-AV	— RT-14609A	26	608.00	O	O
56F300-AR	— RT-14709H	27	608.00	O	O

(1) Req. rear trans. supt. Code 57BW00 w/Cat. 3406, Cum. N14+ or DDC-60 eng. for on-off hwy. or severe duty applications.

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	56 — TRANSMISSIONS (Continued)				
	9-Speed Overdrive *(1)*				
	Fuller				
56A400-AV	— RTX-11609B	0	47.00	O	O
56DE00-AV	— RTX-11609R	0	112.00	O	O
56F000-AR	— RTX-11709H	0	47.00	O	O
56BW00-AV	— RTX-12609B	12	259.00	O	O
56BY00-AV	— RTX-12609R	12	323.00	O	O
56F200-AR	— RTX-12709H	12	259.00	O	O
56GV00-AR	— RTX-13609B	17	477.00	O	O
56FK00-AR	— RTX-13609R	17	540.00	O	O
56HG00-AR	— RTX-13709H	17	477.00	O	O
56BL00-A3	— RTX-14609B	27	655.00	O	O
56DD00-A3	— RTX-14609R	27	719.00	O	O
56F400-AR	— RTX-14709H	27	655.00	O	O
56HF00-AA	— RTX-16709B	38	1651.00	O	O
56HB00-AJ	— RTX-16709H	38	1651.00	O	O
	10-Speed Direct *(1)*				
	Fuller				
56L200-AR	— RT-11710B	18	NC	O	O
56L300-AR	— RT-12710B	20	211.00	O	O
56L400-AT	— RT-13710B	25	431.00	O	O
56L500-AR	— RT-14710B	37	608.00	O	O
	10-Speed Direct (C2000 Heavy Duty) *(1)*				
	Fuller				
56Q300-AA	— FR-11210B	6	109.00	O	O
56Q400-AA	— FR-12210B	6	305.00	O	O
56QM00-AA	— FR-13210B	6	551.00	O	O
56QN00-AA	— FR-14210B	6	795.00	O	O
	10-Speed Direct — Low Inertia *(1)*				
	Fuller				
56N800-AA	— RTL-11710B	101	771.00	O	O
56N900-AA	— RTL-12710B	101	980.00	O	O
56PA00-AA	— RTL-13710B	101	1199.00	O	O
56PB00-AA	— RTL-14710B	106	1377.00	O	O
	10-Speed Overdrive *(1)*				
	Fuller				
56MK00-AR	— RTX-11710B	15	47.00	O	O
56LR00-AR	— RTX-11710C	23	47.00	O	O
56P200-AA	— RTO-11908LL	113	1615.00	O	O
56ML00-AR	— RTX-12710B	20	259.00	O	O
56LT00-AR	— RTX-12710C	20	259.00	O	O
56MM00-AR	— RTX-13710B	25	477.00	O	O
56LV00-AR	— RTX-13710C	25	477.00	O	O
56MN00-AT	— RTX-14710B	37	655.00	O	O
56LW00-AR	— RTX-14710C	37	655.00	O	O
56P300-AA	— RTO-14908LL	113	2623.00	O	O
56P400-AA	— RTO-16908LL	113	2723.00	O	O

(1) Req. rear trans. supt. Code 57BW00 w/Cat. 3406, Cum. N14+ or DDC-60 eng. for on-off hwy. or severe duty applications.

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	56 — TRANSMISSIONS (Continued)				
	10-Speed Overdrive (C2000 Heavy Duty) *(1)*				
	Fuller				
56Q500-AA	— FRO-11210B	6	259.00	O	O
56Q800-AA	— FRO-11210C	6	259.00	O	O
56Q600-AA	— FRO-12210B	6	459.00	O	O
56Q900-AA	— FRO-12210C	6	459.00	O	O
56Q700-AA	— FRO-13210B	6	703.00	O	O
56RA00-AA	— FRO-13210C	6	703.00	O	O
56QP00-AA	— FRO-14210B	6	880.00	O	O
56P800-AA	— FRO-14210C	6	880.00	O	O
56QQ00-AA	— FRO-15210B	16	1147.00	O	O
56P900-AA	— FRO-15210C	16	1147.00	O	O
56QR00-AA	— FRO-16210B	16	1396.00	O	O
56QA00-AA	— FRO-16210C	16	1396.00	O	O
	10-Speed Overdrive — Low Inertia *(1)*				
	Fuller				
56L100-AR	— RTLO-11610B	17	589.00	O	O
56LM00-AR	— RTLO-12610B	28	796.00	O	O
56LN00-AR	— RTLO-13610B	37	1007.00	O	O
56LP00-AR	— RTLO-14610B	47	1219.00	O	O
56LL00-AR	— RTLO-15610B	45	1541.00	O	O
56L000-AR	— RTLO-16610B	45	1756.00	O	O
	11-Speed Overdrive *(1)*				
	Fuller				
56QU00-AA	— RTO-11909MLL *(H-type shift pattern)*	83	2847.00	O	O
56QV00-AA	— RTO-14909MLL *(H-type shift pattern)*	83	3095.00	O	O
	13-Speed Overdrive — Low Inertia *(1)*				
	Fuller				
56L800-AR	— RTLO-12713A	69	1704.00	O	O
56L900-AR	— RTLO-14713A	69	2173.00	O	O
56MA00-AT	— RTLO-16713A	128	2844.00	O	O
	15-Speed Direct *(1)*				
	Fuller				
56P500-AA	— RT-14915	107	2139.00	O	O
	15-Speed Overdrive *(1)*				
	Fuller				
56P600-AA	— RTO-14915	107	2187.00	O	O
56P700-AA	— RTO-16915	107	2991.00	O	O
	18-Speed Overdrive *(1)*				
	Fuller				
56NW00-AB	— RTLO-18718B	135	3267.00	O	O
	4-Speed Automatic *(Avail. w/engs. to & incl. 370 HP, 2000 RPM min. or Cat. 3306C) (Incl. high temp. light, rear trans. supt. Code 57BW00 & pedestal mounted lever type shift control) (Req. Speed/Cruise control delete Code 37LG00) (N.A. w/multi-torque engines; N.A. w/150 gal. cyl. forward mounted fuel tanks or driver dual armrests) (See Component Book, Trans. Sect. for max. GVW/GCW)*				
	Allison				
56D300-AA	— HT-740	206	12763.00	O	O

(1) Req. rear trans. supt. Code 57BW00 w/Cat. 3406, Cum. N14 or DDC-60 eng. for on-off hwy. or severe duty applications.

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	56 — TRANSMISSIONS (Continued)				
	5-Speed Automatic *(Avail. w/engs. to & incl. 370 HP, 2000 RPM min. or Cat. 3306C) (Incl. high temp. light, rear trans. supt. Code 57BW00 & pedestal mounted lever type shift control) (Req. Speed/Cruise control delete Code 37LG00) (N.A. w/multi-torque engines; N.A. w/150 gal. cyl. forward mounted fuel tanks or driver dual armrests) (See Component Book, Trans. Sect. for max. GVW/GCW)*				
	Allison				
56D700-AA	— HT-750	306	16387.00	O	O
	5-Speed Electronic *(Avail. w/electronic engs. to & incl. 370 HP over 1900 RPM) (Incl. rear trans. supt. Code 57BW00) (Incl. General Utility Max. Feature ECU, "Do Not Shift" light, trans. oil cooler, internal oil filter & pedestal mounted lever type shift control) (N.A. w/Airliner or Hendrickson HAS tandem rear susp.) (Req. I/P mtd. shift control w/driver dual armrests Code 25AADJ) (N.A. w/Cat. 3306 eng.) (See Component Book, Trans. Sect. for futher discussion on engine/transmission compatability)*				
	Allison				
56KL00-AB	— HD-4050P, Close Ratio	165	13988.00	O	O
56KM00-AB	— HD-4550P, Wide Ratio	165	16535.00	O	O
	6-Speed Electronic *(Avail. w/electronic engs. to & incl. 370 HP over 1900 RPM) (Incl. rear trans. supt. Code 57BW00) (Incl. General Utility Max. Feature ECU, "Do Not Shift" light, trans. oil cooler, internal oil filter & pedestal mounted lever type shift control) (N.A. w/Airliner or Hendrickson HAS tandem rear susp.) (Req. I/P mtd. shift control w/driver dual armrests Code 25AADJ) (N.A. w/Cat. 3306 eng.) (See Component Book, Trans. Sect. for further discussion on engine/transmission compatability)*				
	Allison				
56KN00-AB	— HD-4060P, Close Ratio	165	14607.00	O	O
56KP00-AB	— HD-4560P, Wide Ratio	165	17213.00	O	O
	57 — TRANSMISSION EQUIPMENT				
57AA00-AC	**Cooler, Transmission Oil** *(Avail. w/engines 350 HP & over) (Avail. w/Fuller 11000 thru 14000 series transmission) (Incl. oil pump) (N.A. w/auto. trans.)*	6	375.00	O	O
57AA00-AX	**Cooler, Transmission Oil** *(Avail. w/engines 350 HP & over) (Avail. w/Fuller 15000 thru 18000 series transmission) (N.A. w/auto. trans.)*	6	180.00	O	O
	Control Console, Push Button *(For Allison electronic trans. only)*				
57C400-AB	— Instrument Panel Mounted *(N.A. when digital diagnostic message center Code 26M600 is used in comb. with I/P mtd. air cleaner restr. gauge Code 26MT00 or brake applications air press. gauge Code 26MP00)*	-5	9.00	O	O
57CD00-AP	— Pedestal Mounted *(N.A. w/driver swivel seat Code 25AAD0)*	0	9.00	O	O
57CE00-AR	**ECU, Maximum Feature *(Pumper)* in lieu of included ECU** *(For Allison HD electronic trans. only) (Avail. for Fire Truck Pumper applications only) (Refer to Component Book for complete details)*	2	265.00	O	O
57BW00-AA	**Support, Rear Transmission** *(Avail. w/Cat. 3406, Cum. N14 or DDC-60 eng. for on-hwy. applications w/manual trans.) (Required w/Cat. 3406, Cum. N14 or DDC-60 eng. w/manual trans. for on-off hwy. or severe duty applications)*	8	60.00	O	O
	Synthetic Lube - Mobil 50W				
57BC00-AB	**Transmission, Manual**	0	108.00	O	O
	59 — CHASSIS EQUIPMENT				
	Bumper, Front				
59HQ00-AB	**Aluminum, Anodized, Full Width, Flat**	-44	140.00	O	O
59HR00-AA	**Steel, Full Width, Chrome, Flat**	0	300.00	O	O
59AL00-AR	**Steel, Cut-Off, Painted Med. Titanium**	-39	CR 31.00	O	O
59AM00-AW	**Steel, Cut-Off, Painted Med. Titanium** *(w/Med. Titanium flex ends)*	-38	CR 19.00	O	O
59AX00	**Steel, Full Width, Painted Med. Titanium *(Standard)***	—	—	S	S
59H300-AB	**Bumper Extension, Front — 11″ Spacer** *(N.A. w/extended frame, front tow hooks Code 59AB00, driving lights Code 27G800 or fog lights Code 27G700) (N.A. as 262″ wb tandem axle tractor)*	2	68.00	O	O

	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	59 — CHASSIS EQUIPMENT (Continued)				
59AB00-BN	**Tow Hooks, Front** *(N.A. w/extended bumper)*	27	103.00	0	0
59AC00-AY	**Tow Hooks, Rear** *(Incl. square cut rear frame ends Code 40EN00) (Avail. w/truck only) (N.A. w/outside frame rail mtd. taillights Code 275600) (Req. min. 58″ AF w/mud flaps and single rear axle; Req. min. 63″ AF w/52″ HAS 51″ A/L tandem susp.; Req. min. 75″ AF w/60″ HAS, 55″ and 59″ A/L tandem susp. or w/mud flaps on HAS, A/L, HFS and Neway tandem susp.; Req. min. 90″ AF w/mud flaps in comb. w/walking beam tandem susp.)*	27	103.00	0	0
59AE00-AY	**Tow Hooks, Front & Rear** *(Incl. square cut rear frame ends Code 40EN00) (Avail. w/truck only) (N.A. w/outside frame rail mtd. taillights Code 275600 or extended bumper Code 59HC00) (Req. min. 58″ AF w/mud flaps and single rear axle; Req. min. 63″ AF w/52″ HAS and 51″ A/L tandem susp.; Req. min. 75″ AF w/60″ HAS, A/L 55″ and 59″ HFS and Neway tandem susp.; Req. min. 90″ AF w/mud flaps in comb. w/walking beam tandem susp.)*	41	207.00	0	0
SALES CODE	**60 — EQUIPMENT OPTIONS**				
	Fifth Wheels				
	— Avail. w/ tractor package only.				
	— Avail w/ 13.3 or 15.9 SM frames only.				
	— N.A. w/ 166″ wb w/ forward mounted 100 gal. L.H., R.H. or dual cyl. fuel tanks & aft of cab battery w/ taper-leaf or multi-leaf single rear susp.				
	— N.A. w/ Neway AD-123 single axle air suspension.				
	— Includes outboard mounted angle brackets.				
	— Painted Black only.				
	— L.H. release.				
	— DSO offsets avail. for both stationary and sliding fifth wheels.				
	Additional Restrictions: *(Apply only to Fontaine sliders, 36.7″ Holland sliders and 24.5″ Holland 6.62″ height sliders).*				
	— w/ Forward mounted fuel tank and aft of cab battery box w/ single rear axle				
	— N.A. w/ 166″ wb w/ 80 gal. or 100 gal. L.H., R.H. or dual rect. fuel tanks				
	— N.A. w/ 178″ wb w/ 120 gal. cyl. fuel tanks				
	— N.A. w/ 166″-202″ wb's w/ 150 gal. cyl. fuel tanks				
	— N.A. w/ 214″ wb w/ 68″ sleeper w/ any L.H. or dual cyl. fuel tanks				
	— w/ Forward mounted fuel tank and aft of cab battery w/ tandem rear axle				
	— N.A. w/ 166″ wb w/ 70 gal. L.H. or dual cyl. fuel tanks w/ HFS or 52″ HAS tandem suspensions.				
	— N.A. w/ 166″-190″ wb w/ 100 gal. L.H. or dual cyl. fuel tanks w/ 60″ HAS tandem suspensions.				
	— N.A. w/ 214″ wb w/ 68″ sleeper w/ 70 gal. L.H. or dual cyl. fuel tanks w/ 60″ HAS tandem suspension.				
	Air Slide Fifth Wheels: *(Incl. in-cab control) (N.A. w/tandem axle when differential main lockout Code 13AW00 is used in comb. w/air susp. dump valve Code 48AC00)*				
	— Fontaine Standard Duty, 24″ Air Slide *(On-hwy. only)*				
60CP00-AB	— 6.75″ Height	500	1411.00	0	0
60CR00-AB	— 7.75″ Height	506	1411.00	0	0
60CT00-AB	— 8.75″ Height	512	1447.00	0	0
	— Fontaine Heavy Duty, 24″ Air Slide				
60WL00-AB	— 6.75″ Height	588	1501.00	0	0
60WM00-AB	— 7.75″ Height	594	1501.00	0	0
60WN00-AB	— 8.75″ Height	600	1536.00	0	0
	— Holland 3500, 24.5″ Air Slide				
60AGM0-AB	— 6.62″ Height *(N.A. w/54″ Neway tandem susp.)*	601	1499.00	0	0
60AGN0-AB	— 7.62″ Height	531	1499.00	0	0
60AGP0-AB	— 8.62″ Height	536	1533.00	0	0

L / LT9511 — 111″ BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

SALES CODE	COMPONENT DESCRIPTION	WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
	60 — EQUIPMENT OPTIONS (Continued)				
	Fifth Wheels (Continued)				
	Air Slide Fifth Wheels: *(Incl. in-cab control) (N.A. w/tandem axle when differential main lockout Code 13AW00 is used in comb. w/air susp. dump valve Code 48AC00)* **(Continued)**				
	— Holland 3500, 36.75″ Air Slide *(N.A. w/Neway tandem susp.)*				
60AGW0-AB	— 7.62″ Height	576	1499.00	0	0
60AGX0-AB	— 8.62″ Height	581	1533.00	0	0
	— Holland Fleetmaster, 24.5″ Air Slide *(On-hwy. only)*				
60ST00-AB	— 6.62″ Height *(N.A. w/54″ Neway tandem susp.) (Min. 202″ wb w/150 gal. cyl. tanks)*	529	1499.00	0	0
60PQ00-AB	— 7.62″ Height	479	1499.00	0	0
60AGT0-AB	— 8.62″ Height	484	1533.00	0	0
	— Holland Fleetmaster, 36.75″ Air Slide *(On-hwy. only) (N.A. w/Neway tandem susp.) (Min. 202″ wb w/150 gal. cyl. tanks)*				
60AGU0-AB	— 7.62″ Height	512	1499.00	0	0
60AGV0-AB	— 8.62″ Height	517	1533.00	0	0
	Manual Slide Fifth Wheels				
	— Fontaine Standard Duty, 24″ Manual Slide *(On-hwy. only) (Min. 202″ wb w/150 gal. tanks)*				
60AGY0-AB	— 6.75″ Height	496	1351.00	0	0
60CX00-AB	— 7.75″ Height	502	1351.00	0	0
60CY00-AB	— 8.75″ Height	508	1387.00	0	0
	— Holland 3500, 24.5″ Manual Slide				
60AG20-AB	— 6.62″ Height *(N.A. w/54″ Neway tandem susp.)*	601	1464.00	0	0
60AG30-AB	— 7.62″ Height	531	1464.00	0	0
60AG40-AB	— 8.62″ Height	536	1500.00	0	0
	— Holland Fleetmaster, 24.5″ Manual Slide *(On-hwy. only)*				
60FU00-AB	— 6.62″ Height *(N.A. w/54″ Neway tandem susp.) (Min. 202″ wb w/150 gal. tanks)*	521	1464.00	0	0
609Q00-AB	— 7.62″ Height	483	1464.00	0	0
60AG10-AB	— 8.62″ Height	488	1500.00	0	0
	Stationary Fifth Wheels				
	— Stationary Fifth Wheel offsets are 6″ ahead of Rear Axle centerline.				
	— Holland 3500, Stationary				
60AGJ0-AB	— 6.62″ Height	376	997.00	0	0
60AGK0-AB	— 7.62″ Height	381	997.00	0	0
60AGL0-AB	— 8.62″ Height	386	1039.00	0	0
	— Holland Fleetmaster, Stationary *(On-hwy. only)*				
60AGQ0-AB	— 6.62″ Height	324	997.00	0	0
60AGR0-AB	— 7.62″ Height	330	997.00	0	0
60AGS0-AB	— 8.62″ Height	328	1039.00	0	0
60AHM0-AB	**Mud Flaps, Front**	5	51.00	0	0
	Mud Flaps, Rear				
	Fleetliner, Black Rubber *(Incl. tapered brackets)*				
60AAM0-AB	— Avail. w/ truck only	36	111.00	0	0
60AAM0-AG	— Avail. w/ tractor only	18	111.00	0	0
	Fleetliner, White Rubber *(Incl. stainless brackets)*				
60AAN0-AB	— Avail. w/ truck only	28	175.00	0	0
60AAN0-AG	— Avail. w/ tractor only	10	175.00	0	0
	Quarter Fenders *(Req. dual fuel tanks & between the rails battery box w/166″ wb. tandem susp.) (Req. min. 220″ wb w/68″ sleeper & any 60″ suspension) (Avail. w/tractor only) (Refer to Quarter Fenders Restriction charts in the Appendix at the end of this model for additional restrictions.)*				
60AAK0-AB	**Fleetliner, Black Ultra Rubber**	24	161.00	0	0
60AAL0-AB	**Fleetliner, Stainless Steel**	32	243.00	0	0
	62 — MISCELLANEOUS OPTIONS				
62AF00-BW	**Puerto Rico Delivery** *(Avail. for export only)*	0	NC	0	0

111" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/NON SLEEPER
FORWARD MTD. FUEL TANK

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX
					LH (29KE00) Standard Weight (29KD00) Light Weight (1)	RH (29LG00) Standard Weight (29LJ00) Light Weight (1)	LH (29KF00) (N.A. w/4-battery system) LH&RH (29LL00) (Req. 4-battery system)	◆(29KH00) (Avail. w/Tractor only, 208" wb max. and 13,000 lb. front axle max. N.A. w/HD Trans. w/tandem axles; N.A. w/severe duty)
SHALLOW RECTANGULAR								
45 gal. (Clean CA)	RH LH	43PA00 43N900	N/A	N/A	Not Available w/LH fuel tanks Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH fuel tanks Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
55 gal.	RH LH Dual	43L700 43L800 43L900	N/A	N/A	Not Available w/LH or dual fuel tanks Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req. min. 178" wb w/ walking beam or 60" HAS and 51" A/L tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp. Req, min. 190" wb w/Neway tandem susp.	Req. min. 178" wb w/walking beam, 60" HAS or Neway and A/L tandem susp.
80 gal.	RH LH Dual	43MB00 43MA00 43MC00	N/A	N/A	Not Available w/LH or dual fuel tanks Req. min. 178" wb w/60" Neway tandem susp. Req. min. 190" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 178" wb w/60" Neway tandem susp. Req. min. 190" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req, min. 190" wb w/Neway, Walking beam, HAS, HFS, and 51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req. min. 178" wb w/walking beam, 60" HAS or Neway tandem susp. Req. min. 190" wb w/all tandem susp.

(1) 4-battery/1-box availability:
• Avail. w/166" wb w/all single and 52" HAS/HFS tandem rear susp. • Avail. w/178 wb w/all single and all tandem rear susp.
• N.A. w/190 wb • Avail. w/202" thru 262" wb w/all single and all tandem rear susp.

111" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/NON SLEEPER
FORWARD MTD. FUEL TANK

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX
					LH (29KE00) Standard Weight (29KD00) Light Weight (1)	RH (29LG00) Standard Weight (29LJ00) Light Weight (1)	LH (29KF00) (N.A. w/4-battery system) LH&RH (29LL00) (Req. 4-battery system)	◆(29KH00) (Avail. w/Tractor only, 208" wb max. and 13,000 lb. front axle max. N.A. w/HD Trans. w/tandem axles; N.A. w/severe duty)
DEEP RECTANGULAR								
60 gal. (Clean CA)	RH LH	43PE00 43PD00	N/A	N/A	Not Available w/LH fuel tanks Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH fuel tanks Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
75 gal.	RH LH Dual	43M100 43M000 43M200	N/A	N/A	Not Available w/LH or dual fuel tanks Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req. min. 178" wb w/ walking beam or 60" HAS and 51" A/L tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp. Req, min. 190" wb w/Neway tandem susp.	Req. min. 178" wb w/walking beam, 60" HAS, Neway and 51" A/L tandem susp. Req. min. 190" wb w/55" and 59" Airliner tandem susp.
100 gal.	RH LH Dual	43M400 43N000 43M500	N/A	N/A	Not Available w/LH or dual fuel tanks Req. min. 178" wb w/walking beam, 60" HAS or all Neway tandem susp. Req. min. 190" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 178" wb w/walking beam, 60" HAS or all Neway tandem susp. Req. min. 190" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req. min. 214" wb w/walking beam, HFS or HAS tandem and 51" A/L susp. Req. min. 226" wb w/Neway or Airliner 55" and 59" tandem susp.	Req. min. 178" wb w/walking beam, 60" HAS or Neway and 51" A/L tandem susp. Req. min. 190" wb w/55" and 59" Airliner tandem susp. Req. min. 190" wb w/all tandem susp.

(1) 4-battery/1-box availability:
• Avail. w/166" wb w/all single and 52" HAS/HFS tandem rear susp. • Avail. w/178 wb w/all single and all tandem rear susp.
• N.A. w/190 wb • Avail. w/202" thru 262" wb w/all single and all tandem rear susp.

111" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/NON SLEEPER
FORWARD MTD. FUEL TANK

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX
					LH (29KE00) Standard Weight (29KD00) Light Weight (1)	RH (29LG00) Standard Weight (29LJ00) Light Weight (1)	LH (29KF00) (N.A. w/4-battery system) LH&RH (29LL00) (Req. 4-battery system)	◆(29KH00) (Avail. w/Tractor only, 208" wb max. and 13,000 lb. front axle max. N.A. w/HD Trans. w/tandem axles; N.A. w/severe duty)
CYLINDRICAL TANKS								
50 gal. (Clean CA)	RH LH	43PC00 43PB00	N/A	N/A	Not Available w/LH fuel tanks Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH fuel tanks Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
70 gal.	RH LH Dual	43MF00 43MG00 43MH00	43MM00 43MN00 43MP00	43NN00 43NM00 43NP00	Not Available w/LH or dual fuel tanks Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req. min. 178" wb w/ walking beam or 60" HAS and 51" A/L tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp. Req. min. 190" wb w/Neway tandem susp.	Req. min. 178" wb w/walking beam, 60" HAS or Neway and 51" A/L tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.
100 gal.	RH LH Dual	43MJ00 43LD00 43MK00	43FT00 43D200 43MR00	43NT00 43NR00 43NV00	Not Available w/LH or dual fuel tanks Req. min. 178" wb w/Neway, Walking beam, HAS, and HFS tandem susp. Req. min. 190" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 178" wb w/all tandem susp. Req. min. 190" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req. min. 190" wb w/walking beam, HFS or HAS and 51" A/L tandem susp. Req. min. 202" wb w/55" Airliner tandem susp. Req. min. 208" wb w/59" Airliner tandem susp. Req. min. 202" wb w/54" Neway tandem susp. Req. min. 208" wb w/60" Neway tandem susp.	Req. min. 178" wb w/walking beam, 60" HAS or Neway and 51" A/L tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.
120 gal.	Dual	43GW00	43A000	43CR00	Not Available	Not Available	Req. min. 178 wb w/single rear axle Req, min. 202" wb w/walking beam, HFS or HAS and 51" A/L tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp. Req. min. 214" wb w/Neway tandem susp.	Req, min. 178" wb w/52"walking beam, HFS or 52" HAS and 51" A/L tandem susp. Req. min. 190" wb w/54" or 60" walking beam, 60" HAS or 54" or 60" Neway tandem susp. Req. min. 208" wb w/55" and 59" Airliner tandem susp.
150 gal.	Dual	N/A	43E600	43NX00	Not Available	Not Available	Req. min. 202" wb w/single rear susp. Req, min. 226" wb w/walking beam, HFS or HAS and 51" A/L tandem susp. Req. min. 238" wb w/Neway tandem susp. Req. min. 238" wb w/55" and 59" Airliner tandem susp.	Req. min. 178" wb w/w46" or 52" ML, TL or Neway and A/L single rear susp. Req. min. 202" wb w/Neway, Walking beam, HAS, HFS tandem susp. Req. min. 208" wb w/55" and 59" Airliner tandem susp.

(1) 4-battery/1-box availability:
• Avail. w/166" wb w/all single and 52" HAS/HFS tandem rear susp. • Avail. w/178 wb w/all single and Neway, Walking beam, HAS, and HFS tandem susp.
• N.A. w/190 wb • Avail. w/202" thru 262" wb w/all single and all tandem rear susp.

111" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/NON SLEEPER
LH TANK REAR MTD - RH TANK FORWARD MTD MIXED FUEL TANKS

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX: LH (29KE00) Standard Weight (29KD00) Light Weight N.A. w/4-battery system	UNDER CAB BATTERY BOX: LH & RH (29LG00) Standard Weight (29LJ00) Light Weight	AFT-OF-CAB BATTERY BOX: LH (29KF00) (N.A. w/4-battery system) LH & RH (29LL00) (Req. 4-battery system)	BETWEEN RAILS BATTERY BOX: (29KH00) (Available w/Tractor only and 196" wb max.)
SHALLOW MIXED RECTANGULAR								
30 gal. LH, 55 gal. RH	Mixed	43MD00	N/A	N/A	Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available	Not Available
55 gal. LH, 80 gal. RH	Mixed	43ME00	N/A	N/A	Req. min. 178" wb w/Neway tandem susp. Req. min. 190" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available	Not Available
DEEP MIXED RECTANGULAR								
50 gal. LH, 75 gal. RH	Mixed	43M600	N/A	N/A	Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available	Not Available
75 gal. LH, 100 gal. RH	Mixed	43M700	N/A	N/A	Req. min. 178" wb w/all tandem susp. Req. min. 190" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available	Not Available
CYLINDRICAL MIXED TANKS								
70 gal. LH, 100 gal. RH	Mixed	43ML00	43MT00	43NW00	Req. min. 178" wb w/54" or 60" walking beam, 60" HAS tandem or 54" or 60" Neway tandem susp. Req. min. 190" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available	Not Available
120 gal. LH, 150 gal. RH	Mixed	N/A	43MV00	43NY00	Req. min. 178" wb w/46" or 52" ML or TL or Neway and A/L single rear susp. Req. min. 184" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 208" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available	Not Available

111" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/NON SLEEPER
REAR MTD. FUEL TANK

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX: LH (29KE00) Standard Weight (29KD00) Light Weight (N.A. w/4-battery system)	UNDER CAB BATTERY BOX: LH & RH (29LH00) Standard Weight (29LK00) Light Weight (Req. 4-battery system)	AFT-OF-CAB BATTERY BOX: LH (29KF00) (N.A. w/4-battery system) LH & RH (29LL00) (Req. 4-battery system)	BETWEEN RAILS BATTERY BOX: (29KH00) (Available w/Tractor only and 196" wb max.)
SHALLOW RECTANGULAR								
55 gal.	RH LH Dual	43L700 43L800 43L900	N/A	N/A	Req. min. 178" wb w/60" Neway and 51" A/L tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req. min. 178" wb w/60" Neway and 51" A/L tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
80 gal.	RH LH Dual	43MB00 43MA00 43MC00	N/A	N/A	Req. min. 190" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req. min. 190" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
DEEP RECTANGULAR								
50 gal.	RH LH Dual	43MX00 43MW00 43MY00	N/A	N/A	Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
75 gal.	RH LH Dual	43M100 43M000 43M200	N/A	N/A	Req. min. 178" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req. min. 178" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
100 gal.	RH LH Dual	43M400 43N000 43M500	N/A	N/A	Req. min. 190" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req. min. 190" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available

111" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/NON SLEEPER
REAR MTD. FUEL TANK

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX
					LH (29KE00) Standard Weight (29KD00) Light Weight (N.A. w/4-battery system)	LH & RH (29LH00) Standard Weight (29LK00) Light Weight (Req. 4-battery system)	LH (29KF00) (N.A. w/4-battery system) LH & RH (29LL00) (Req. 4-battery system)	(29KH00) (Available w/Tractor only and 196" wb max.)
CYLINDRICAL TANK								
70 gal.	RH LH Dual	43MF00 43MG00 43MH00	43MM00 43MN00 43MP00	43NN00 43NM00 43NP00	Req. min. 178" wb w/54" or 60" walking beam, 60" HAS or 54" or 60" Neway and 51" A/L tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req. min. 178" wb w/54" or 60" walking beam, 60" HAS or 54" or 60" Neway tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
100 gal.	RH LH Dual	43MJ00 43LD00 43MK00	43FT00 43D200 43MR00	43NT00 43NR00 43NV00	Req. min. 190" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req, min. 190" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
120 gal.	Dual	43GW00	43A000	43CR00	Req. min. 178" wb w/46" or 52" M/L and T/L, Neway and Airliner Single susp. Req. min. 202" wb w/Airliner, Neway, Walking beam, HFS, HAS, tandem susp. Req. min. 208" w/55" and 59" Airliner tandem susp.	Req. min. 178" wb w/46" or 52" M/L and T/L, Neway and Airliner Single susp. Req. min. 202" wb w/Airliner, Neway, Walking beam, HFS, HAS, tandem susp. Req. min. 208" w/55" and 59" Airliner tandem susp.	Not Available	Not Available
150 gal.	Dual	N/A	43E600	43NX00	Req. min. 190" wb w/multi-leaf, taper leaf or Neway and A/L single rear susp. Req. min. 214" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req. min. 190" wb w/multi-leaf, taper leaf or Neway and A/L single rear susp. Req. min. 214" wb w/Neway, Walking beam, HAS, HFS, and Airliner 51" tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available

111" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/50" SLEEPER
FORWARD MTD. FUEL TANK

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX LH (29KE00) Standard Weight (29KD00) Light Weight	UNDER CAB BATTERY BOX RH (29LG00) Standard Weight (29LJ00) Light Weight	AFT-OF-CAB BATTERY BOX LH (29KF00) (N.A. w/4-battery system)	BETWEEN RAILS BATTERY BOX (29KH00)
CYLINDRICAL TANKS								
70 gal.	RH LH Dual	43MF00 43MG00 43MH00	43MM00 43MN00 43MP00	43NN00 43NM00 43NP00	Not Available w/LH or dual fuel tanks	Not Available w/RH or dual fuel tanks	Not Restricted	Not Available
100 gal.	RH LH Dual	43MJ00 43LD00 43MK00	43FT00 43D200 43MR00	43NT00 43NR00 43NV00	Not Available w/LH or dual fuel tanks	Not Available w/RH or dual fuel tanks	Req, min. 214" wb w/walking beam, HFS or HAS tandem susp. Req. min. 226" wb w/Neway and A/L tandem susp.	Not Available
120 gal.	Dual	43GW00	43A000	43CR00	Not Available	Not Available	Req, min. 214" wb w/walking beam, HFS or HAS, and 51" A/L tandem susp. Req. min. 226" wb w/Neway or 55" and 59" A/L tandem susp.	Not Available
150 gal.	Dual	N/A	43E600	43NX00	Not Available	Not Available	Req, min. 226" wb w/walking beam, HFS or HAS, and 51" A/L tandem susp. Req. min. 238" wb w/Neway or 55" and 59" A/L tandem susp.	Not Available

111" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/50" SLEEPER
LH TANK REAR MTD - RH TANK FORWARD MTD MIXED FUEL TANKS

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX
					LH (29KE00) Standard Weight (29KD00) Light Weight (N.A. w/4-battery system)	RH (29LG00) Standard Weight (29LJ00) Light Weight	LH (29KF00) (N.A. w/4-battery system) LH & RH (29LL00) (Req. 4-battery system)	LH (29KH00)
CYLINDRICAL MIXED TANKS								
70 gal. LH, 100 gal. RH	Mixed	43ML00	43MT00	43NW00	Not Restricted	Not Available	Not Available	Not Available
120 gal. LH, 150 gal. RH	Mixed	N/A	43MV00	43NY00	Req. min. 208" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available	Not Available

111" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/50" SLEEPER
REAR MTD. FUEL TANK

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX
					LH (29KE00) Standard Weight (29KD00) Light Weight (N.A. w/4-battery system)	LH & RH (29LH00) Standard Weight (29LK00) Light Weight (Req. 4-battery system)	LH (29KF00) (N.A. w/4-battery system) LH & RH (29LL00) (Req. 4-battery system)	LH (29KH00) (Available w/Tractor only and 196" wb max.)
CYLINDRICAL TANK								
70 gal.	RH LH Dual	43MF00 43MG00 43MH00	43MM00 43MN00 43MP00	43NN00 43NM00 43NP00	Not Restricted	Not Restricted	Not Available	Not Available
100 gal.	RH LH Dual	43MJ00 43LD00 43MK00	43FT00 43D200 43MR00	43NT00 43NR00 43NV00	Not Restricted	Not Restricted	Not Available	Not Available
120 gal.	Dual	43GW00	43A000	43CR00	Req. min. 208" wb w/55" and 59" Airliner tandem susp.	Not Restricted	Not Available	Not Available
150 gal.	Dual	N/A	43E600	43NX00	Req. min. 226" wb w/55" and 59" Airliner tandem susp. Req. min. 214" wb w/51" Airliner tandem susp.	Not Restricted	Not Available	Not Available

111" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/68" SLEEPER
FORWARD MTD. FUEL TANK

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX	BEWEEN RAILS BATTERY BOX
					LH (29KE00) Standard Weight (29KD00) Light Weight	RH (29LG00) Standard Weight (29LJ00) Light Weight	LH (29KF00) (N.A. w/4-battery system)	(29KH00)
CYLINDRICAL TANKS								
70 gal.	RH LH Dual	43MF00 43MG00 43MH00	43MM00 43MN00 43MP00	43NN00 43NM00 43NP00	Not Available w/LH or dual fuel tanks Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Not Available
100 gal.	RH LH Dual	43MJ00 43LD00 43MK00	43FT00 43D200 43MR00	43NT00 43NR00 43NV00	Not Available w/LH or dual fuel tanks Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Not Available
120 gal.	Dual	43GW00	43A000	43CR00	Not Available	Not Available	Req, min. 238" wb w/walking beam, HFS or HAS and 51" or 55" A/L tandem susp. Req. min. 250" wb w/Neway and 59" A/L tandem susp.	Not Available
150 gal.	Dual	N/A	43E600	43NX00	Not Available	Not Available	Req, min. 238" wb w/walking beam, HFS or HAS and 51" A/L tandem susp. Req. min. 250" wb w/Neway or Airliner 55" and 59" tandem susp.	Not Available

111" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/68" SLEEPER
LH TANK REAR MTD - RH TANK FORWARD MTD MIXED FUEL TANKS

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX
					LH (29KE00) Standard Weight (29KD00) Light Weight N.A. w/4-battery system	RH (29LG00) Standard Weight (29LJ00) Light Weight	LH (29KF00) (N.A. w/4-battery system) LH & RH (29LL00) (Req. 4-battery system)	LH (29KH00)
CYLINDRICAL MIXED TANKS								
70 gal. LH, 100 gal. RH	Mixed	43ML00	43MT00	43NW00	Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available	Not Available
120 gal. LH, 150 gal. RH	Mixed	N/A	43MV00	43NY00	Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available	Not Available

111" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/68" SLEEPER
REAR MTD. FUEL TANK

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX LH (29KE00) Standard Weight (29KD00) Light Weight (N.A. w/4-battery system)	UNDER CAB BATTERY BOX LH & RH (29LH00) Standard Weight (29LK00) Light Weight (Req. 4-battery system)	AFT-OF-CAB BATTERY BOX LH (29KF00) (N.A. w/4-battery system) LH & RH (29LL00) (Req. 4-battery system)	BETWEEN RAILS BATTERY BOX LH (29KH00)
CYLINDRICAL TANK								
70 gal.	RH LH Dual	43MF00 43MG00 43MH00	43MM00 43MN00 43MP00	43NN00 43NM00 43NP00	Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
100 gal.	RH LH Dual	43MJ00 43LD00 43MK00	43FT00 43D200 43MR00	43NT00 43NR00 43NV00	Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
120 gal.	Dual	43GW00	43A000	43CR00	Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available
150 gal.	Dual	N/A	43E600	43NX00	Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available

111" BBC
EXHAUST RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) EXHAUST AVAIL. w/NON-SLEEPER
FORWARD MTD FUEL TANKS

The chart below indicates exhaust restrictions by engine. Combination is not restricted unless indicated.

EXHAUST	CAT. C-10, C-12 CAT. 3306	CAT. 3406 CUM. N14 DDC-60
Single Horizontal Muffler & Pipe 32FD00 Req. 2-battery system when between-frame-rails battery box code 29KH00 is selected; N.A. w/HD or HT auto trans in comb. w/RH or dual mixed deep rect. fuel tanks; N.A. w/4-battery system aft-of-cab	Req. min. 178" wb w/Airliner single susp. Req. min. 190" wb w/walking beam, HFS, HAS or 54" Neway tandem susp. Req. min 202" wb w/60" Neway tandem susp. Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req.min. 178" wb w/spring, Airliner or HAS single rear susp. Req. min 190" wb w/Neway single susp. Req. min. 202" wb w/HFS tandem susp. Req. min. 208" wb w/52" or 54"walking beam, 51" A/L 52" HAS or 54" Neway tandem susp. Req. min. 214" wb w/60" Walking beam, 55" and 59" A/L, 60" HAS or 60" Neway tandem susp.
Single Horizontal Muffler & Vertical Outlet (Cab Mtd.) (over frame) 32FE00, 32FG00 Req. 2-battery system when between-frame-rails battery box code 29KH00 is selected; RH 4-battery/1 box Avail. w/Cat 3306 (Mech.) engine only; N.A. w/4-battery system aft-of-cab. N.A. w/HD auto trans in comb w/deep rect. RH or dual/mixed fuel tanks; N.A. w/HT-series auto trans.	Req. min. 178" wb w/Airliner single susp. Req. min. 178" wb w/HFS tandem susp. Req. min. 190" wb w/walking beam, HAS or Neway tandem susp. Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req. min. 178" wb w/single rear susp. Req. min. 202" wb w/any walking beam, HFS, HAS or 54" Neway tandem susp. Req. min. 208" wb w/60" Neway and 51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.
Single Horizontal Muffler & Vertical Outlet (Cab Mtd.) (under frame) 32FF00, 32FH00 Req. 2-battery system when between-frame-rails battery box code 29KH00 is selected; N.A. w/RH or dual/mixed fuel tanks; N.A. w/4 battery system aft-of-cab; N.A. w/RH mounted 4-battery/1 box	Req. min. 178" wb w/Airliner single susp. Req. min. 178" wb w/HFS tandem susp. Req. min. 190" wb w/walking beam, HAS or Neway tandem susp. Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req.min. 178" wb w/single rear susp. Req. min. 202" wb w/any walking beam, HFS, HAS or 54" Neway tandem susp. Req. min. 208" wb w/60" Neway and 51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.
Single Horizontal Muffler & Vertical Outlet (Frame Mtd.) (over frame) 32FJ00, 32FL00 Req. 2-battery system when between-frame- rails box code 29KH00 is selected; RH 4-battery/1-box Avail. w/Cat. 3306 (Mech.) engine only; N.A. w/HD auto trans in comb w/deep rect. RH or dual/mixed fuel tanks; N.A. w/any 75 gal. fuel tanks, mixed 50/75, 30/55 or 55/80 gal. fuel tanks; N.A. w/4-battery system aft-of-cab; N.A. w/HT-series auto trans.	Req. min. 178" wb w/Airliner single susp. Req. min. 178" wb w/HFS tandem susp. Req. min. 190" wb w/walking beam, HAS or Neway tandem susp. Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req.min. 178" wb w/single rear susp. Req. min. 202" wb w/any walking beam, HFS, HAS or 54" Neway tandem susp. Req. min. 208" wb w/60" Neway and 51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.
Single Horizontal Muffler & Vertical Outlet (Frame Mtd.) (under frame) 32FK00, 32FM00 Req 2-battery system when between-frame-rails battery box code 29KH00 is selected. N.A. w/any 75 gal. fuel tank; N.A. w/RH or dual/mixed fuel tanks; N.A. w/4 battery system aft-of-cab;	Req. min. 178" wb w/Airliner single susp. Req. min. 178" wb w/HFS tandem susp. Req. min. 190" wb w/walking beam, HAS or Neway tandem susp. Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req.min. 178" wb w/single rear susp. Req. min. 202" wb w/anywalking beam, HFS, HAS or 54" Neway tandem susp. Req. min. 208" wb w/60" Neway and 51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.
Single Horizontal Muffler & Dual Vertical Outlet (Cab Mtd.) (over frame) 32F100 N.A. w/HD auto trans. in combination w/deep rectangular RH or dual/mixed fuel tanks; N.A. w/HT-series auto trans. N.A. w/4 battery system aft-of-cab; N.A. w/ between-the-frame rails battery box; N.A. w/LH 4-battery/1-box; RH 4-battery/1box Avail. w/3306 (Mech.) engine only.	Req. min. 178" wb w/Airliner single susp. Req. min. 178" wb w HFS tandem susp. Req. min. 190" wb w/walking beam, HAS or Neway tandem susp. Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req.min. 178" wb w/single rear susp. Req. min. 202" wb w/walking beam, HFS, HAS or 54" Neway tandem susp. Req. min. 208" wb w/60" Neway and 51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.

Continued on next page

111" BBC
EXHAUST RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) EXHAUST AVAIL. w/NON SLEEPER
FORWARD MTD FUEL TANKS (continued)

The chart below indicates exhaust restrictions by engine. Combination is not restricted unless indicated.

EXHAUST	CAT. C-10, C-12 CAT. 3306	CAT. 3406 CUM. N14 DDC-60
Single Horizontal Muffler & Dual Vertical Outlet (Frame Mtd.) (over frame) 32F200 N.A. w/HD auto trans. in comb. w/deep rectangular RH or dual/mixed fuel tanks; N.A. w/any 75 gal. fuel tanks, mixed 30/55, 55/80 or 50/75 gal. fuel tanks; N.A. w/between-the-frame rails battery box; N.A. w/4-battery system aft-of-cab; N.A. w/HT-series auto trans.; RH 4-battery/1-box Avail. w/Cat. 3306 (Mech.) engine only; N.A. w/LH 4-battery/1-box	Req. min. 178" wb w HFS tandem susp. Req. min. 190" wb w/walking beam, HAS or Neway tandem susp. Req. min. 178" wb w/Airliner single susp. Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req.min. 178" wb w/single rear susp. Req. min. 202" wb w/walking beam, HFS, HAS or 54" Neway tandem susp. Req. min. 208" wb w/60" Neway and 51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.
Single Vertical Muffler & Vertical Outlet (cab mtd.) 32FW00, 32FX00 N.A. w/RH Clean CA fuel tanks	Not Restricted to engines	Not Restricted to engines
Single Vertical Muffler & Vertical Outlet (frame mtd.) 32FY00, 32F000 N.A. w/75 gal. fuel tank, mixed 50/75, 30/55 or 55/80 gal. fuel tanks; N.A. w/80 gal. shallow RH or dual rect. tanks; N.A. w/55 gal. fuel tanks; N.A. w/RH Clean CA	Not Restricted to engines	Not Restricted to engines
Single Transverse Muffler & Horizontal Outlet (under frame) 32FN00 Req. min. 190" wb w/all tandem susp.; N.A. w/RH or dual/mixed fuel tanks; N.A. w/4-battery system aft-of-cab	Not Restricted to engines Req. min. 178" wb w/Airliner single susp.	Not Restricted to engines Req. min. 178" wb w/Airliner single susp.
Single Transverse Muffler & vertical Outlet (cab mtd.) 32FP00, 32FR00 Req. min. 178" wb w/all tandem susp.; N.A. w/RH or dual/mixed fuel tanks; N.A. w/RH 4-battery box; N.A. w/4-battery system aft-of-cab	Not Restricted to engines Req. min. 178" wb w/Airliner single susp.	Not Restricted to engines Req. min. 178" wb w/Airliner single susp.

111" BBC
EXHAUST RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) EXHAUST AVAIL. w/NON SLEEPER
REAR MTD FUEL TANKS

The chart below indicates exhaust restrictions by engine. Combination is not restricted unless indicated.

EXHAUST	CAT. C -10, C-12 CAT. 3306 CUM. M11	CAT. 3406 CUM. N14 DDC-60
Single Horizontal Muffler & Pipe 32FD00 N.A. w/HD & HT auto trans in comb. w/RH or dual/mixed deep rect. fuel tanks;	Req.min. 190" wb w/ walking beam, HFS, HAS or 54" Neway tandem susp. Req. min. 202" wb w/60 Neway tandem susp. Req. min. 178" wb w/Airliner single susp. Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req.min. 178" wb w/spring, Airliner or HAS single rear susp. Req. min 190" wb w/Neway single susp. Req. min. 202" wb w/HFS tandem susp. Req. min. 208" wb w/52" or 54" walking beam, 51" Airliner, 52" HAS or 54" Neway tandem susp. Req. Min. 214" wb w/60" Walking beam, 60" HAS or, 55" or 59" Airliner, 60" Neway tandem susp.
Single Horizontal Muffler & Vertical Outlet (Cab Mtd.) (over frame) 32FE00, 32FG00 N.A. w/HD auto trans in comb w/deep rect. RH or dual/mixed fuel tanks; N.A w/HT-series auto trans.	Req. min. 178" wb w/HFS tandem susp. Req. min. 190" wb w/walking beam, HAS or Neway tandem susp. Req. min. 178" wb w/Airliner single susp. Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req.min. 178" wb w/single rear susp. Req. min. 202" wb w/any walking beam, HFS, HAS or 54" Neway tandem susp. Req. min. 208" wb w/60" Neway and 51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.
Single Horizontal Muffler & Vertical Outlet (Cab Mtd.) (under frame) 32FF00, 32FH00 N.A. w/RH or dual/mixed fuel tanks	Req. min. 178" wb w/HFS tandem susp. Req. min. 190" wb w/walking beam, HAS or Neway tandem susp. Req. min. 178" wb w/Airliner single susp. Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req.min. 178" wb w/single rear susp. Req. min. 202" wb w/any walking beam, HFS, HAS or 54" Neway tandem susp. Req. min. 208" wb w/60" Neway and 51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.
Single Horizontal Muffler & Vertical Outlet (Frame Mtd.) (over frame) 32FJ00, 32FL00 N.A. w/HD auto trans in comb w/deep rect. RH or dual/mixed fuel tanks; N.A. w/any 50 gal. rectangular fuel tanks; N.A. w/mixed 50/75, 30/55 or 55/80 gal. fuel tanks; N.A. w/HT-series auto trans.	Req. min. 178" wb w/HFS tandem susp. Req. min. 190" wb w/walking beam, HAS or Neway tandem susp. Req. min. 178" wb w/Airliner single susp. Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req.min. 178" wb w/single rear susp. Req. min. 202" wb w/any walking beam, HFS, HAS or 54" Neway tandem susp. Req. min. 208" wb w/60" Neway and 51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.
Single Horizontal Muffler & Vertical Outlet (Frame Mtd.) (under frame) 32FK00, 32FM00 N.A. w/any 50 gal. rectangular fuel tanks; N.A. w/RH or dual/mixed fuel tanks;	Req. min. 178" wb w/HFS tandem susp. Req. min. 190" wb w/walking beam, HAS or Neway tandem susp. Req. min. 178" wb w/Airliner single susp. Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req.min. 178" wb w/single rear susp. Req. min. 202" wb w/any walking beam, HFS, HAS or 54" Neway tandem susp. Req. min. 208" wb w/60" Neway and 51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.
Single Horizontal Muffler & Dual Vertical Outlet (Cab Mtd.) (over frame) 32F100 N.A. w/HD auto trans. in combination w/deep rectangular RH or dual/mixed fuel tanks; N.A. w/HT-series auto trans.	Req. min. 178" wb w HFS tandem susp. Req. min. 190" wb w/walking beam, HAS or Neway tandem susp. Req. min. 178" wb w/Airliner single susp. Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req.min. 178" wb w/single rear susp. Req. min. 202" wb w/any walking beam, HFS, HAS or 54" Neway tandem susp. Req. min. 208" wb w/60" Neway and 51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.

continued on next page

111" BBC
EXHAUST RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) EXHAUST AVAIL. w/NON SLEEPER
REAR MTD FUEL TANKS (continued)

The chart below indicates exhaust restrictions by engine. Combination is not restricted unless indicated.

EXHAUST	CAT. C-10, C-12 CAT. 3306	CAT. 3406 CUM. N14 DDC-60
Single Horizontal Muffler & Dual Vertical Outlet (Frame Mtd.) (over frame) 32F200 N.A. w/HD auto trans. in combination w/deep rectangular RH or dual/mixed fuel tanks; N.A. w/any 50 gal. rectangular fuel tank; N.A w/ HT-series auto trans.	Req. min. 178" wb w/HFS tandem susp. Req. min. 190" wb w/walking beam, HAS or Neway tandem susp. Req. min. 178" wb w/Airliner single susp. Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req.min. 178" wb w/single rear susp. Req. min. 202" wb w/any walking beam, HFS, HAS or 54" Neway tandem susp. Req. min. 208" wb w/60" Neway and 51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.
Single Vertical Muffler & Vertical Outlet (Cab Mtd.) 32FW00, 32FX00 N.A. w/RH clean CA fuel tanks	Not Restricted to engines	Not Restricted to engines
Single Vertical Muffler & Vertical Outlet (Frame Mtd.) 32FY00, 32F000 N.A. w/50 gal. rectangular fuel tank; N.A w/55 gal. RH or dual fuel tanks; N.A. w/mixed 50/75, 30/55 or 55/80 gal. fuel tanks; N.A w/ clean CA fuel tanks	Not Restricted to engines	Not Restricted to engines
Single Transverse Muffler & Horizontal Outlet (under frame) 32FN00 Req. min. 190" wb w/tandem axles.; N.A. w/RH or dual/mixed fuel tanks	Not Restricted to engines Req. min. 178" wb w/Airliner single susp.	Not Restricted to engines Req. min. 178" wb w/Airliner single susp.
Single Transverse Muffler & Vertical Outlet (Cab Mtd.) 32FP00, 32FR00 Req. min. 178" wb w/tandem axle.; N.A. w/RH or dual/mixed fuel tanks	Not Restricted to engines Req. min. 178" wb w/Airliner single susp. Req. min. 190" wb w/Airliner tandem susp.	Not Restricted to engines Req. min. 178" wb w/Airliner single susp. Req. min. 190" wb w/Airliner tandem susp.

111" BBC
EXHAUST RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) EXHAUST AVAIL. w/50" SLEEPER FORWARD MTD. FUEL TANKS

The chart below indicates exhaust restrictions by engine. Combination is not restricted unless indicated.

EXHAUST	CAT. C-10, C-12 CAT. 3306	CAT. 3406 CUM. N14 DDC-60
Single Horizontal Muffler and Pipe (under frame) 32FD00 N.A. w/4-battery system aft-of-cab or RH aft-of-cab battery box	Not restricted to engines Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req. min. 208" wb w/52 walking beam, 51" Airliner 52" HAS or 54" Neway tandem susp. Req. min. 214" wb w/60' walking beam, 55" and 59" Airliner, 60" HAS tandem or 60" Neway tandem susp.
Dual Horizontal Muffler and Dual Bright Vertical Outlets (frame mtd.) (under frame) 32F300 N.A. w/ aft-of-cab battery box; N.A. w/150 gal. fuel tank; N.A. w/226" wb in comb. w/120 gal. fuel tank and all single rear susp.;	Not Restricted to engines Req. min. 214" wb w/all Airliner tandem susp.	N.A. w/auto trans. Req. min. 214" wb w/all Airliner tandem susp.
Single Horizontal Muffler & Vertical Outlet (frame mtd.) (under frame) 32FK00, 32FM00 N.A. w/4-battery system aft-of-cab (29LL00;) N.A. w/RH aft-of-cab battery box	Not Restricted to engines Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req. min. 214" wb w/60" Neway tandem susp. Req. min. 214" wb w/120 gal. cylindrical fuel tank Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.

111" BBC
EXHAUST RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) EXHAUST AVAIL. w/50" SLEEPER
REAR MTD. FUEL TANKS

The chart below indicates exhaust restrictions by engine. Combination is not restricted unless indicated.

EXHAUST	CAT. C-10, C-12 CAT. 3306	CAT. 3406 CUM. N14 DDC-60
Single Horizontal Muffler and Pipe (under frame) 32FD00	Not Restricted to engines Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req. min. 208" wb w/52 walking beam, 51" Airliner 52" HAS or 54" Neway tandem susp. Req. min. 214" wb w/60' walking beam, 55" and 59" Airliner, 60" HAS tandem or 60" Neway tandem susp.
Dual Horizontal Muffler and Dual Bright Vertical Outlets (frame mtd.) (under frame) 32F300 Req. min. 226" wb in comb. w/120 gal. fuel tank, back of cab access pkg. and tandem rear susp. N.A. in comb. w/120 gal. fuel tank, back of cab access pkg. and 60" HAS tandem rear susp. N.A. w/150 gal. cyl. fuel tank N.A. w/226" wb in comb. w/120 gal. fuel tank and all single rear susp.	Not Restricted to engines Req. min. 214" wb w/all Airliner tandem susp.	N.A. w/auto trans. Req. min. 214" wb w/all Airliner tandem susp.
Single Horizontal Muffler & Vertical Outlet (frame mtd.) (under frame) 32FK00, 32FM00 N.A. w/150 gal.fuel tank	Not Restricted to engines Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req. Min. 214" wb w/60" Neway tandem susp. Req. Min. 214" wb w/120 gal. cylindrical fuel tank Req. min. 208" wb w/51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.

111" BBC
EXHAUST RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) EXHAUST AVAIL. w/68" SLEEPER FORWARD MTD. FUEL TANKS

The chart below indicates exhaust restrictions by engine. Combination is not restricted unless indicated.

EXHAUST	CAT. C-10, C-12 CAT. 3306	CAT. 3406 CUM. N14 DDC-60
Single Horizontal Muffler and Pipe (under frame) 32FD00 N.A. w/4-battery system aft-of-cab or RH aft-of-cab battery box	Not Restricted to engines	Not Restricted to engines
Dual Horizontal Muffler and Dual Bright Vertical Outlets (frame mtd.) (under frame) 32F300 N.A. w/aft-of-cab battery box	Not Restricted to engines	N.A. w/auto trans
Single Horizontal Muffler & Vertical Outlet (frame mtd.) (under frame) 32FK00, 32FM00 Req. min. 226" wb w/150 gal. cylindrical tanks; N.A. w/4-battery system aft-of-cab or RH aft-of-cab battery box	Not Restricted to engines	Not Restricted to engines

111" BBC
EXHAUST RESTRICTIONS
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) EXHAUST AVAIL. w/68" SLEEPER
REAR MTD. FUEL TANKS

The chart below indicates exhaust restrictions by engine. Combination is not restricted unless indicated.

EXHAUST	CAT. C-10, C-12 CAT. 3306	CAT. 3406 CUM. N14 DDC-60
Single Horizontal Muffler and Pipe (under frame) 32FD00	Not Restricted to engines	Not Restricted to engines
Dual Horizontal Muffler and and Dual Bright Vertical Outlets (frame mtd.) (under frame) 32F300 Req. min. 226" wb in comb. w/120 gal. fuel tank, back of cab access pkg. and tandem rear susp.	Not Restricted to engines	N.A. w/auto trans.
Single Horizontal Muffler & Vertical Outlet (frame mtd.) (under frame) 32FK00, 32FM00 Req. min. 226" wb w/150 gal. cylindrical tanks;	Not Restricted to engines	Not Restricted to engines

111" BBC
QUARTER FENDER* RESTRICTIONS
(Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/NON-SLEEPER
FORWARD MTD. FUEL TANK

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

Fuel Tank		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
SHALLOW RECTANGULAR								
55 gal.	RH LH Dual	43L700 43L800 43L900	N/A	N/A	Req. min. 178" wb w/60" Walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 190" wb w/55" and 59" Airliner tandem susp.	Req. min. 178" wb w/60" Walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 190" wb w/55" and 59" Airliner tandem susp.	Req. min. 178" wb w/60" Walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 190" wb w/55" and 59" Airliner tandem susp.	Req. min. 178" wb w/all 60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 190" wb w/60" Neway or Airliner 55" and 59" tandem susp.
80 gal.	RH LH Dual	43MB00 43MA00 43MC00	N/A	N/A	Req. min. 190" wb w/60" Walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req. min. 190" wb w/60" Walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req. min. 178" wb w/60" Walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 190" wb w/55" and 59" Airliner tandem susp.	Req. min. 190" wb w/all 60" Walking beam or 60" HAS or 51" Airliner tandem susp. w/under cab or aft-of-cab battery box Req. min. 178" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. w/between rails battery box Req. min. 202" wb w/60" Neway or 55" and 59" tandem susp. w/under cab or aft-of-cab battery box Req. min. 190" wb w/60" Neway or 55" and 59" tandem susp. w/between rails battery
DEEP RECTANGULAR								
75 gal.	RH LH Dual	43M100 43M000 43M200	N/A	N/A	Req. min. 178" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 190" wb w/60" Neway or Airliner 55" and 59" tandem susp.	Req. min. 178" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 190" wb w/60" Neway or Airliner 55" and 59" tandem susp.	Req. min. 178" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 190" wb w/60" Neway or Airliner 55" and 59" tandem susp.	Req. min. 190" wb w/all 60" Walking beam or 60" HAS or 51" Airliner tandem susp. w/under cab or aft-of-cab battery box Req. min. 202" wb w/55" and 59" Airliner tandem susp. w/ under cab or aft of cab battery box Req. min. 178" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 190" wb w/60" Neway or Airliner 55" and 59" tandem susp.
100 gal.	RH LH Dual	43M400 43N000 43M500	N/A	N/A	Req. min. 190" wb w/60" Walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req. min. 202" wb w/60" walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req. min. 178" wb w/60" Walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 190" wb w/55" and 59" Airliner tandem susp.	Req. min. 190" wb w/all 60" Walking beam or 60" HAS or 51" Airliner tandem susp. w/under cab or aft-of-cab battery box Req. min. 214" wb w/55" and 59" Airliner tandem susp. w/ under cab or aft of cab battery box Req. min. 178" wb w/60" Walking beam or 60" HAS tandem susp. w/between rails battery box Req. min. 202" wb w/60" Neway tandem susp. w/under cab or aft-of-cab battery box Req. min. 190" wb w/60" Neway tandem susp. w/between rails battery box Req. min. 190" wb w/55" and 59" Airliner tandem susp. w/ under cab or aft of cab battery box

*** Avail. w/Tractor only**

111" BBC
QUARTER FENDER* RESTRICTIONS
(Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/NON-SLEEPER
FORWARD MTD. FUEL TANK

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

Fuel Tank		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
CYLINDRICAL TANKS								
70 gal.	RH LH Dual	43MF00 43MG00 43MH00	43MM00 43MN00 43MP00	43NN00 43NM00 43NP00	Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb /55" and 59" Airliner tandem susp.	Req. min. 190" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 202" wb w/60" Neway or Airliner 55" and 59" tandem susp.	Req. min. 202" wb w/55" and 59" Airliner tandem susp. Req. min. 178" wb w/51" Airliner tandem susp.	Req. min. 190" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.
100 gal.	RH LH Dual	43MJ00 43LD00 43MK00	43FT00 43D200 43MR00	43NT00 43NR00 43NV00	Req. min. 178" wb w/51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req. min. 202" wb w/60" walking beam or 60" HAS tandem susp. Req. min. 196" wb w/60" Neway or Airliner tandem susp.	Req. min. 190" wb w/60" Walking beam, 60" HAS tandem or 60" Neway or 51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	Req. min. 190" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.
120 gal.	Dual	43GW00	43A000	43CR00	N/A	Req. min. 178" wb w/ single susp. Req. min. 214" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 226" wb w/60" Neway or Airliner 55" and 59" tandem susp.	Req. min. 202" wb w/60" Walking beam, 60" HAS tandem or 60" Neway or 51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	Req. min. 190" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.
150 gal.	Dual	N/A	43E600	43NX00	N/A	Req. min. 238" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 250" wb w/60" Neway or Airliner 55" and 59" tandem susp.	Req. min. 214" wb w/60" Walking beam, 60" HAS tandem or 60" Neway or 51" Airliner tandem susp. Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Req. min. 190" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 226" wb w/55" and 59" Airliner tandem susp.

*** Avail. w/Tractor only**

111" BBC
QUARTER FENDER* RESTRICTIONS
(Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/NON-SLEEPER
LH TANK REAR MTD - RH TANK FORWARD MTD MIXED FUEL TANKS

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

Fuel Tank		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
SHALLOW MIXED RECTANGULAR								
30 gal. LH, 55 gal. RH	Mixed	43MD00	N/A	N/A	Req. min. 190" wb w/all 60" tandem susp. Req. min. 190" wb w/Airliner tandem susp.	Not Available	Not Available	Req. min. 178" wb w/all 60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 190" wb w/60" Neway or Airliner 55" and 59" tandem tandem susp.
55 gal. LH, 80 gal. RH	Mixed	43ME00	N/A	N/A	Req. min. 190" wb w/all 60" tandem susp. Req. min. 202" wb w/Airliner tandem susp.	Not Available	Not Available	Req. min. 190" wb w/all 60" Walking beam or 60" HAS or 51" Airliner tandem susp. w/under cab or aft-of-cab battery box Req. min. 202" wb w/60" Neway tandem or Airliner 55" and 59" susp. w/under cab or aft-of-cab battery box
DEEP MIXED RECTANGULAR								
50 gal. LH, 75 gal. RH	Mixed	43M600	N/A	N/A	Req. min. 190" wb w/all 60" tandem susp. Req. min. 190" wb w/Airliner tandem susp.	Not Available	Not Available	Req. min. 190" wb w/all 60" Walking beam or 60" HAS or 51" Airliner tandem susp. w/under cab or aft-of-cab battery box Req. min. 190" wb w/60" Neway or Airliner 55" and 59" tandem susp.
75 gal. LH, 100 gal. RH	Mixed	43M700	N/A	N/A	Req. min. 202" wb w/all 60" tandem susp. Req. min. 202" wb w/Airliner tandem susp.	Not Available	Not Available	Req. min. 190" wb w/all 60" Walking beam or 60" HAS or 51" Airliner tandem susp. w/under cab or aft-of-cab battery box Req. min. 202" wb w/60" Neway or Airliner 55" and 59" tandem susp. w/under cab or aft-of-cab battery box
MIXED CYLINDRICAL TANKS								
70 gal. LH, 100 gal. RH	Mixed	43ML00	43MT00	43NW00	Req. min. 202" wb w/60" Walking beam or 60" HAS or Airliner tandem susp. Req. min. 214" wb w/60" Neway tandem susp.	Not Available	Not Available	Req. min. 190" wb w/60" Walking beam or 60" HAS or Airliner tandem susp.
120 gal. LH, 150 gal. RH	Mixed	N/A	43MV00	43NY00	Req. min. 238" wb w/60" Walking beam or 60" HAS or Airliner tandem susp. Req. min.250" wb w/60" Neway tandem susp.	Not Available	Not Available	Req. min. 190" wb w/60" Walking beam or 60" HAS or Airliner tandem susp.

*** Avail. w/Tractor only**

111" BBC
QUARTER FENDER* RESTRICTIONS
(Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/NON-SLEEPER
REAR MTD. FUEL TANK

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
SHALLOW RECTANGULAR								
55 gal. 80 gal.	RH LH Dual	43L700 43L800 43L900	N/A	N/A	Req. min. 178" wb w/60" walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 190" wb w/55" and 59" Airliner tandem susp.	N/A	Not Available	Req. min. 190" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. w/under cab battery box Req. min. 202" wb w/55" and 59" Airliner tandem susp. w/ under cab battery box
	RH LH Dual	43MB00 43MA00 43MC00	N/A	N/A	Req. min. 190" wb w/60" walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	N/A	Not Available	Req. min. 190" wb w/60" Walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.
DEEP RECTANGULAR								
50 gal.	RH LH Dual	43MX00 43MW00 43MY00	N/A	N/A	Req. min. 178" wb w/60" walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 190" wb w/55" and 59" Airliner tandem susp.	N/A	Not Available	Req. min. 190" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. w/LH or dual fuel tanks Req. min. 178" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. w/RH fuel tanks Req. min. 190" wb w/60" Neway or Airliner 55" and 59" tandem susp.
75 gal.	RH LH Dual	43M100 43M000 43M200						
100 gal.	RH LH Dual	43M400 43N000 43M500	N/A	N/A	Req. min. 190" wb w/60" walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	N/A	Not Available	Req. min. 190" wb w/60" Walking beam or 60" HAS, or 60" Neway or 51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.

* **Avail. w/Tractor only**

111" BBC
QUARTER FENDER* RESTRICTIONS
(Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/NON-SLEEPER
REAR MTD. FUEL TANK

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
CYLINDRICAL TANKS								
70 gal.	RH LH Dual	43MF00 43MG00 43MH00	43MM00 43MN00 43MP00	43NN00 43NM00 43NP00	Req. min. 190" wb w/60" walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.	N/A	Not Available	Req. min. 190" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 202" wb w/55" and 59" Airliner tandem susp.
100 gal.	RH LH Dual	43MJ00 43LD00 43MK00	43FT00 43D200 43MR00	43NT00 43NR00 43NV00	Req. min. 202" wb w/60" walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.	N/A	Not Available	Req. min. 190" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 214" wb w/55" and 59" Airliner tandem susp.
120 gal.	Dual	43GW00	43A000	43CR00	Req. min. 178" wb w/single rear susp. Req. min. 214" wb w/60" walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 226" wb w/55" and 59" Airliner tandem susp.	N/A	Not Available	Req. min. 190" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 226" wb w/55" and 59" Airliner tandem susp.
150 gal.	Dual	N/A	43E600	43NX00	Req. min. 190" wb w/single susp. Req. min. 226" wb w/60" walking beam, 60" HAS or 60" Neway or 51" Airliner tandem susp. Req. min. 238" wb w/55" and 59" Airliner tandem susp.	N/A	Not Available	Req. min. 190" wb w/60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 238" wb w/55" and 59" Airliner tandem susp.

*** Avail. w/Tractor only**

111" BBC
QUARTER FENDER* RESTRICTIONS
(Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/SLEEPER
FORWARD MTD. FUEL TANKS

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
CYLINDRICAL TANKS								
70 gal.	RH** LH Dual**	43MF00 43MG00 43MH00	43MM00 43MN00 43MP00	43NN00 43NM00 43NP00	**50" Sleeper** Req. min. 214" wb w/51" Airliner tandem susp. Req. min. 226" wb w/55" and 59" Airliner tandem susp. **68" Sleeper** Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available w/sleeper	**50" Sleeper** Req. min. 214" wb w/Airliner single susp. Req. min. 226" wb w/all tandem susp. Req. min. 238" wb w/Airliner tandem susp. **68" Sleeper** Req. min. 226" wb w/52" or 54" Walking beam or HFS tandem susp. Req. min. 238" wb w/60" Walking beam or HAS or Neway and Airliner tandem susp.
100 gal.	RH LH Dual	43MJ00 43LD00 43MK00	43FT00 43D200 43MR00	43NT00 43NR00 43NV00	**50" Sleeper** Req. min. 226" wb w/ 60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 238" wb w/60" Neway or Airliner 55" and 59" tandem susp. **68" Sleeper** Req. min. 226" wb w/55" and 59" Airliner tandem susp.	**50" Sleeper** Req. min. 226" wb w/ 60" Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min. 238" wb w/60" Neway or Airliner 55" and 59" tandem susp. **68" Sleeper** Req. min. 226" wb w/55" and 59" Airliner tandem susp.	Not Available w/sleeper	**50" Sleeper** Req. min. 214" wb w/Airliner single susp. Req. min. 226" wb w/all tandem susp. Req. min. 238" wb w/51" Airliner tandem susp. Req. min. 250" wb w/55" and 59" Airliner tandem susp. **68" Sleeper** Req. min. 226" wb w/52" or 54" Walking beam or HFS tandem susp. Req. min. 238" wb w/60" Walking beam or HAS or Neway and 51" A/L tandem susp. Req. min. 250" wb w/55" and 59" Airliner tandem susp.
120 gal.	Dual	43GW00	43A000	43CR00	Not Available	**50" Sleeper** Req. min. 226" wb w/ 60" HAS or 51" Airliner tandem Req. min. 238" wb w/60" Neway or Airliner 55" and 59" tandem susp. **68" Sleeper** Req. min. 250" wb w/ 60" Walking Beam or 60" Neway or 51" Airliner tandem susp. Req. min. 262" wb w/Neway or Airliner 55" and 59" tandem susp.	Not Available w/sleeper Not Available w/sleeper	**50" Sleeper** Req. min. 214" wb w/Airliner single susp. Req. min. 226" wb w/all tandem susp. Req. min. 238" wb w/51" Airliner tandem susp. Req. min. 250" wb w/55" and 59" Airliner tandem susp. **68" Sleeper** Req. min. 226" wb w/52" or 54" Walking beam or HFS tandem susp. Req. min. 238" wb w/60" Walking beam or HAS tandem or Neway tandem susp. Req. min. 250" wb w/51" Airliner tandem susp. Req. min. 262" wb w/55" and 59" Airliner tandem susp.

*** Avail. w/Tractor only**

*** * N.A. on 208" wb w/50" Able Slpr. in comb. with rear mnt. fuel tanks**

111" BBC
QUARTER FENDER* RESTRICTIONS
(Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/SLEEPER
FORWARD MTD. FUEL TANKS

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
CYLINDRICAL TANKS								
150 gal.	Dual	N/A	43E600	43NX00	Not Available	**50" Sleeper** Req. min. 226" wb w/ 60" HAS or 51" Airliner tandem Req. min. 238" wb w/60" Neway or Airliner 55" and 59" tandem susp. **68" Sleeper** Req. min. 250" wb w/ 60" Walking Beam or 60" HAS or 51" Airliner tandem susp. Req. min. 262" wb w/Neway or Airliner 55" and 59" tandem susp.		**50" Sleeper** Req. min. 214" wb w/Airliner single susp. Req. min. 226" wb w/all tandem susp. Req. min. 238" wb w/51" Airliner tandem susp. Req. min. 250" wb w/55" and 59" Airliner tandem susp. **68" Sleeper** Req. min. 226" wb w/52" or 54" Walking beam or HFS tandem susp. Req. min. 238" wb w/60" Walking beam or HAS tandem or Neway tandem susp. Req. min. 250" wb w/51" Airliner tandem susp. Req. min. 262" wb w/55" and 59" Airliner tandem susp.

111" BBC
QUARTER FENDER* RESTRICTIONS
(Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/SLEEPER
LH TANK REAR MTD - RH TANK FORWARD MTD MIXED FUEL TANKS

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

Fuel Tank		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
MIXED CYLINDRICAL TANKS								
70 gal. LH, 100 gal. RH	Mixed	43ML00	43MT00	43NW00	**50" and 68" Sleeper** Req. min. 226" wb w/ 60"Walking beam or 60" HAS or 51" Airliner tandem susp. Req. min 238 " wb w/60" Neway or Airliner 55" and 59" tandem susp.	Not Available	Not Available	**50" and 68" Sleeper** Req. min. 214" wb w/Airliner single susp. Req. min. 226" wb w/52" or 54" Walking beam or HFS or 51" Airliner tandem susp Req. min. 238" wb w/60" Walking beam, HAS, Neway or Airliner 55" and 59" tandem susp.
120 gal. LH, 150 gal. RH	Mixed	N/A	43MV00	43NY00	**50"and 68" Sleeper** Req. min. 238" wb w/all tandem susp.	Not Available	Not Available	**50" and 68" Sleeper** Req. min. 226" wb w/52" or 54" Walking beam, HFS or 51" Airliner tandem susp Req. min. 238" wb w/60" Walking beam, HAS, Neway or Airliner 55" and 59" tandem susp.

*** Avail. w/Tractor only**

111" BBC
QUARTER FENDER* RESTRICTIONS
(Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/LT9511 Heavy Duty Diesel (4x2 & 6x4) w/SLEEPER
REAR MTD. FUEL TANKS

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
CYLINDRICAL TANKS								
70 gal.	RH LH Dual	43MF00 43MG00 43MH00	43MM00 43MN00 43MP00	43NN00 43NM00 43NP00	Not Restricted	Not Available	Not Available w/sleeper	**50" Sleeper** Req. min. 214" wb w/Airliner single susp. Req. min. 226" wb w/all tandem susp. Req. min. 238" wb w/55" and 59" Airliner tandem susp. **68" Sleeper** Req. min. 226" wb w/52" or 54" Walking beam or HFS tandem susp. Req. min. 238" wb w/60" Walking beam or HAS tandem or Neway or Airliner tandem susp.
100 gal.	RH LH Dual	43MJ00 43LD00 43MK00	43FT00 43D200 43MR00	43NT00 43NR00 43NV00	Not Restricted	Not Available	Not Available w/sleeper	**50" Sleeper** Req. min. 214" wb w/Airliner single susp. Req. min. 226" wb w/all tandem susp. **68" Sleeper** Req. min. 226" wb w/52" or 54" Walking beam or HFS tandem susp. Req. min. 238" wb w/60" Walking beam or HAS tandem or Neway or 51" Airliner tandem susp. Req. min. 250" wb w/55" and 59" Airliner tandem susp.
120 gal.	Dual	43GW00	43A000	43CR00	**50" Sleeper** Req. min. 226" wb w/60" Neway or 51" Airliner tandem susp. Req. min. 238" wb w/55" and 59" Airliner tandem susp. **68" Sleeper** Req. min. 238" wb w/51" Airliner tandem susp. Req. min. 250" wb w/55" and 59" Airliner tandem susp.	Not Available	Not Available w/sleeper	**50" Sleeper** Req. min. 214" wb w/Airliner single susp. Req. min. 226" wb w/all tandem susp. Req. min. 238" wb w/55" and 59" A/L tandem susp. **68" Sleeper** Req. min. 226" wb w/52" or 54" Walking beam or HFS tandem susp. Req. min. 250" wb w/55" and 59" Airliner tandem susp.
150 gal.	Dual	N/A	43E600	43NX00	**50" Sleeper** Req. min. 226" wb w/60" Walking beam or 60" HAS or A/L tandem susp.; Req. min. 250" wb w/60" Neway or 55" and 59" A/L tandem susp. **68" Sleeper** Req. min. 250" wb w/60" Neway or A/L tandem susp. Req. min. 262" wb w/55" and 59" Airliner	Not Available	Not Available w/sleeper	**50" Sleeper** Req. min. 214" wb w/Airliner single susp. Req. min. 226" wb w/all tandem susp. Req. min. 250" wb w/55" and 59" Airliner tandem susp. **68" Sleeper** Req. min. 226" wb w/52" or 54" Walking beam or HFS tandem susp. Req. min. 238" wb w/60" Walking beam or HAS tandem susp. Req. min. 250" wb w/60" Neway or 51" A/L tandem susp. Req. min. 262" wb w/55" and 59" Airliner tandem susp.

* **Avail. w/Tractor only**

111" BBC
AIRLINER SINGLE DRIVE SUSPENSION APPLICATIONS
L9511 Heavy Duty Diesel (4x2)

Application	Codes	23,000 Lbs.
Body (1) (Truck or Drom)	 AAAG00 AAAG00	All OK except: Mixer (Construction-Concrete Mixer) Mixer with Liftable Tag axle
Trailer (2) (Tractor or Truck)		All OK
Expected Terrain	ACAD00 ACAA00 ACAB00	100% On-Highway Max. 10% Off-Highway Max. 25% Off-Highway
Most Severe Road Surface	ADAA00 ADAB00 ADAD00 ADAE00 ADAC00 ADAF00 ADAG00	Excellent Highway Smooth Concrete or Asphalt (Typical Highway) Packed Clay-Bound Gravel Hard Packed Natural Soil Rough Concrete or Asphalt (Broken Concrete) Maintained Gravel (Packed Gravel) Soft Soil/Mud/Debris (Landfill) (Spongy Natural Soil)
Where Domiciled		All OK
Maximum		115,000 lbs. and less
Expected GCW Maximum Total Pusher/Tag Axle GAWR		20,000 lbs. and less

(1) Mandatory to also select Vehicle Designation Code AAACOO (Truck)
(2) Mandatory to also select Vehicle Designation Code AAABOO (Tractor) or Code AAADOO (Truck w/Trailer)

111" BBC
AIRLINER TANDEM DRIVE SUSPENSION APPLICATIONS
LT9511 Heavy Duty Diesel (6x4)

Application	Codes	40,000 lbs. EXTRA DUTY	Codes	46,000 lbs.
Body (1) (Truck or Drom)	AABH00 AAAL00 AABH00 AABJ00 AAAM00 AAA400 AAA500	Attic Van Only Car/Truck Carrier Body Only (Linehaul-Auto Transport) Dry Van Body Only Flatbed Only (Linehaul-Flat Bed) Reefer Van Body Only Tank Only (Bulk Hauler-Dry) Tank Only (Bulk Hauler-Liquid)	 AAAG00 AAAG00 AAA100	All OK except: Mixer (Construction-Concrete Mixer) Mixer with Liftable tag axle Severe Duty (Mixer)
Trailer (2) (Tractor or Truck)		All OK		All OK
Expected Terrain	ACAD00 ACAA00	100% On-Highway Max. 10% Off-Highway Domiciled USA	ACAD00 ACAA00 ACAB00	100% On-Highway Max. 10% Off-Highway Max. 25% Off-Highway
Most Severe Road Surface	ADAA00 ADAB00 ADAC00 ADAF00	Excellent Highway Smooth Concrete or Asphalt (Typical Highway) Rough Concrete or Asphalt (Broken Concrete) Maintained Gravel Domiciled USA or Canada only (Packed Gravel)	ADAA00 ADAB00 ADAD00 ADAE00 ADAC00 ADAF00 ADAG00	Excellent Highway Smooth Concrete or Asphalt (Typical Highway) Packed Clay-Bound Gravel Hard Packed Natural Soil Rough Concrete or Asphalt (Broken Concrete) Maintained Gravel (Packed Gravel) Soft Soil/Mud/Debris (Landfill) (Spongy Natural Soil)
Where Domiciled		USA 50 St. Only USA 49 St. Only Canada Only **(See Export Note)**		All OK
Maximum Expected GCW		120,000 lbs. and less domiciled in Canada 140,000 lbs. and less domiciled in USA 100,000 lbs. and less Export		180,000 lbs. and less
Maximum Total Pusher/Tag Axle GAWR		12,000 lbs. and less		24,000 lbs. and less
Bulk Commodity or High Load Factor Truck w/out Trailer		OK		OK

(1) Mandatory to also select Vehicle Designation Code AAAC00 (Truck).
(2) Mandatory to also select Vehicle Designation Code AAAB00 (Tractor) or Code AAAD00 (Truck w/Trailer).
Export Note: For export, the AirLiner 40,000 lb. EXTRA DUTY suspension is restricted to on-highway only.