

L7501 (Mid-Range Diesel)
GVWR WITH STANDARD EQUIPMENT – 31,000 LBS.
 (Consult Truck Selection Section of the Data Book to Compute GVWR with Optional Equipment)
101" BBC - 4x2
 GCWR's – See L/LT Models, Page 1

†Maximum GVWR (lbs.) for Specific Wheelbase-Frame Combinations and Warranty								
	Frame Code For On-Highway Service Only				Frame Code For On-Off Highway Service			
WB	40E700 10.76 SM 120K PSI	40AJ00 13.3 SM 50K PSI	40E900 ¹ 13.3 SM 120K PSI	40FA00 15.9 SM 120K PSI	40E700 10.76 SM 120K PSI	40AJ00 13.3 SM 50K PSI	40E900 13.3 SM 120K PSI	40FA00 15.9 SM 120K PSI
141	35,000 ³	32,000 ²	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
153 - 165	35,000	32,000 ²	35,000 ³	39,000 ⁵	30,000 ²	N.A.	35,000 ³	37,600 ⁴
177 - 261	N.A.	32,000 ²	35,000 ³	37,600 ⁴	N.A.	26,500 ²	32,000 ²	35,000 ³

† Refer to Introduction Section page 1, IMPORTANT note, for frame/vehicle application service.

Actual GAWR is determined by front/rear axle, suspension, and tire & wheel selections in addition to these frame ratings.

¹ Std. Frame ⁴ 14,600 lb. max. front axle

² 9,000 lb. max. front axle ⁵ 16,000 lb. max. front axle


³ 12,000 lb. max. front axle

Dimensions in Inches – 101 in. BBC*						Base Curb Weight (lbs.)		
WB	CA	Truck AF ¹	Tractor AF ¹	Truck OAL	Tractor OAL	Front	Rear	Total
141	72	39	37	212	210	6234	3779	10013
153	84	39	37	224	222	6156	3889	10045
165	96	63	37	260	234	6088	4059	10147
177	108	63	37	272	246	6036	4148	10184
189	120	63	37	284	258	6005	4240	10245
207	138	75	37	314	276	5951	4377	10328
213	144	75	37	320	282	5954	4429	10383
225	156	75	37	332	294	5930	4491	10421
237	168	90	37	359	306	5914	4629	10543
243	174	90	37	365	312	5907	4657	10564
249	180	102	37	383	318	5910	4731	10641
261	192	114	37	407	330	5894	4810	10704

* Dimensions are for base models w/standard equipment.

¹ Min. AF is 40" with 52" springs

Weights are approximate and include minimum required equipment, water and oil (less fuel)

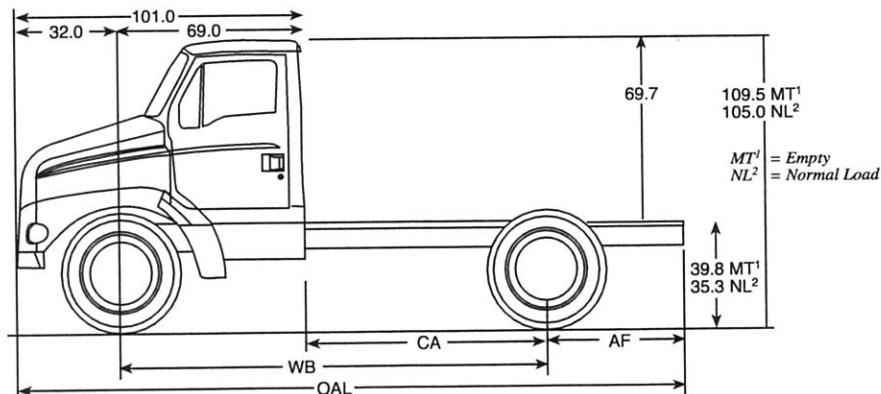

NOTE: Dimensions do not include cab clearance and identification lights.

Note: Recommend adequate tires for axle loadings. See Tires/Wheels/Wheel Equip. Section of Component Information Data Book.
All capacity ratings shown represent on-highway application.

LT7501 (Mid-Range Diesel)
GVWR WITH STANDARD EQUIPMENT – 44,000 LBS.
 (Consult Truck Selection Section of the Data Book to Compute GVWR with Optional Equipment)
101" BBC - 6x4
 GCWR's – See L/LT Models, Page 1

Maximum GVWR (lbs.) for Specific Wheelbase-Frame Combinations and Warranty							
Frame Code For On-Highway Service Only							
WB	40E700 10.76 SM 120K PSI	40AJ00 13.3 SM 50K PSI	40E900 ¹ 13.3 SM 120K PSI	40FA00 15.9 SM 120K PSI	40FB00 20.5 SM 120K PSI	40FC00 27.0 SM 120 PSI	40FD00 30.0 SM 120 PSI
153 - 165	43,000 ⁵	N.A.	52,000 ²	56,000 ⁴	N.A.	N.A.	N.A.
177 - 189	N.A.	43,000 ⁵	52,000 ²	56,000 ⁴	56,000 ⁴	64,000	66,000
207 - 225	N.A.	43,000 ⁵	46,000 ²	54,600 ³	56,000 ⁴	64,000	66,000
237 - 261	N.A.	43,000 ⁵	46,000 ²	54,600 ³	56,000 ⁴	64,000	66,000

Actual GAWR is determined by front/rear axle, suspension, and tire & wheel selections in addition to these frame ratings.

¹ Std. Frame

⁵ 9,000 lb. max. front axle

² 12,000 lb. max. front axle

³ 14,600 lb. max. front axle

⁴ 16,000 lb. max front axle

Maximum GVWR (lbs.) for Specific Wheelbase-Frame Combinations and Warranty									
Frame Code For On-Off Highway Service & Severe Duty Non-Mixer							Frame Code For Mixer Service		
WB	40FA00 15.9 SM 120K PSI	40FE00 ⁶ 20.25 SM 125K PSI	40FB00 20.5 SM 120K PSI	40GN00 26.0 SM 120K PSI	40FC00 27.0.0 SM 120K PSI	40FD00 30.0 SM 120K PSI	40GN00 26.0 SM 120K PSI	40FC00 27.0 SM 120K PSI	40FD00 30.0 SM 120K PSI
153 - 165	52,000 ²	64,000	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
177 - 189	46,000 ²	64,000	56,000 ⁴	N.A.	64,000	66,000	N.A.	56,000 ⁴	66,000
207 - 225	43,000 ⁹	64,000	54,600 ³	58,000 ⁵	64,000	66,000	54,000 ³	56,000	66,000
237	43,000 ⁹	N.A.	54,600 ³	58,000 ⁵	64,000	66,000	54,000 ³	N.A.	N.A.
243 - 261	43,000 ⁹	N.A.	54,600 ³	N.A.	64,000	66,000	N.A.	N.A.	N.A.

Actual GAWR determined by front/rear axle, suspension, and tire & wheel selections in addition to these frame ratings.

⁹ 9,000 lb. max. front axle

² 12,000 lb. max. front axle

³ 14,600 lb. max. front axle


⁴ 16,000 lb. max. front axle

⁵ 40,000 lb. max. rear axle

⁶ Avail. as extended frame only

MT¹ = Empty

NL² = Normal Load

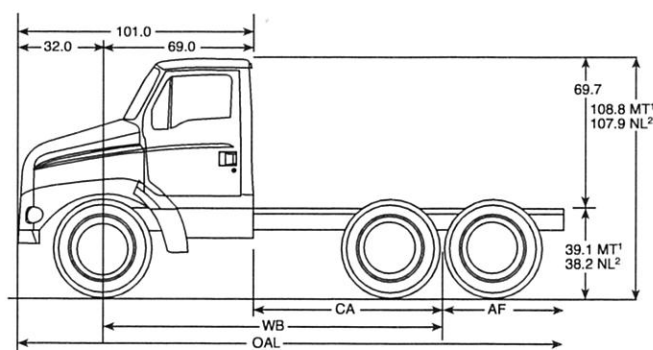

NOTE: Dimensions do not include cab clearance and identification lights.

Dimensions in Inches – 101 in. BBC*						Base Curb Weight (lbs.)		
WB	Truck		Tractor Truck		Tractor	Front	Rear	Total
	CA	AF ¹	AF ¹	OAL				
153	84	60	60	245	245	6653	5825	12478
165	96	63	60	260	257	6636	5887	12523
177	108	63	60	272	269	6665	5949	12614
189	120	63	60	284	281	6640	6016	12656
207	138	75	60	314	299	6637	6104	12741
213	144	75	60	320	305	6637	6122	12759
225	156	75	60	332	317	6650	6170	12820
237	168	90	60	359	329	6656	6300	12956
243	174	90	60	365	335	6658	6318	12976
249	180	102	60	383	341	6672	6380	13052
261	192	114	60	407	353	6674	6441	13115

* Dimensions are for base models w/ standard equipment.

¹ Min. 64" AF for all 60", 55", 59", Axle Spacing.

Weights are approximate and include minimum required equipment, water and oil (less fuel)

Note: Recommend adequate tires for axle loadings.

See Tires/Wheels/Wheel Equip. Section of Component Information Data Book.

All capacity ratings shown represent on-highway application.

L / LT7501 — 101" BBC

MID-RANGE DIESEL — STANDARD EQUIPMENT

		4x2	6x4
		L7501	LT7501
SALES CODE	10 — AXLE, FRONT		
10AG00	10,000 lb.	S	S
	11 — AXLE, REAR		
	21,000 lb. Single-Speed Meritor RS-21-145	S	
	34,000 lb. Single-Speed Meritor RT-34-144		S
	13 — AXLE EQUIPMENT		
STD.	Brake Drums, Front & Rear — Full Cast	S	S
	Bushings, Kingpin, Front Axle		
STD.	Bronze	S	S
STD.	Differential, Inter-Axle — Full Locking Driver Controlled		S
13A900	Differential, Main — Non-Locking	S	S
13AF00	Drag Link & Tie Rods — Greaseable	S	S
STD.	Hubs, Front & Rear — Ductile Iron	S	S
STD.	Magnetic Traps, Rear Axle — Drain & Fill Plugs	S	S
13BT00	Steering Power — Integral, TRW TAS-65 Gear	S	S
13H700	Wheel Seals — Front, Grease Type	S	S
STD.	Wheel Seals — Rear, Wet Type, C.R. "Scotseal", Unitized	S	S
	16 — BRAKES, SERVICE		
	Brakes, Air — Cam Type		
16AW00	Front — 15"x4" Meritor Q Plus	S	S
16A000	Rear — 16-1/2"x7" Meritor Q Plus	S	S
	19 — BRAKE EQUIPMENT		
19MF00	ABS, Antilock Brake System — Full Vehicle, Four Channel w/ Wheel-End Sensing	S	S
	Air Compressor		
19FC00	13.2 CFM, Water Cooled, Bendix Tu-Flo 550	S	S
STD.	Air Dryer-None	S	S
19NL00	Air Reservoir, Steel	S	S
STD.	Drain Cocks, Manual	S	S
	Parking Brake, Spring-Set Rear Axle — Maxi II		
19NY00	Rear, Single Axle (Two-Wheel).....	S	
19N000	Rear, Tandem Axle (Four-Wheel) (Standard w/ truck)		S
STD.	Slack Adjusters, Front & Rear — 5.5" Automatic, Gunite	S	S
	22 — CAB, STEEL		
	Value Interior Trim		
22BJ00	Medium Graphite Interior Trim Color	S	S
	23 — CAB EQUIPMENT/ EXTERIOR		
STD.	Assist Handles, R.H. & L.H.	S	S
STD.	Cab Mounts, Front — Trunnion	S	S
STD.	Cab Suspension, Rear, Conventional Rubber	S	S
	Glass		
STD.	Door Vent Windows, Solar Tinted L.H. & R.H. (Two way w/locking latch).....	S	S
STD.	Rear Window, None	S	S
STD.	Windshield & Side Glass — Solar Tinted	S	S
232H00	Grille, Hood Mounted (Painted Body Color).....	S	S
233W00	Hood, Sloped, Aerodynamic, Forward Tilting, Fiberglass	S	S
23KH00	Horn, Single — Electric	S	S
23YX00	Mirrors, Dual, Western, Painted Med. Titanium	S	S
233B00	Mirror, Auxiliary, 5.5" Dia., Bottom Mounted, Painted Med. Titanium, R.H. only	S	S
23RA00	Mirror Arms, 96"(Standard w/ truck)	S	S
STD.	Windshield Wipers, Interval, Electric (w/lift-off "Wet Arm" windshield wiper arms and integral nozzles, electric washer pump & 8-liter reservoir)	S	S

NOTE: All capacity ratings shown represent on-highway application.

L / LT7501 — 101" BBC

MID-RANGE DIESEL — STANDARD EQUIPMENT

		4x2	6x4
		L7501	LT7501
SALES CODE	24 — CAB EQUIPMENT/ INTERIOR		
24AL00	Cigar Lighter (I/P Mounted).....	S	S
STD.	Door Locks, Manual L.H. & R.H.	S	S
STD.	Floor Mat, Full Vinyl Med. Dark Graphite	S	S
STD.	Heater, Defroster/ Demister and Fresh Air Ventilation	S	S
STD.	Lamp, Dome, Center Mounted	S	S
STD.	Radio, None	S	S
STD.	Steering Column, Stationary	S	S
24B500	Steering Wheel 18" Dia.	S	S
STD.	Sun Visors, Single, Vinyl — L.H. & R.H. (Incl. ticket strap).....	S	S
STD.	Window Control — Manual (Side Windows)	S	S
	25 — SEATING		
	(Seats are color coordinated to cab trim level. Passenger seat matches driver seat in appearance and material; All seats include seat belts)		
25AACW	National, Mid-Back		
25GH00	Driver, Fixed Base, Less Isolator (Incl. cup holder).....	S	S
	Passenger, None	S	S
	OTHER SEATING EQUIPMENT		
25AAD3	Belts, Seat — Lap and Shoulder, 3-pt. mounting w/ Adjustable D-Ring		
	Driver Only	S	S
	26 — INSTRUMENTS/ GAUGES/ SWITCHES/ WARNING DEVICES		
26MR00	Air Cleaner Restriction Indicator, Air Cleaner Mounted	S	S
26NN00	Gauges, Electronic Cluster (Incl. speedometer, tachometer, fuel level, coolant temp., voltmeter, oil press. & dual air brake press.).....	S	S
26M700	Gauge — Control Panel, Flat Gauge Insert — R.H.	S	S
STD.	Parking Brake Control, I/P Mounted	S	S
26C700	Turn Signal Switch, Self-Cancelling	S	S
	Warning Lights		
STD.	ABS Anti-Lock System	S	S
STD.	High Beam Indicator	S	S
STD.	Turn Signal Indicators	S	S
STD.	Warning Light & Buzzer — Air Brakes	S	S
	27 — ELECTRICAL		
STD.	Canadian Daytime Running Lights (Standard in Canada only)	S	S
	Circuits, Customer Access		
STD.	I/P Fuse Panel Pkg.	S	S
STD.	Access Circuits Connector (Eng. compt., rear of cab & rear of chassis w/truck applications; Eng. compt. & rear of cab w/tractor applications).....	S	S
STD.	Circuit Protectors, Fuses	S	S
STD.	Flasher, Emergency	S	S
STD.	Lamps, Turn Signal & Side Marker Combination, Rear/ Side Facing, Hood Mounted	S	S
	Lights		
STD.	Cab Marker, 5 Lights	S	S
STD.	Head, Two Halogen, Dual Beam (Incl. stalk mounted switch for dimmer and flash to pass).....	S	S
STD.	Hood Mount Turn Signals, 2 Lights	S	S
STD.	Tail, Two w/ Integral Stop, Turn, Backup, and License Plate (Mounted inside frame rails).....	S	S
STD.	Taillight Mounting, Inside Frame Rails — 21.56" Spacing	S	S
	28 — ALTERNATORS		
28BK00	95 amp., 1425 watt Motorcraft, Internally Regulated	S	S
	29 — BATTERIES/ BOXES/ CABLES		
29HM00	Battery, Maintenance Free Sterling, 12 Volt		
	Two, 600 CCA (65 amp.-hr.).....	S	S
29KE00	Battery Box, Frame Mounted		
	Under Cab, Standard Weight, L.H. — Forward Mounted (Incl. frame mtd. cab access steps)	S	S
	30 — ENGINES		
	(Engine listings show Advertised Horsepower/Advertised Torque/Governed RPM; See Safety-Noise-Emission Section of Component Info. Data Book)		
300P00	CUMMINS ISC (ELECTRONIC) DIESEL		
	ISC-215 HP/ 620 lb.-ft./ 2400 RPM	S	S

L / LT7501 — 101" BBC

MID-RANGE DIESEL — STANDARD EQUIPMENT

		4x2	6x4
		L7501	LT7501
SALES CODE	32 — EXHAUSTS		
32FD00	Exhaust System Single Horizontal Muffler and Pipe, R.H.	S	S
	36 — CLUTCHES		
36FA00	Clutch, Eaton-Spicer		
STD.	14", 1-plate ceramic, Manual Adjustment	S	S
STD.	Clutch Housing, Aluminum (For on-hwy. only)	S	S
	37 — ENGINE EQUIPMENT		
STD.	Air Cleaner, Donaldson Single Stage	S	S
STD.	Air Intake, Source-Engine Outside Air	S	S
373000	Engine Mounts, Compression Type	S	S
373200	Engine Shutoff — Key (Solenoid).....	S	S
373400	Fan Clutch, Eaton Viscous	S	S
STD.	Filter, Coolant Conditioner — Fleetguard Spin-On type	S	S
STD.	Filter, Fuel/ Water Separator — Fleetguard, Engine Mtd. Unheated	S	S
STD.	Filter, Oil Single 2.6 qt. Disposable — Fleetguard LF3000 Full-Flow & By-Pass Combo, Spin-On type	S	S
STD.	Fuel Pump, Electronically Controlled	S	S
STD.	Governor, Electronic	S	S
STD.	Hose, Radiator, EPDM Rubber (Incl. torque controlled clamps)	S	S
STD.	Oil Cooler, Integral	S	S
STD.	Oil Fill System, Standard Oil Fill & Check	S	S
STD.	Radiator, Nominal Cooling — 830 sq. in. cooling module w/ 2.0" alum. core	S	S
STD.	Starter, Electric, Delco 12 Volt	S	S
STD.	Starter Interlock (Clutch Pedal Actuated).....	S	S
	40 — FRAME — SINGLE REAR AXLES		
40E900	Single Channel 13.3 SM, 120,000 PSI	S	
	40 — FRAME — TANDEM REAR AXLES		
40E900	Single Channel 13.3 SM, 120,000 PSI		S
	FRAME MODIFICATIONS		
40EL00	Bolted Frame w/ Huck Fasteners at rear cab support, intermediate and rear suspension crossmembers	S	S
40EN00	Frame End, Rear, Square Cut	S	S
	43 — FUEL TANKS		
43L700	Rectangular Tanks, Steel — Shallow 55 gal. Single R.H.	S	S
	44 — FUEL TANK EQUIPMENT		
STD.	Forward Mounted Fuel Tanks, R.H.	S	S
STD.	Fuel Tank Mounting Supports Standard-Weight Tank Supports	S	S
STD.	Steps Cab Length, Fuel Tank Mounted	S	S
	46 — SUSPENSION, FRONT, MULTI-LEAF, 54" SPREAD		
46CT00	10,000 lb. Cap.	S	S

NOTE: All capacity ratings shown represent on-highway application.

L / LT7501 — 101" BBC

MID-RANGE DIESEL — STANDARD EQUIPMENT

		4x2	6x4
		L7501	LT7501
SALES CODE	47 — SUSPENSION, REAR		
47J700	SUSPENSION, REAR, MULTI-LEAF 21,000 lb. Capacity for 21,000 lb. rear axle	S	
47KH00	SUSPENSION, REAR — AUXILIARY Single Leaf	S	
47AW00	SUSPENSION, REAR, TANDEM — FOR 34,000 LB. AXLES 34,000 lb. Cap. Hendrickson Steel Walking Beam — 52" Axle Spacing U2-340		S
50/ 51/ 52/ 53/ 54 — TIRES-WHEELS AVAILABILITY			
50ADX0	Tires, Front Two, 255/ 80R 22.5G (14PR) Michelin XZE	S	S
51ADX0	Tires, Rear Four, 255/ 80R 22.5G (14PR) Michelin XZE	S	
51ADX0	Eight, 255/ 80R 22.5G (14PR) Michelin XZE		S
52G000	Wheels, Front Two, 22.5 X 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	S	S
53G000	Wheels, Rear Four, 22.5 X 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	S	
53G000	Eight, 22.5 X 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW		S
55 — WHEEL & TIRE EQUIPMENT			
STD.	Wheels, I.S.O. Steel Disc (Painted "White" — Not Pure White or Diamond White).....	S	S
56 — TRANSMISSIONS			
56SE00	5-Speed Direct Eaton FS-6305A	S	S
59 — CHASSIS EQUIPMENT			
59HS00	Bumper, Front Steel, Full Width, Flat, Painted Med. Titanium	S	S

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

101" BBC BASE VEHICLE PRICE ORDER CODES AND ADDITIONAL CHARGES FOR VARIOUS WHEELBASES

4x2

Order Code	Wheelbase	Suggested List Price (U.S. Dollars)
W14100-AK	141"	NC
W15300-AR	153"	STD.
W16500-AA	165"	321.00
W17700-AK	177"	321.00
W18900-AP	189"	321.00
W20700-AP	207"	524.00
W21300-AA	213"	524.00
W22500-AP	225"	524.00
W23700-AN	237"	524.00
W24300-AA	243"	821.00
W24900-AA	249"	821.00
W26100-AA	261"	821.00

6x4

Order Code	Wheelbase	Suggested List Price (U.S. Dollars)
W15300-AV	153" (Req. optional exhaust)	NC
W16500-AC	165"	STD.
W17700-AM	177"	331.00
W18900-AT	189"	331.00
W20700-AT	207"	437.00
W21300-AC	213"	437.00
W22500-AT	225"	437.00
W23700-AR	237"	437.00
W24300-AC	243"	736.00
W24900-AC	249"	736.00
W26100-AD	261"	736.00

**INTENTIONALLY
BLANK
THIS MAILING**

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
CONFIGURATION SALES CODE				L7501	LT7501
STANDARD WHEELBASE				153"	165"
CONFIGURATION PRICE (U.S. Dollars)				47987.00	56432.00
REFER TO ORDERING INFORMATION — RPO OR TFT FOR MANDATORY VEHICLE APPLICATION CODES AND THEIR DEFINITIONS.					
SALES CODE	10 — AXLE, FRONT				
10AB00-AW	7,000 lb. (Incl. 7,000 lb. cap. 54" spread, multi-leaf susp., Code 46CN00, 15" x 4" Meritor Q Plus brakes & TAS-65 power steering) (Requires front shock absorbers, Code 13AB00, when 14,000 lb., 15,000lb. or 17,500 lb. rear suspension is ordered) (Avail. w/truck only) (N.A. w/Cat. 3126 eng.)	-96	CR 317.00	0	0
10AC00-BM	9,000 lb. (Incl. 9,000 lb. cap. 54" spread, multi-leaf susp., Code 46CR00, 15" x 4" Meritor Q Plus brakes & TAS-65 power steering) (Requires front shock absorbers, Code 13AB00, when 15,000 lb. rear suspension is ordered) (N.A. w/Cat. 3126 eng.)	-31	67.00	0	0
10AG00	10,000 lb. (Incl. 10,000 lb. cap. 54" spread, multi-leaf susp., Code 46CT00, 15" x 4" Meritor Q Plus brakes & TAS-65 power steering) (Standard)	—	—	S	S
10AE00-BN	12,000 lb. (Incl. 12,000 lb. cap. 54" spread, multi-leaf susp., Code 46CV00, 15" x 4" Meritor Q Plus brakes & TAS-65 power steering)	29	301.00	0	0
10AM00-AC	13,000 lb. (Incl. 13,200 lb. cap. 54" spread, multi-leaf susp., Code 46CW00, 15" x 4" Meritor Q Plus brakes & TAS-65 power steering) (N.A. w/Cum. ISB eng.)	44	668.00	0	0
10A200-AH	14,600 lb. (Incl. 14,600 lb. cap. 54" spread, multi-leaf susp., Code 46CX00 & 16-1/2" x 6" Meritor Q Plus brakes Code 16A200) (Incl. TAS-85 power steering w/54" multi-leaf or taper-leaf springs) (N.A. w/Cum. ISB eng.)	296	1803.00	0	0
10AF00-AR	16,000 lb. (Incl. 16,000 lb. cap. 54" spread, multi-leaf susp., Code 46CY00, 16-1/2" x 6" Meritor Q Plus brakes Code 16A200 & TAS-85 power steering) (N.A. w/Cum. ISB eng.) (Avail. w/truck or on-off hwy. tractor only)	332	2115.00	0	0
10AD00-AJ	18,000 lb. (Incl. 18,000 lb. cap. 54" spread, multi-leaf susp., Code 46C000, 16-1/2" x 6" Meritor Q Plus brakes Code 16A200 and TAS-65 L.H. & RCS-55 R.H. dual power steering) (Avail. w/truck or on-off hwy. tractor only)	403	3199.00		0
10AH00-AC	20,000 lb. (Incl. 20,000 lb. cap. 54" spread, multi-leaf susp., Code 46C100, 16-1/2" x 6" Meritor Q Plus brakes Code 16A200 and TAS-65 L.H. & RCS-55 R.H. dual power steering) (Avail. w/truck or on-off hwy. tractor only)	369	3883.00		0
11 — AXLE, REAR					
	17,500 lb. Single-Speed Meritor RS-17-144	-35	CR 565.00	0	
	2.79 11AH20-AA 4.63 11AJC0-AA (1) 2.93 11AH30-AA 4.88 11AJD0-AA (1) 3.07 11AH40-AA 5.13 11AJE0-AA (1) 3.21 11AH50-AA 5.29 11AJF0-AA (1) 3.42 11AH60-AA 5.57 11AJG0-AA (1) 3.58 11AH70-AA 5.86 11AJH0-AA (1) (2) 3.73 11AH80-AA 6.14 11AJJ0-AA (1) (2) 3.90 11AH90-AA 6.43 11AJK0-AA (1) (2) 4.11 11AJA0-AA 6.83 11AJL0-AA (1) (2) 4.33 11AJB0-AA (1) 7.17 11AJM0-AA (1) (2)				
	17,500 lb. Two-Speed (Not available with 19.5" wheels & tires) Meritor RS-17-224	-63	105.00	0	
	3.91/5.45 11AN40-AA 5.86/ 8.17 11APA0-AA 4.10/5.72 11AN50-AA 6.14/ 8.57 11APB0-AA 4.30/6.00 11AN60-AA 6.50/ 9.07 11APC0-AA 4.56/6.36 11AN70-AA 6.83/ 9.53 11APD0-AA 4.88/6.80 11AN80-AA 7.17/ 10.0 11APE0-AA 5.38/7.50 11AN90-AA				

(1) Not available with 19.5" wheels in combination with non-overdrive transmission.

(2) Not available with 19.5" wheels in combination with overdrive transmission.

NOTE: All capacity ratings shown represent on-highway application.

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION				WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	11 — AXLE, REAR (Continued)						
	19,000 lb. Single-Speed (Not available with 19.5" wheels & tires) Meritor RS-19-144			-35	CR 231.00	0	
	2.79	11AJN0-AA	4.63 11AJ20-AA				
	2.93	11AJP0-AA	4.88 11AJ30-AA				
	3.07	11AJQ0-AA	5.13 11AJ40-AA				
	3.21	11AJR0-AA	5.29 11AJ50-AA				
	3.42	11ajs0-AA	5.57 11AJ60-AA				
	3.58	11AJT0-AA	5.86 11AJ70-AA				
	3.73	11AJU0-AA	6.14 11AJ80-AA				
	3.90	11AJV0-AA	6.43 11AJ90-AA				
	4.11	11AJW0-AA	6.83 11AKA0-AA				
	4.33	11AJY0-AA	7.17 11AKB0-AA				
	19,000 lb. Two-Speed (Not available with 19.5" wheels & tires) Meritor RS-19-224			NO CODE	MATCH FOUND	0	
	3.91/ 5.45	11APF0-AA	5.86/ 8.17 11APM0-AA				
	4.10/ 5.72	11APG0-AA	6.14/ 8.57 11APN0-AA				
	4.30/ 6.00	11APH0-AA	6.50/ 9.07 11APP0-AA				
	4.56/ 6.36	11APJ0-AA	6.83/ 9.53 11APQ0-AA				
	4.88/ 6.80	11APK0-AA	7.17/ 10.0 11APR0-AA				
	5.38/ 7.50	11APL0-AA					
	21,000 lb. Single-Speed (Not available with 19.5" wheels & tires) Meritor RS-21-145 (Standard)			—	—	S	
	2.79	11AHA0-AA	4.63 119G00-AT				
	2.93	11ABN0-AA	4.88 11BP00-AV				
	3.07	115D00-AA	5.13 11HW00-AH				
	3.21	11AAB8-AA	5.29 11BT00-AV				
	3.42	113G00-AG	5.57 11HX00-AP				
	3.58	11WP00-AG	5.86 11BV00-AP				
	3.73	11HV00-AL	6.14 112600-AJ				
	3.90	11AHB0-AA	6.43 11BW00-AY				
	4.11	11AHC0-AA	6.83 11BX00-AR				
	4.33	119F00-AP	7.17 11BY00-AN				
	21,000 lb. Two-Speed (Not available with 19.5" wheels & tires) Meritor RS-21-230			74	677.00	0	
	3.91/ 5.45	11B000-AM	5.38/ 7.50 11B500-AV				
	4.10/ 5.72	11B100-AN	5.86/ 8.17 11B900-AF				
	4.30/ 6.00	11B200-AT	6.50/ 9.07 11B600-AE				
	4.56/ 6.36	11B300-AV	6.83/ 9.53 11B700-AE				
	4.88/ 6.80	11B400-AV	7.17/ 10.0 11B800-AE				
	23,000 lb. Single-Speed (Not available with 19.5" wheels & tires) Meritor RS-23-160			164	684.00	0	
	2.80	11ABG0-AA	4.30 11CF00-AX				
	2.93	11AAF7-AA	4.56 11CG00-BK				
	3.07	11V500-AL	4.89 11CH00-AY				
	3.21	11V600-AL	5.38 11CJ00-AP				
	3.42	11CA00-AN	5.63 11CK00-AP				
	3.58	11CB00-AN	6.14 11CL00-AK				
	3.73	11CC00-AW	6.43 117J00-AC				
	3.91	11CD00-AX	6.83 11CM00-AL				
	4.10	11CE00-AX	7.17 11CN00-A6				
	23,000 lb. Single-Speed (Not available with 19.5" wheels & tires) Meritor RS-23-161 (Req. Neway AD-123 air susp. Code 47KG00)			188	725.00	0	
	2.80	11ACC0-AA	4.30 114900-AA				
	2.93	11ACD0-AA	4.56 11AAF3-AA				
	3.07	11ACE0-AA	4.89 11ACL0-AA				
	3.21	11ACF0-AA	5.38 11ACM0-AA				
	3.42	11ACG0-AA	5.63 11ACN0-AA				
	3.58	114300-AA	6.14 11ACP0-AA				
	3.73	11ACH0-AA	6.43 11ACQ0-AA				
	3.91	11ACJ0-AA	6.83 11AAFB-AA				
	4.10	11ACK0-AA	7.17 11ACR0-AA				

NOTE: All capacity ratings shown represent on-highway application.

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION				WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	11 — AXLE, REAR (Continued)						
	23,000 lb. Single-Speed (Not available with 19.5" wheels & tires)						
	Meritor RS-23-186			220	1311.00	0	
	2.93	11ALF0-AA	4.56 11ALP0-AA				
	3.08	11ALG0-AA	4.89 11ALQ0-AA				
	3.21	11AFR0-AA	5.13 11ALR0-AA				
	3.42	11ALH0-AA	5.38 11ALS0-AA				
	3.58	11ALJ0-AA	5.63 11ALT0-AA				
	3.73	11ALK0-AA	5.86 11ALU0-AA				
	3.91	11ALL0-AA	6.14 11ALV0-AA				
	4.10	11ALM0-AA	6.83 11ALW0-AA				
	4.30	11ALN0-AA	7.17 11ALX0-AA				
	23,000 lb. Two-Speed (Not available with 19.5" wheels & tires)			148	1395.00	0	
	Meritor RS-23-240						
	4.10/ 5.59	11DE00-AL	5.57/ 7.60 11DJ00-AN				
	4.30/ 5.86	11DF00-AL	6.14/ 8.38 11DK00-AD				
	4.56/ 6.21	117L00-AM	6.50/ 8.86 11DL00-AD				
	4.88/ 6.65	11DG00-AL	7.17/ 9.77 11DM00-AD				
	5.38/ 7.33	11DH00-AN					
	34,000 lb. Single-Speed (Not available with 19.5" wheels & tires)			—	—		S
	Meritor RT-34-144 (Standard)						
	2.79	11AKC0-AA	4.33 11AKN0-AA				
	2.93	11AKD0-AA	4.63 11AKQ0-AA				
	3.07	11AKE0-AA	4.88 11AKR0-AA				
	3.21	11AKF0-AA	5.29 11AKS0-AA				
	3.42	11AKG0-AA	5.86 11AKT0-AA				
	3.58	11AKH0-AA	6.14 11AKU0-AA				
	3.73	11AKJ0-AA	6.43 11AKV0-AA				
	3.90	11AKK0-AA	6.83 11AKW0-AA				
	4.11	11AKL0-AA	7.17 11AKX0-AA				
	40,000 lb. Single-Speed (Not available with 19.5" wheels & tires)			1	543.00		0
	Meritor RT-40-145						
	2.79	11AHG0-AA	4.33 118100-AP				
	2.93	119800-AA	4.63 118200-AP				
	3.07	11G400-AM	4.88 11FG00-AT				
	3.21	11G500-AM	5.29 11FH00-AG				
	3.42	11E900-AN	5.86 11FJ00-AG				
	3.58	11FA00-AN	6.14 11FK00-AA				
	3.73	11FB00-BH	6.43 11FL00-AA				
	3.90	11AHH0-AA	6.83 11G700-AA				
	4.11	11AHJ0-AA	7.17 11FM00-AA				
	40,000 lb. Single-Speed (Not available with 19.5" wheels & tires)			31	887.00		0
	Meritor RT-40-145P						
	2.79	11AHK0-AA	4.33 118300-AP				
	2.93	119M00-AA	4.63 118400-AP				
	3.07	11MX00-AL	4.88 11FY00-AR				
	3.21	11P700-AL	5.29 11F000-AG				
	3.42	11FN00-AM	5.86 11F100-AG				
	3.58	11FP00-AM	6.14 11F200-AA				
	3.73	11FR00-AR	6.43 11F300-AA				
	3.90	11AHL0-AA	6.83 11WK00-AA				
	4.11	11AHM0-AA	7.17 11F400-AA				
	46,000 lb. Single-Speed (Incl. 46,000 lb. RT2-460 susp., w/Bronze center bushings & 54" axle spacing Code 47BC00) (N.A. w/10.76 SM frame Code 40E7000 or 13.3 SM frame Code 40E900) (Not available with 19.5" wheels & tires)			830	4311.00		0
	Meritor RT-46-160						
	3.07	11YF00-AJ	4.56 11GG00-AL				
	3.21	11YG00-AJ	4.89 11GH00-AL				
	3.42	11GA00-AL	5.38 11GJ00-AD				
	3.58	11GB00-AL	5.63 11GK00-AD				
	3.73	11GC00-AL	6.14 11KJ00-AA				
	3.91	11GD00-AL	6.43 11PC00-AA				
	4.10	11GE00-AL	6.83 11PG00-AA				
	4.30	11GF00-AL	7.17 11PH00-AA				

NOTE: All capacity ratings shown represent on-highway application.

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	11 — AXLE, REAR (Continued)				
	46,000 lb. Single-Speed (Incl. 46,000 lb. RT2-460 susp., w/Bronze center bushings & 54" axle spacing Code 47BC00) (N.A. w/10.76 SM frame Code 40E700 or 13.3 SM frame Code 40E900) (Not available with 19.5" wheels & tires) Meritor RT-46-160P (Req. driver controlled main Rear Axle locking differential Code 13AW00)	860	4603.00		0
	3.07 11YH00-AJ 4.56 11GX00-AL 3.21 11YJ00-AJ 4.89 11GY00-AL 3.42 11GL00-AL 5.38 11G000-AD 3.58 11GN00-AL 5.63 11G100-AD 3.73 11GR00-AL 6.14 11N000-AA 3.91 11GT00-AL 6.43 11AADT-AA 4.10 11GV00-AL 6.83 11TA00-AA 4.30 11GW00-AL 7.17 11XA00-AA				
	13 — AXLE EQUIPMENT				
STD.	Brake Drums, Front & Rear — Full Cast (Standard)	—	—	S	S
	Brake Drums, Centrifuse (N.A. w/cast spoke wheels)				
13AP00-BD	— Front (Avail. w/10,000 lb. Front Axle Code 10AG00 or 12,000 lb. Front Axle Code 10AE00; Avail. w/on-hwy. tractor only)	-24	345.00	0	0
13AR00-BH	— Rear, Single Axle (Avail. w/21- or 23,000 lb. Rear Axle only; N.A. w/severe duty)	-36	345.00	0	
13AR00-BJ	— Rear, Tandem Axle (Avail. w/40- or 46,000 lb. Rear Axle only; N.A. w/severe duty)	-72	688.00		0
	Bushings, Kingpin, Front Axle				
STD.	— Bronze (Standard)	—	—	S	S
13A300-BJ	— Garlock Low Friction (Avail. w/10,000 lb. Front Axle Code 10AG00, 12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00 only)	0	403.00	0	0
STD.	Differential, Inter-Axle — Full Locking, Driver Controlled (Standard)	—	—		S
13A900	Differential, Main — Non-Locking (Standard)	—	—	S	S
	Differential, Main, Lockout — Full Locking, Driver Controlled				
13AW00-BH	— Rear, Single Axle (N.A. w/RS-17-144, RS-17-224, RS-19-144, RS-19-224, RS-21-230 & RS-23-240)	15	427.00	0	
13AW00-BJ	— Rear, Tandem Axle (Both rear axles) (N.A. w/RT-34-144) (N.A. when air susp. dump valve Code 48AC00 and inside/outside air Code 373T00 is used in comb. w/air slide fifth wheel)	15	852.00		0
13AF00	Drag Link & Tie Rod — Greaseable (Standard)	—	—	S	S
	Driveline — Half Round Yoke (See Component Book, U-Joint Chart in Axle Equipment & Driveline Section for size and availability)				
STD.	— Standard U-Joints (Standard)	—	—	S	S
13AG00-BN	— Heavy Duty U-Joints	26	71.00	0	
13AG00-BV	— Heavy Duty U-Joints	14	100.00		0
	Hubs, Aluminum				
13AT00-AV	— Front (Avail. w/10,000 lb. Front Axle Code 10AG00 or 12,000 lb. Front Axle Code 10AE00; For on-hwy. service only) (Req. Garlock bushings Code 13A300 when used w/std. ABS brakes)	-17	327.00	0	0
	— Rear (N.A. for severe duty)				
13AV00-B9	— Single Axle (Avail. w/21- or 23,000 lb. Rear Axle)	-40	335.00	0	
13AV00-CA	— Tandem Axle (Avail. w/40- or 46,000 lb. Rear Axle)	-80	727.00		0
STD.	Hubs, Front & Rear — Ductile Iron (Standard)	—	—	S	S
	Hubs, High Tensile Ferrous (For on-hwy. service only)				
13HW00-AA	— Front (Avail. w/10,000 lb. Front Axle Code 10AG00 or 12,000 lb. Front Axle Code 10AE00)	-17	287.00	0	0
	— Rear				
13HX00-AA	— Single Axle (Avail. w/21- or 23,000 lb. Rear Axle only)	-30	287.00	0	
13HX00-AB	— Tandem Axle (Avail. w/40,000 lb. Rear Axle only)	-60	573.00		0
STD.	Magnetic Traps, Rear Axle — Drain & Fill Plugs (Standard)	—	—	S	S

NOTE: All capacity ratings shown represent on-highway application.

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	13 — AXLE EQUIPMENT (Continued)				
13AB00-BN	Shock Abs.	25	139.00	0	0
13BT00	Steering, I	—	—	S	S
	Synthetic				
13F300-AA	Single I	0	145.00	0	
13F300-AJ	17,5	0	145.00	0	
	23,0				
13F300-AB	Tanden	0	232.00		0
13F300-AN	34,0	0	308.00		0
13F200-AA	46,0	0	32.00	0	0
	Wheel				
13H700	Wheel Se	—	—	S	S
13H600-AB	Grease	2	35.00	0	0
	Wet T.				
STD.	Wheel Se	—	—	S	S
	Wet T				
13A000-BT	Wet T	1	28.00	0	
13A000-BV	—	3	53.00		0
	—				
	16 — E				
16AW00	Brakes, Air — Cam Type				
16A100-BB	— Front — 15" x 4" Meritor Q Plus (Standard)	—	—	S	S
	— Front — 16-1/2" x 5" Meritor Q Plus (Avail. w/12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00 only; N.A. w/alum. hubs, high tensile hubs or centrifuse brake drums)	30	149.00	0	0
16A000	— Rear — 16-1/2" x 7" Meritor Q Plus (Standard)	—	—	S	S
16CU00-AA	— Rear — 15" x 8.625" Meritor Q Plus (Included when 19.5" wheels are specified)	NO CODE	MATCH FOUND	0	
	19 — BRAKE EQUIPMENT				
19MF00	ABS, Antilock Brake System — Full Vehicle, Four Channel				
	— Incl. wheel-end sensing (Standard)	—	—	S	S
19FC00	Air Compressor				
	13.2 CFM, Water Cooled, Bendix Tu-Flo 550 (Standard)	—	—	S	S
STD.	Air Dryer, None (Standard)	—	—	S	S
19A700-BN	Air Dryer, Heated — Bendix AD-9 (Mounted on L.H. frame rail, aft of front wheelwell)	27	433.00	0	0
19NF00-AA	Air Dryer, Heated — Bendix, AD-IP (System Guard, Integral Purge) (Mounted on L.H. frame rail, aft of front wheelwell)	34	433.00	0	0
	Air Reservoir Tanks				
19NG00-AA	Single Axle				
	Lightweight, Aluminum (Painted Black)	-35	435.00	0	
19NL00	Steel (Standard)	—	—	S	
	Tandem Axle				
19NG00-AJ	Lightweight, Aluminum (Painted Black)	-35	435.00		0
19NL00	Steel (Standard)	—	—		S
19QA00-AA	Brake Control Valve, Rear Brakes Hand Operated (For truck use only) (N.A. w/two-pass. seat Code 25AADF)	2	147.00	0	0
19BV00-AA	Brake Control Valve, Trailer, Hand Operated — DELETE (For trailer towing pkg. Code 19NH00 or tractor pkg. only)	-2	CR 17.00	0	0

19N/K00 IS TO
BE REMOVED FROM
DATA BOOK
BUT RPO OPTIONS
ARE TO BE LEFT
OPEN FOR DSO INQUIRY
PURPOSES

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	19 — BRAKE EQUIPMENT (Continued)				
	Brake Dust Shields (Not available with 19.5" wheels)				
	Single Axle				
19JE00-BA	— Use w/ on-hwy. applications	12	32.00	0	
19JE00-BK	— Required w/ on-off hwy. or severe duty applications	12	NC	0	
	Tandem Axle				
19JE00-BB	— Use w/ on-hwy. applications	19	64.00		0
19JE00-BL	— Required w/ on-off hwy. or severe duty applications	19	NC		0
STD.	Drain Cocks, Manual (Standard)	—	—	S	S
19NM00-AA	Drain Cocks, Manual w/ Lanyard Cable (In lieu of std. manual drain cocks.)	1	28.00	0	0
19AV00-AD	Moisture Ejectors, Automatic, Heated — Bendix, DV-2 (In lieu of manual drain cocks)	1	99.00	0	0
19AL00-BP	Moisture Ejectors, Automatic, Non-Heated — Bendix, DV-2 (In lieu of manual drain cocks)	1	60.00	0	0
	Parking Brake, Spring-Set Rear Axle — Maxi II				
19NY00	— Rear, Single Axle — Two-Wheel (Standard)	—	—	S	
19N000	— Rear, Tandem Axle — Four-Wheel (Standard w/ truck)	—	—		S
19N000-AA	— Rear, Tandem Axle — Four-Wheel (Avail. w/tractor only)	0	NC		0
	Parking Brake, Spring-Set Rear Axle — MGM (In lieu of Maxi II)				
19N100-AA	— Rear, Single Axle — Two-Wheel	-20	NC	0	
19N100-AF	— Rear, Tandem Axle — Two-Wheel (Avail. w/tractor only)	-20	NC		0
19N200-AA	— Rear, Tandem Axle — Four-Wheel (Avail. w/truck only)	-40	NC		0
19N200-AF	— Rear, Tandem Axle — Four-Wheel (Avail. w/tractor only)	-40	NC		0
STD.	Slack Adjusters, Front & Rear — 5.5" Automatic, Gunite (Standard)	—	—	S	S
19NH00-AA	Trailer Towing Pkg. — Truck w/ Trailer (Air & elec. lines to end of frame) (Incl. tractor protection control valve & hand-operated trailer brake control valve) (Req. min. 172" wb) (Avail. w/outside frame rail taillight mounting Code 275600 and truck w/trailer Code AAAD00 only) (N.A. w/any tractor pkg.) (N.A. w/std. turn signal switch Code 26C700)	13	539.00	0	0
	20 — TRACTOR EQUIPMENT (See Component Information Data Book for complete content)				
	TRACTOR PACKAGE (Incl. tractor protection control valve, hand-operated trailer brake control valve, rear bobtail proportioning valve [in lieu of std. R-12 relay valve], tapered frame ends exc. w/reinforced frames, Signal-Stat non-cancelling turn signal switch, fixed focus trailer hook-up light incl. I/P switch w/"On" indicator, 102" mirror arms Code 23BP00, solar tint rear cab window Code 23YL00 & mud flap brackets)				
	SINGLE AXLE (Incl. 21,000 lb. multi-leaf rear susp. Code 47J700) (Deletes std. aux. susp. Code 47KH00)				
	— ON-HIGHWAY (Requires focal engine mounts Code 373100 w/Cum. ISB eng. w/9,000 lb. Front Axle Code 10AC00, 10,000 lb. Front Axle Code 10AG00, 12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00) (Req. std. compression engine mounts Code 373000 w/Cat. 3126 or Cum. ISB eng.)				
20AB00-B6	— w/ 10' Air & Electrical Tractor/ Trailer Lines (N.A. w/unipac Code 20GE00)	-26	644.00	0	
20AC00-BW	— w/ 12' Air & Electrical Tractor/ Trailer Lines (N.A. w/unipac Code 20GE00)	-26	656.00	0	
20AE00-CC	— w/ 12' Coiled Air & Electrical Tractor/ Trailer Lines (N.A. w/unipac Code 20GE00)	-25	668.00	0	
20GE00-A2	— Unipac Tractor Package (Incl. w/12' coiled air & electric lines; Also incl. single fixed focus trailer hook-up light in lieu of the hook-up light included w/tractor pkg.)	-24	723.00	0	
	— ON-OFF HIGHWAY (Incl. std. compression engine mounts Code 373000)				
20AB00-B7	— w/ 10' Air & Electrical Tractor/ Trailer Lines (N.A. w/unipac Code 20GE00)	-26	644.00	0	
20AC00-BX	— w/ 12' Air & Electrical Tractor/ Trailer Lines (N.A. w/unipac Code 20GE00)	-26	656.00	0	
20AE00-CD	— w/ 12' Coiled Air & Electrical Tractor/ Trailer Lines (N.A. w/unipac Code 20GE00)	-25	668.00	0	
20GE00-A3	— Unipac Tractor Package (Incl. w/12' coiled air & electric lines; Also incl. single fixed focus trailer hook-up light in lieu of the hook-up light included w/tractor pkg.)	-24	723.00	0	

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	20 — TRACTOR EQUIPMENT (See Component Information Data Book for complete content) (Continued)				
	TRACTOR PACKAGE (Incl. tractor protection control valve, hand-operated trailer brake control valve, rear bobtail proportioning valve [in lieu of std. R-12 relay valve], tapered frame ends exc. w/reinforced frames, Signal-Stat non-cancelling turn signal switch, fixed focus trailer hook-up light incl. I/P switch w/"On" indicator, 102" mirror arms Code 23BP00, solar tint rear cab window Code 23YL00 & mud flap brackets) (Continued)				
	TANDEM AXLE (N.A. w/front bumper extension & 261" wb) (N.A. w/extended frame Code 40GB00 & 249" or 261" wb)				
20AB00-B8	— ON-HIGHWAY (Requires focal eng. mounts Code 373100 w/Cum. ISC eng. w/9,000 lb. Front Axle Code 10AC00, 10,000 lb. Front Axle Code 10AG00, 12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00) (Req. std. compression engine mounts Code 373000 w/Cat. 3126 eng.) (Incl. two-wheel parking brakes Maxi II)	N/A	889.00		0
20AC00-BY	— w/10' Air & Electrical Tractor/Trailer Lines (N.A. w/unipac Code 20GE00)	35	903.00		0
20AE00-CE	— w/12' Air & Electrical Tractor/Trailer Lines (N.A. w/unipac Code 20GE00)	36	915.00		0
20GE00-A4	— Unipac Tractor Package (Incl. w/12' coiled air & electric lines; Also incl. single fixed focus trailer hook-up light in lieu of the hook-up light included w/tractor pkg.)	37	969.00		0
	— ON-OFF HIGHWAY (Incl. std. compression eng. mounts Code 373000 & two-wheel parking brake Maxi II)				
20AB00-B9	— w/10' Air & Electrical Tractor/Trailer Lines (N.A. w/unipac Code 20GE00)	35	716.00		0
20AC00-B0	— w/12' Air & Electrical Tractor/Trailer Lines (N.A. w/unipac Code 20GE00)	35	728.00		0
20AE00-CF	— w/12' Coiled Air & Electrical Tractor/Trailer Lines (N.A. w/unipac Code 20GE00)	36	740.00		0
20GE00-A5	— Unipac Tractor Package (Incl. w/12' coiled air & electric lines; Also incl. single fixed focus trailer hook-up light in lieu of the hook-up light included w/tractor pkg.)	37	795.00		0
	22 — CAB				
	CAB, STEEL (See Component Information Data Book for complete details)				
22BJ00	— Value Interior Trim (Incl. vinyl seat trim Code 25AAD8, hardboard headliner & lower back panel, L.H. cowl side panel w/integral footrest, black vinyl floor mat, steering column shroud, 18" steering wheel, padded vinyl sun visors w/ticket strap, scuff plates, L.H./R.H. metal assist handles, coat hook, center mounted dome lamp and L.H./R.H. door courtesy lamps & storage pockets)	—	—	S	S
	— Medium Graphite Interior Trim Color (Standard)				
22BW00-AA	— Custom Interior Trim (Incl. knit vinyl seat trim Code 25AAD7, hardboard headliner & lower back panel, back panel storage net, L.H. cowl side panel w/integral footrest, black vinyl floor mat, vinyl trimmed doors w/map pockets, L.H./R.H. padded armrests, steering column shroud, 18" steering wheel, padded vinyl sun visors w/ticket strap, scuff plates, L.H./R.H. molded assist handles, two coat hooks, center mounted dome lamp and L.H./R.H. door courtesy lamps & storage pockets)	7	252.00	0	0
	— Medium Graphite Interior Trim Color				
22B000-AA	— Prestige Interior Trim (Incl. polyknit vinyl (cloth) seat trim Code 25AAD9, cloth trimmed full headliner & carpet trimmed back panel w/storage net, L.H./R.H. cowl side panels w/integral footrest, black vinyl floor mat, vinyl trimmed "B" pillars, Polyknit trimmed doors w/map pockets, "A" pillar garnish molding, L.H./R.H. padded armrests, steering column shroud, 18" steering wheel, padded vinyl sun visors w/storage pouch, scuff plates, L.H./R.H. molded assist handles, two coat hooks, center mounted dome lamp and L.H./R.H. door courtesy lamps & storage pockets)	10	420.00	0	0
22B100-AA	— Medium Graphite Interior Trim Color	10	420.00	0	0
22B200-AA	— Medium Mocha Interior Trim Color	10	420.00	0	0
	— Cordovan Interior Trim Color	10	420.00	0	0

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	23 — CAB EQUIPMENT/ EXTERIOR				
23YG00-AA	Aerodynamic Equipment Full Pkg. (Incl. roof fairing Code 23YF00 & side extenders Code 231F00) (Avail. w/on-hwy. tractor only) (Incl. integral marker lights in lieu of std. cab mounted & cab side extender pkg. Code 231F00) (Exhaust heat shields are deleted) (Req. Special Paint Option 40 & 42)	293	1361.00	0	0
23YF00-AA	Roof Fairing Pkg (On-hwy. only) (Incl. integral lights in lieu of std. cab mounted) (Req. Special Paint Option 40) (N.A. w/side extender pkg. Code 231F00 or prep. pkg. Code 23E100).....	109	683.00	0	0
23E100-A3	Prep Pkg. — Reinforcements Only (For local installation of roof fairing & side extenders) (On-hwy. only)	1	281.00	0	0
231F00-AC	Side Extenders Pkg. (Avail. w/on-hwy. tractor only) (Req. Special Paint Option 42) (N.A. w/roof fairing pkg. Code 23YF00 or prep. pkg. Code 23E100) (Exhaust heat shields are deleted)	68	431.00	0	0
	Back-of-Cab Access Pkg. (Avail. for tractor applications only; Incl. steps and grab handles) (N.A. w/ 153" thru 165" wb w/60" tandem susp. in comb. w/all forward mtd. fuel tanks) (N.A. w/153" thru 177" wb w/Airliner tandem susp. in comb. w/all forward mtd. fuel tanks) (N.A. w/153" wb w/tandem axle in comb. w/rear mtd. L.H. single or dual 75 gal. or w/mixed 75/100 gal. rect. fuel tanks) (N.A. w/153" and 165" wb w/Airliner tandem susp. in comb. w/rear mtd. L.H. single or dual 75 gal. or w/mixed 75/100 gallon fuel tanks) (Refer to Quarter Fenders Restriction charts in the Appendix at the end of this model for additional restrictions)				
23YA00-B0	Avail. w/ 153" wb (Incl. 18" deck: 1-18" tread plate)	39	423.00	0	0
23YA00-B1	Avail. w/ 165" wb (Incl. 30" deck: 1-30" tread plate)	42	497.00	0	0
23YA00-B2	Avail. w/ 177" wb (Incl. 42" deck: 1-18" & 1-24" tread plate)	53	575.00	0	0
23YA00-B3	Avail. w/ 189" wb (Incl. 54" deck: 1-24" & 1-30" tread plate)	56	651.00	0	0
23YA00-B4	Avail. w/ 207" wb (Incl. 72" deck: 1-18" & 1-30" tread plate)	70	763.00	0	0
23YA00-B5	Avail. w/ 213" wb (Incl. 78" deck: 1-18" & 2-30" tread plates)	73	801.00	0	0
23YA00-B6	Avail. w/ 225" wb (Incl. 90" deck: 3-30" tread plates)	70	875.00	0	0
STD.	Cab Mounts, Front — Trunnion (Standard)	—	—	S	S
	Cab Suspension, Rear				
STD.	Conventional Rubber (Standard)	—	—	S	S
23LT00-AA	Hydromount (Avail. w/tractor or on-highway truck only)	2	117.00	0	0
	Glass				
STD.	Door Vent Windows, Solar Tinted L.H./ R.H. (Two-way w/locking latch) (Standard)	—	—	S	S
23LX00-AA	Rear Window, DELETE (Avail. w/tractor only)	0	CR 55.00	0	0
23YL00-AA	Rear Window, Fixed — Solar Tinted (Avail. w/truck only; Incl. w/tractor)	15	55.00	0	0
STD.	Rear Window, None (Standard)	—	—	S	S
STD.	Windshield & Side Glass — Solar Tinted (Standard)	—	—	S	S
	Grille, Hood Mounted				
232H00	— Painted Body Color (Standard)	—	—	S	S
233C00-AA	Headlamp Bezels, Bright (Avail. w/forward tilting fiberglass hood Code 23AB00, 232000 or 232600 only)	0	37.00	0	0
232R00-AA	Hood, Accent Bar — Bright (Avail. w/forward tilting fiberglass hood Code 23AB00, 232000 or 232600 only)	3	43.00	0	0
233W00	Hood, Sloped Aerodynamic, Forward Tilting, Fiberglass (Standard)	—	—	S	S
23AB00	Hood, Forward Tilting	—	—	0	0
	Hood, Forward Tilting, Fiberglass				
232000-AD	— With Full Butterfly Opening (Oil fill & dipstick, serviceability enhanced Code 373900 is recommended w/Cum. ISB/ISC eng.)	N/A	671.00	0	0
232600-AA	— With R.H. Butterfly Opening Ready-Line Access Door (Oil check & fill) (N.A. w/full butterfly opening Code 23200 or Cum. ISB eng.) (Req. oil fill & dipstick, serviceability enhanced Code 373900 w/Cum. ISC eng.) (N.A. w/Cat. 3126 eng.)	12	519.00	0	0
23KH00	Horn, Single — Electric (Standard)	—	—	S	S

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	23 — CAB EQUIPMENT/ EXTERIOR (Continued)				
	Horns, Dual				
23CV00-BJ	— Electric	1	17.00	0	0
23CW00-BM	— Air, Single Base (N.A. w/Hadley air horns Code 23CX00)	3	95.00	0	0
23CX00-A5	— Air, Hadley Rectangular, Dual Base (N.A. w/single base air horns Code 23CW00; Roof fairing pkg. Code 23YF00 or cab aero prep. pkg. Code 23E100)	11	121.00	0	0
	Mirrors, Dual Western (Auxiliary convex mirrors are NOT included)				
23YX00	— Painted Med. Titanium (Standard)	—	—	S	S
23YY00-AA	— Bright (1)	0	73.00	0	0
233L00-AA	— Bright, Heated (Incl. I/P switch w/"On" indicator) (1)	1	153.00	0	0
23Y000-AA	— Bright, Lighted (1)	1	104.00	0	0
23Y200-AA	— Bright, Lighted & Heated (Incl. I/P switch w/"On" indicator) (1)	1	184.00	0	0
233K00-AA	— Bright, Motorized, Heated (Incl. I/P switch w/"On" indicator) (1)	8	891.00	0	0
23Y300-AA	— Bright, Motorized, Lighted & Heated (Incl. I/P switch w/"On" indicator) (1)	9	921.00	0	0
233J00-AA	— Bright, Motorized-R.H., Manual-L.H., Heated (Incl. I/P switch w/"On" indicator) (1)	5	660.00	0	0
23Y400-AA	— Bright, Motorized-R.H., Manual-L.H., Lighted & Heated (Incl. I/P switch w/"On" indicator) (1)	5	691.00	0	0
	Mirrors, Auxiliary Convex (Painted aux. w/painted western mirrors only & bright aux. w/bright western mirrors only except "Sweet Spot" which may be used with either painted or bright western mirrors)				
	— 5.5" Dia., Bottom Mounted				
233B00	— w/ Painted Mirrors, R.H. only (Standard)	—	—	S	S
230Y00-AD	— w/ Painted Mirrors, L.H. & R.H.	1	15.00	0	0
230100-AC	— w/ Bright Mirrors, 2	1	13.00	0	0
	4 — 5.5" Dia., 2 Top & 2 Bottom Mounted				
23Y600-AA	— w/ Painted Mirrors	1	45.00	0	0
23Y700-AA	— w/ Bright Mirrors	1	45.00	0	0
	2 — 8" Dia., Bottom Mounted (8-7/8" actual size)				
23Y800-AA	— w/ Painted Mirrors	2	21.00	0	0
23Y900-AA	— w/ Bright Mirrors	2	21.00	0	0
	4 — 8" Dia., 2 Top & 2 Bottom Mounted (8-7/8" actual size)				
230A00-AA	— w/ Painted Mirrors	5	63.00	0	0
230B00-AA	— w/ Bright Mirrors	5	63.00	0	0
232X00-AA	2 — "Sweet Spot" (Painted Black)	0	97.00	0	0
230V00-AA	Dual — 8" Dia., Bright Head & Mounting Arms, Fender Mounted, 3-Pt. Mounting (7 7/8" actual size w/standard aerodynamic hood, Code 233W00; 8 7/8" actual size w/all optional hoods, Codes 23AB00, 232000 and 232600)	4	149.00	0	0
231P00-AA	Single R.H. — 8" Dia., Bright Head & Mounting Arms, Fender Mounted, 3-Pt. Mounting (7 7/8" actual size w/standard aerodynamic hood, Code 233W00; 8 7/8" actual size w/all optional hoods, Codes 23AB00, 232000 and 232600)	3	75.00	0	0
23BN00-C5	Mirrors, Delete Aux. Convex	-1	CR 15.00	0	0
	Mirror Arms				
23RA00	— 96" (Standard w/truck)	—	—	S	S
23RA00-AF	— 96" (Avail. w/tractor only)	-1	CR 15.00	0	0
23BP00-CL	— 102" (Avail. w/truck only; Incl. w/tractor)	-1	15.00	0	0
23YM00-AA	Splash Guard, Wheel Lip — Rubber	9	144.00	0	0
23DD00-AA	Sun Visor, Fiberglass, Exterior (N.A. w/full aero pkg. Code 23YG00, roof fairing pkg. Code 23YF00 or aero prep. pkg. Code 23E100) (Req. Special Paint Option 43)	13	163.00	0	0
STD.	Windshield Wipers, Interval, Electric (w/lift-off "Wet Arm" windshield wiper arms and integral nozzles, electric washer pump & 8-Liter reservoir) (Standard)	—	—	S	S

(1) N.A. w/painted aux. convex mirrors exc. "Sweet Spot"

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	24 — CAB EQUIPMENT/ INTERIOR				
24AJ00-BK	Air Conditioning, Integral w/ Heater *	46	833.00	O	O
24AL00	Cigar Lighter I/P Mounted (<i>Standard</i>)	—	—	S	S
24K900-AB	Console, Storage — Floor Mounted (<i>Incl. cup holders (2), coin tray, storage bin, CB radio bin, tray & thermos holder; N.A. w/2-pass seat Code 25AADF or MT automatic trans. (Req. I/P mtd. shift control w/MD auto. trans.)</i>).....	8	107.00	O	O
24K700-AB	— Header Mounted (<i>Avail. w/Prestige interior trim only; Incl. header mounted single CB hot post & ground</i>).....	5	207.00	O	O
24GC00-AA	Door Locks, Electric L.H. & R.H. (<i>N.A. w/Value interior trim Code 22BJ00</i>)	0	141.00	O	O
STD.	Door Locks, Manual L.H. & R.H. (<i>Standard</i>)	—	—	S	S
24B400-BT	Export Decal (<i>For Export only</i>)	0	NC	O	O
24J600-AA	Filter Pkg., Environmental (<i>Incl. fresh air inlet dust filter & recirculated air filter</i>)	2	55.00	O	O
STD.	Floor Mat, Full Vinyl, Med. Dark Graphite (<i>Standard</i>)	—	—	S	S
STD.	Heater, Defroster/ Demister and Fresh Air Ventilation (<i>Standard</i>)	—	—	S	S
STD.	Lamp, Dome, Center Mounted (<i>Standard</i>)	—	—	S	S
24J900-AA	Lamp, Dome & Reading, Center Mounted (<i>Avail. w/Prestige interior trim only</i>)	0	36.00	O	O
24LB00-AA	Lamp, Reading, Over-Door (2) (<i>Avail. w/Prestige interior trim only</i>)	0	71.00	O	O
24AM00-AJ	Map Pocket, L.H. Door — Avail. w/ Value interior trim Code 22BJ00 only; Incl. w/ Custom trim Code 22BW00 or Prestige interior trim	1	15.00	O	O
24KA00-AA	Radio, CB Antenna, Dual — Mirror Mounted (<i>Incl. single CB hot post & ground mounted in either I/P or header console</i>)	1	204.00	O	O
24BF00-AA	Hot Post & Ground — Dual, I/P Mounted (<i>N.A. w/header mounted storage console Code 24K700</i>) ...	1	36.00	O	O
24AH00-BA	— Single, I/P Mounted (<i>Avail. with or without header mounted storage console Code 24K700</i>).....	0	19.00	O	O
24KB00-AA	Radio, Electronic (<i>Incl. digital clock</i>) Premium Sound (<i>Incl. power amplifier & four speakers</i>) — AM/FM Stereo w/ Cassette Tape Deck	12	707.00	O	O
24AF00-CF	Standard Sound (<i>Incl. two speakers</i>) — AM/FM Stereo	10	463.00	O	O
24H200-AA	— AM/FM Stereo w/ Cassette Tape Deck & Weather Band (<i>Incl. dual display, scan & alarm clock</i>).....	11	537.00	O	O
STD.	Radio, None (<i>Standard</i>)	—	—	S	S
24KC00-AA	Radio Prep. Pkg. (<i>Incl. antenna, antenna lead, two speakers, bezel, mounting bracket & hot lead; Wired for AM/FM Stereo radio</i>)	2	104.00	O	O
24KD00-AA	Steering Column, Adjustable (<i>N.A. w/std. turn signal switch Code 26C700</i>) — Tilt Only	5	319.00	O	O
24KE00-AA	— Tilt and Telescope	7	443.00	O	O
STD.	Steering Column, Stationary (<i>Standard</i>)	—	—	S	S
24B500	Steering Wheel — 18" Dia. (<i>Standard</i>)	—	—	S	S
24KF00-AA	— 18" Dia., Leather Wrapped	0	53.00	O	O
24AP00-B9	— 21" Dia. (<i>Will reduce steering effort approximately 20%; Drivers will experience a lighter road feel than w/18" steering wheel</i>) (<i>N.A. w/speed/cruise control Code 37A100</i>) (<i>N.A. w/crankshaft PTO Code 374D00</i>)	2	11.00	O	O
STD.	Sun Visors, Single, Vinyl — L.H. & R.H. (<i>Incl. ticket strap</i>) (<i>Standard</i>)	—	—	S	S
24KG00-AA	Sun Visors, Two Way, Vinyl, Integral Side — L.H. & R.H. — w/ Value or Custom trim (<i>Incl. ticket strap</i>)	0	65.00	O	O
24KG00-AB	— w/ Prestige trim (<i>Incl. storage pouch</i>)	0	73.00	O	O

* Price excludes Federal Excise Tax of \$100.00 (cdn.). Applies for Canada only.

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	24 — CAB EQUIPMENT/ INTERIOR (Continued)				
24KJ00-AA	Window Control — Electric — R.H. Side w/ L.H. Control (Avail. w/Value interior trim Code 22BJ00 only)	4	127.00	0	0
24KK00-AA	— R.H. & L.H. Sides w/ Dual Control (Avail. w/Custom trim Code 22BW00 or Prestige interior trim only)	8	261.00	0	0
STD.	Window Control — Manual (Side Windows) (Standard)	—	—	S	S
24KL00-AA	Window, Observation — R.H. Door (Incl. wide angle Fresnel lens; R.H. side window drop is restricted) (Deletes R.H. door mtd. map pocket w/Custom or Prestige interior trim)	2	175.00	0	0
	25 — SEATING				
	(Seats are color coordinated to cab trim level. Passenger seat matches driver seat in appearance and material; All seats include seat belts)				
25AAC0-AA	Bostrom, Mid-Back, Talladega (Incl. Fore-Aft isolator) Driver, Air-T915, Air Suspension	17	192.00	0	0
25AAC9-AA	Passenger, Air-T915, Air Suspension	72	511.00	0	0
	Bostrom, Hi-Back, Talladega (Incl. Fore-Aft isolator) (N.A. w/armrests w/auto. trans.)				
25AAC4-AA	Driver, Air-T915, Air Suspension	17	353.00	0	0
25AAC4-AJ	w/ Value or Custom cab interior trim	27	353.00	0	0
	Passenger, Air-T915, Air Suspension				
25AADD-AA	w/ Value or Custom cab interior trim	71	527.00	0	0
25AADD-AJ	w/ Prestige cab interior trim	71	527.00	0	0
	National, Mid-Back (Incl. Fore-Aft isolator except Codes 25AACW, 25AAC5 or 25AAC6)				
25AACW	Driver, Fixed Base, Less Isolator (Standard)	—	—	S	S
25AACX-AA	Driver, Fixed Base	2	15.00	0	0
25AACY-AA	Driver, Air Suspension	52	155.00	0	0
25AAC5-AA	Passenger, Fixed Base "Economy" — Non-Adj., Less Isolator	56	168.00	0	0
25AAC6-AA	Passenger, Fixed Base, Less Isolator	56	236.00	0	0
25AAC7-AA	Passenger, Fixed Base	56	252.00	0	0
25AAC8-AA	Passenger, Air Suspension	78	473.00	0	0
25GH00	Passenger, None (Standard)	—	—	S	S
	National, Hi-Back (Incl. Fore-Aft isolator) (N.A. w/pedestal mtd. auto. trans. shift control)				
25AAC1-AA	Driver, Fixed Base	7	CR 7.00	0	0
25AAC2-AA	Driver, Air Suspension	49	171.00	0	0
25AADA-AA	Passenger, Fixed Base	51	251.00	0	0
25AADB-AA	Passenger, Air Suspension	63	488.00	0	0
	National, Companion, Two Passenger, Fixed Base — Non-Adj. (Req. brake control valve delete Code 19BV00 when ordered w/trailer towing pkg. Code 19NH00 or tractor pkg.) (N.A. w/floor mounted storage console Code 24K900)				
25AADF-AA	w/ National Driver Seat (Deletes driver seat cup holder)	61	457.00	0	0
25AADF-AD	w/ Bostrom Driver Seat	61	475.00	0	0

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	OTHER SEATING EQUIPMENT				
25AADJ-AA	Armrests, Dual (Avail. w/Mid-Back & Hi-Back seats; N.A. w/pedestal mtd. auto. trans. shift control) Driver only	5	72.00	0	0
25AADK-AA	Passenger only (N.A. w/individual seat Code 25AAC5 or 2 pass. seat Code 25AADF)	5	72.00	0	0
25AAEF-AB	Base Cover, Air Suspension (Avail. w/National air suspension seats; Incl. w/Bostrom Hi-Back seats Codes 25AAC4 & 25AADD w/Prestige interior trim; N.A. w/Bostrom Mid-Back seats Codes 25AAC0 & 25AAC9) Driver only	2	63.00	0	0
25AAEG-AB	Passenger	2	63.00	0	0
25AAD3	Belts, Seat — Lap and Shoulder, 3-pt. mounting w/ Adjustable D-Ring Driver only (Standard)	—	—	S	S
25AAT0-AA	Passenger only (Incl. w/passenger seat option)	0	NC	0	0
25AADN-AA	Cushion, Seat, Heated — Electric (Avail. w/National air susp. seat only; N.A. w/swivel base) Driver only	1	108.00	0	0
25AADP-AA	Passenger only	1	108.00	0	0
25AADR-AA	Headrest, Four-Way Adjustable (Avail. w/mid-back seats only) Driver only	2	164.00	0	0
25AADT-AA	Passenger only (N.A. w/National "less isolator" seats Code 25AAC5 or 25AAC6) ..	2	164.00	0	0
25AADV-AA	Lumbar Support, Air (Incl. w/all National air suspension seats Codes 25AACY, 25AAC2, 25AAC8 & 25AADB; Incl. w/Bostrom Hi-Back seats Codes 25AAC4 & 25AADD w/Prestige interior trim; N.A. w/Bostrom Mid-Back seats Codes 25AAC0 & 25AAC9; Avail. w/all other National seats except Code 25AAC5) Driver only	0	31.00	0	0
25AADW-AA	Passenger only (N.A. w/Code 25AAC5) (N.A. w/2-pass. seat Code 25AADF)	0	31.00	0	0
25AADX-AA	Map Pocket, Back of Seat (Incl. & avail. w/Bostrom Hi-Back seats Codes 25AAC4 & 25AADD w/Prestige interior trim only; N.A. w/Bostrom Mid-Back seats Codes 25AAC0 & 25AAC9; N.A. w/"Less Isolator" seats Codes 25AACW, 25AAC5 or 25AAC6) Driver only	1	11.00	0	0
25AADY-AA	Passenger only (N.A. w/2-pass. seat Code 25AADF)	1	11.00	0	0
25AAD0-AA	Swivel Base, Seat, Adjustable (Avail. w/National air suspension seats Codes 25AACY, 25AAC2, 25AAC8 & 25AADB; Avail. w/Bostrom Hi-Back seats Codes 25AAC4 & 25AADD w/Prestige interior trim; N.A. w/Bostrom Mid-Back seats Codes 25AAC0 & 25AAC9; N.A. w/heated cushion Codes 25AADN or 25AADP; N.A. w/auto. trans.) (Req. I/P mtd. shift control w/MD auto. trans.) Driver only	17	75.00	0	0
25AAD1-AA	Passenger only (N.A. w/2-pass. seat Code 25AADF)	17	75.00	0	0

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	26 — INSTRUMENTS/ GAUGES/ SWITCHES/ WARNING DEVICES				
26MR00	Air Cleaner Restriction Indicator	—	—	S	S
26MT00-AA	Air Cleaner Mounted (<i>Standard</i>)	8	27.00	O	O
	I/P Mounted				
26MP00-AA	Gauges				
	— Brake Application Air Pressure (<i>N.A. w/tandem axle in comb. w/main locking diff. Code 13AW00, air susp. dump valve Code 48AC00, and inside/outside air code 373T00 or air slide fifth wheel</i>)	0	76.00	O	O
26NN00	— Electronic Cluster (<i>Incl. speedometer, tachometer, fuel level, coolant temp., voltmeter, oil press. & dual air brake press.</i>) (<i>Standard</i>)	—	—	S	S
26AM00-A5	— Hour Meter (<i>Located in tachometer</i>)	1	59.00	O	O
26NP00-AC	— Individual Round (<i>Incl. speedometer, tachometer, fuel level, coolant temp., voltmeter, oil pressure & dual air brake press.</i>) (<i>In lieu of std. electronic cluster Code 26NN00</i>)	0	213.00	O	O
	— Temperature, Rear Axle Lube				
26AN00-AV	— w/ single Rear Axle	1	49.00	O	
26AN00-A0	— w/ tandem Rear Axle	2	99.00		O
26AP00-AV	— Temperature, Transmission Oil (<i>N.A. w/FS- manual or any auto. transmission</i>)	2	29.00	O	O
26M700	Gauges — Control Panel, Flat Gauge Insert — R.H. (<i>Standard</i>)	—	—	S	S
STD.	Parking Brake Control, I/P Mounted (<i>Standard</i>)	—	—	S	S
26AX00-BT	Speedometer, Metric (<i>N.A. in U.S.</i>)	0	NC	O	O
26C700	Turn Signal Switch, Self-Cancelling (<i>Incl. w/truck w/std. stationary steering column</i>) (<i>N.A. w/tilt strg. column Code 24KD00, tilt/telescope strg. Code 24KE00 or trailer towing pkg. 19NH00</i>) (<i>Standard</i>)	—	—	S	S
	Turn Signal Switch, Signal Stat				
26MY00-AA	— Non-Cancelling (<i>Incl. w/tractor and with truck with tilt Code 24KD00 or Telescopic Code 24KE00 steering column; Avail. w/truck w/stationary steering column</i>)	0	107.00	O	O
	Warning Lights				
STD.	— ABS Anti-Lock System (<i>Standard</i>)	—	—	S	S
STD.	— High Beam Indicator (<i>Standard</i>)	—	—	S	S
STD.	— Turn Signal Indicators (<i>Standard</i>)	—	—	S	S
STD.	Warning Light & Buzzer — Air Brakes (<i>Standard</i>)	—	—	S	S
	27 — ELECTRICAL				
STD.	Canadian Daytime Running Lights (<i>Standard in Canada only</i>)	—	—	S	S
270P00-BJ	Daytime Running Lights (<i>N.A. in Canada</i>)	0	65.00	O	O
	Circuits, Customer Access				
276H00-AA	— Auxiliary Circuits Pkg.	1	65.00	O	O
STD.	— I/P Fuse Panel Pkg. (<i>Standard</i>)	—	—	S	S
	— Access Circuits Box				
27AA80-AA	— Engine Compartment	1	31.00	O	O
27AA70-AA	— Rear of Chassis (<i>N.A. w/tractor applications</i>)	1	31.00	O	O
STD.	— Access Circuits Connector (<i>Engine compt., rear of cab & rear of chassis w/truck applications; Eng. compt. & rear of cab w/tractor applications</i>) (<i>Standard</i>)	—	—	S	S
276L00-AB	— Switch Pkg., Auxiliary	0	29.00	O	O
	Circuit Protectors				
27AL00-AE	Breakers, Automatic Reset	N/A	283.00	O	O
STD.	Fuses (<i>Standard</i>)	—	—	S	S
STD.	Flasher, Emergency (<i>Standard</i>)	—	—	S	S
27AC00-A9	Lamps, Turn Signal, Fender Mounted, Supplemental (<i>In addition to std.</i>) (<i>N.A. w/std. turn signal switch Code 26C700</i>)	1	71.00	O	O

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	27 — ELECTRICAL (Continued)				
STD.	Lamps, Turn Signal & Side Marker Combination, Rear/ Side Facing, Hood Mounted (Standard)	—	—	S	S
	Lights, Auxiliary (Mounted in the full width bumper or below the cut-off bumper Code 59AL00) (Incl. I/P mounted switch) (N.A. w/front bumper ext. Code 59HC00 or front frame ext. Code 40GB00) (N.A. w/19.5" wheels in comb. w/cut-off front bumper Code 59AL00)				
27G800-A5	— Driving Lights (N.A. w/fog lights Code 27G700)	5	131.00	O	O
27G700-A5	— Fog Lights (N.A. w/driving lights Code 27G800)	5	131.00	O	O
	Lights				
	Cab Marker, 5 Lights				
STD.	— Standard (N.A. w/full Aero pkg. Code 23YG00, roof fairing pkg. Code 23YF00 or cab prep. pkg. Code 23E100) (Standard)	—	—	S	S
274800-AB	— Premium (N.A. w/full Aero pkg. Code 23YG00, roof fairing pkg. Code 23YF00 or cab prep. pkg. Code 23E100).....	0	48.00	O	O
STD.	Head, Two Halogen, Dual Beam (Incl. stalk mounted switch for dimmer and flash to pass) (Standard)	—	—	S	S
STD.	Tail, Two w/ Integral Stop, Turn, Backup, and License Plate (Mounted inside frame rails) (Standard)	—	—	S	S
273300-AA	Trailer Hook-Up, Aimable (Avail. for tractor applications only; use in addition to fixed or Unipac hookup light; Incl. I/P switch w/"On" indicator)	2	37.00	O	O
27AB00-A6	Trailer Hook-Up, Fixed (Avail. for truck applications only; Incl. w/tractor Pkg.; Incl. I/P switch w/"On" indicator)	1	41.00	O	O
27AAR0-AA	Truck-Lite, Rear Lighting System (In lieu of std.) (N.A. w/tractor ramp frame Crossmember code 40EX00 or truck w/trailer pkg. Code 19NH00)	1	167.00	O	O
	Taillight Mounting				
STD.	— Inside Frame Rails — 21.56" Spacing (Standard)	—	—	S	S
275600-AB	— Outside Frame Rails — 46.07" Spacing (N.A. w/tractor ramp frame crossmember Code 40EX00 or Truck-Lite Code 27AAR0 or 51" Airliner tandem susp. w/60" AF)	0	23.00	O	O
276R00-AB	— Rear Frame Crossmember (N.A. w/truck or w/truck w/trailer pkg. Code 19NH00, tractor ramp frame crossmember Code 40EX00 or Truck-Lite Code 27AAR0)	-3	23.00	O	O
	28 — ALTERNATORS				
28BK00	— 95 amp., 1425 watt Motorcraft, Internally Regulated (N.A. w/Cat. 3126 or Cum. ISB eng.) (Standard)	—	—	S	S
28B300-BJ	— 100 amp., 1400 watt Delco 21 SI, Internally Regulated	-8	19.00	O	O

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	29 — BATTERIES/ BOXES/ CABLES (Refer to the Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions)				
29HM00	Battery, Maintenance-Free Sterling, 12-Volt — Two, 600 CCA (65 amp.-hr.) (Standard)	—	—	S	S
29HN00-AP	— Three, 600 CCA (65 amp.-hr.) (N.A. w/Cum. ISB eng.)	47	107.00	0	0
29AP00-BT	— Two, 625 CCA (93 amp.-hr.)	12	49.00	0	0
29AG00-BT	— Three, 625 CCA (93 amp.-hr.) (N.A. w/Cum. ISB eng.)	65	173.00	0	0
29AJ00-B3	— Two, 625 CCA (96 amp.-hr.) (Cycle Power)	18	67.00	0	0
29AK00-B8	— Three, 625 CCA (96 amp.-hr.) (Cycle Power) (N.A. w/Cum. ISB eng.)	74	199.00	0	0
29GM00-BM	— Two, 900 CCA (96 amp.-hr.) (N.A. w/Cum. ISB eng.)	18	63.00	0	0
29KF00-AA	Battery Box, Frame Mounted Aft of Cab, Standard Weight, L.H. (Avail. w/forward mtd. L.H. or R.H. single, or forward mtd. dual fuel tanks)	0	67.00	0	0
29KD00-AA	Under Cab, Lightweight — Forward Mounted (Incl. frame mtd. cab access steps) (Avail. w/on-highway service only) L.H. (Avail. w/forward or rear mtd. R.H. fuel tanks; Avail. w/rear mtd. L.H. single or rear mtd. dual fuel tanks)	-12	128.00	0	0
29LJ00-AA	R.H. (Avail. w/forward mtd. L.H. single fuel tanks only) (N.A. w/dual or mixed tanks)	-12	195.00	0	0
29KE00	Under Cab, Standard Weight — Forward Mounted (Incl. frame mtd. cab access steps) L.H. (Avail. w/forward or rear mtd. R.H. fuel tanks, rear mtd. L.H. single or rear mtd. dual fuel tanks) (Standard)	—	—	S	S
29LG00-AA	R.H. (Avail. w/forward mtd. L.H. single fuel tanks only) (N.A. w/dual or mixed tanks)	0	67.00	0	0
29KG00-AA	Battery Terminals, Remote (Jump start studs)	0	31.00	0	0
	30 — ENGINES				
	(Engine listings show Advertised Horsepower/Advertised Torque/Governed RPM; For specific ratings and performance curves, see Eng. Section of the Component Info. Data Book; See Safety-Noise-Emission Section of Component Book) CATERPILLAR 3126 (ELECTRONIC) DIESEL (Incl. Cat. 1R0739 full-flow oil filter, Cat. 1R0751 fuel filter, electronic fuel pump & governor, air intake heater & engine warning derate system) (Requires min. 100 amp Delco alternator) (Incl. cast iron flywheel housing) (N.A. w/ether cold start aid Code 374F00)				
30Y700-AA	— 175 HP/ 420 lb.-ft./ 2500 RPM (3)	38	CR 3813.00	0	
30Y800-AA	— 190 HP/ 520 lb.-ft./ 2500 RPM (3)	38	CR 3139.00	0	
30Y900-AA	— 210 HP/ 520 lb.-ft./ 2500 RPM (3)	38	CR 1827.00	0	
300600-AA	— 210 HP/ 605 lb.-ft./ 2500 RPM (3)	38	CR 1827.00	0	0
30Y000-AA	— 230 HP/ 660 lb.-ft./ 2400 RPM (3)	38	CR 512.00	0	0
30Y100-AA	— 250 HP/ 660 lb.-ft./ 2400 RPM (3)	38	1028.00	0	0
30Y200-AA	— 250 HP/ 800 lb.-ft./ 2400 RPM (1) (4) (5)	84	1028.00	0	0
30Y300-AA	— 275 HP/ 800 lb.-ft./ 2400 RPM (1) (4) (5)	84	2683.00	0	0
30Y400-AA	— 275 HP/ 860 lb.-ft./ 2400 RPM (1) (4) (5)	84	2683.00	0	0
30Y500-AA	— 300 HP/ 800 lb.-ft./ 2400 RPM (1) (4) (5)	84	4239.00	0	0
30Y600-AA	— 300 HP/ 860 lb.-ft./ 2400 RPM (1) (4) (5)	84	4239.00	0	0

(1) Incl. 14", 2-plate ceramic manual adjust. 900 lb.-ft. clutch Code 36AM00.

(3) Incl. 830 sq. in. rad. w/1.5" cu/br core in comb. w/auto.trans.

(4) Incl. Kysor "on-off" fan clutch Code 373600 in comb. w/auto. trans.

(5) Incl. extra cooling radiator Code 37AN00 in comb. w/auto. trans.

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	30 — ENGINES (Continued)				
	(Engine listings show Advertised Horsepower/Advertised Torque/Governed RPM; For specific ratings and performance curves, see Eng. Section of the Component Book; See Safety-Noise-Emission Section of Component Info. Data Book) (Continued) CUMMINS ISB (ELECTRONIC) DIESEL (Deletes coolant filter/conditioner; Incl. single 1-qt. Fleetguard LF-3349 full-flow spin-on oil filter) (Incl. air intake heater) (N.A. w/forward tilting hood with R.H. butterfly opening ready-line access door (Code 232600) or other cold start aid Code 374F00)				
300B00-AA	— ISB-175 HP/ 420 lb.-ft./ 2500 RPM (3)	-480	CR 3012.00	0	
300C00-AA	— ISB-190 HP/ 520 lb.-ft./ 2600 RPM (3) (4)	-480	CR 2339.00	0	
300D00-AA	— ISB-195 HP/ 520 lb.-ft./ 2500 RPM (3)	-480	CR 2339.00	0	
300E00-AA	— ISB-210 HP/ 520 lb.-ft./ 2600 RPM (3) (5)	-480	CR 1027.00	0	
300F00-AA	— ISB-215 HP/ 520 lb.-ft./ 2500 RPM (3)	-480	CR 1027.00	0	
300G00-AA	— ISB-215 HP/ 605 lb.-ft./ 2500 RPM (3)	-480	CR 1027.00	0	
300H00-AA	— ISB-230 HP/ 605 lb.-ft./ 2500 RPM (3)	-480	287.00	0	
300J00-AA	— ISB-230 HP/ 660 lb.-ft./ 2500 RPM (3)	-480	287.00	0	
300K00-AA	— ISB-250 HP/ 660 lb.-ft./ 2500 RPM (3)	-480	1587.00	0	
	CUMMINS ISC (ELECTRONIC) DIESEL (Incl. air intake heater)				
300P00	— ISC-215 HP/ 620 lb.-ft./ 2400 RPM (3) (Standard)	—	—	S	S
300Q00-AA	— ISC-230 HP/ 660 lb.-ft./ 2400 RPM (3)	0	1841.00	0	0
300R00-AA	— ISC-250 HP/ 660 lb.-ft./ 2400 RPM (3)	0	3360.00	0	0
300S00-AA	— ISC-250 HP/ 800 lb.-ft./ 2200 RPM (1) (7)	58	3360.00	0	0
301K00	— ISC-275 HP/ 800 lb.-ft./ 2200 RPM (1) (7)	—	—	0	0
300T00-AA	— ISC-285 HP/ 860 lb.-ft./ 2200 RPM (1) (7)	58	5016.00	0	0
300U00-AA	— ISC-300 HP/ 950 lb.-ft./ 2200 RPM (2) (7)	46	6904.00	0	0
	32 — EXHAUST SYSTEM (Refer to Exhaust Restriction charts in the Appendix at the end of this model for additional restrictions.) (See Component Book for installation sketches)				
32FD00	SINGLE HORIZONTAL MUFFLER & HORIZONTAL OUTLET, R.H. (N.A. w/26.0SM frame) (Standard)	—	—	S	S
	SINGLE HORIZONTAL MUFFLER WITH STRAIGHT VERTICAL OUTLET STACK, R.H. (N.A. w/26.0 SM frame)				
	CAB MOUNTED (Incl. exhaust heat shield)				
	— Over Frame — Cab Mtd. (N.A. w/full aero pkg. Code 23YG00, cab side extenders Code 231F00, aero reinforcements only pkg. Code 23E100, flywheel PTO Code 37EF00, or 153" wb w/severe duty crossmember)				
32FE00-AA	— Plain Outlet	65	320.00	0	0
32FG00-AA	— Bright Outlet	67	527.00	0	0
	— Under Frame — Cab Mtd. (Avail. w/L.H. fuel tanks only) (N.A. w/full aero pkg. Code 23YG00, cab side extenders Code 231F00, or aero reinforcements only pkg. Code 23E100)				
32FF00-AA	— Plain Outlet	65	320.00	0	0
32FH00-AA	— Bright Outlet	67	527.00	0	0

(1) Incl. 14", 2-plate ceramic manual adjust. clutch Code 36AM00.

(2) Incl. 14", 2-plate ceramic adjustment-free 1050 lb.-ft. clutch Code 36FQ00.

(3) Incl. 830 sq. in. rad. w/1.5" cu/br core in comb. w/auto. trans.

(4) Avail. only with Allison trans. AT-542 or AT-545.

(5) Avail. only with Allison trans. AT-545.

(7) Incl. 900 sq. in. rad. 2" with cu/br core in comb. w/auto. trans.

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	32 — EXHAUST SYSTEM (Refer to Exhaust Restriction charts in the Appendix at the end of this model for additional restrictions.) (See Component Book for installation sketches) (Continued)				
	SINGLE HORIZONTAL MUFFLER WITH STRAIGHT VERTICAL OUTLET STACK, R.H. (N.A. w/26.0 SM frame) (Continued)				
	FRAME MOUNTED				
	— Over Frame — Frame Mtd. (N.A. w/flywheel PTO Code 37EF00 or 153" wb w/severe duty crossmember)				
	— Use without full aero pkg. Code 23YG00 or cab side extenders Code 231F00; Also use w/aero prep. pkg. Code 23E100. (Incl. exhaust heat shield)				
32FJ00-AA	— Plain Outlet	110	320.00	0	0
32FL00-AA	— Bright Outlet	112	527.00	0	0
	— Use with full aero pkg. Code 23YG00 or cab side extenders Code 231F00; Also use w/aero prep. pkg. Code 23E100. (Exhaust heat shield deleted)				
32FJ00-AE	— Plain Outlet	104	320.00	0	0
32FL00-AE	— Bright Outlet	106	527.00	0	0
	— Under Frame — Frame Mtd. (Avail. w/L.H. fuel tanks only)				
	— Use without full aero pkg. Code 23YG00 or cab side extenders Code 231F00; Also use w/aero prep. pkg. Code 23E100. (Incl. exhaust heat shield)				
32FK00-AA	— Plain Outlet	116	320.00	0	0
32FM00-AA	— Bright Outlet	118	527.00	0	0
	— Use with full aero pkg. Code 23YG00 or cab side extenders Code 231F00 (Exhaust heat shield deleted)				
32FK00-AF	— Plain Outlet	110	320.00	0	0
32FM00-AF	— Bright Outlet	122	527.00	0	0
32FN00-AA	SINGLE TRANSVERSE MUFFLER R.H. & HORIZONTAL OUTLET (Avail. w/single L.H. fuel tanks only) (N.A. w/Cum. ISB eng.)	92	159.00	0	0
32GC00-AA	SINGLE TRANSVERSE MUFFLER R.H. & HORIZONTAL OUTLET — Mounted between frame rails (For beverage applications Code AAK00 only) (Avail. w/truck applications only) (Min. 177" wb.)	87	159.00	0	
	SINGLE TRANSVERSE MUFFLER R.H. WITH STRAIGHT VERTICAL OUTLET STACK, R.H. (Avail. w/single L.H. fuel tanks only) (N.A. w/Cum. ISB eng.)				
	CAB MOUNTED (Incl. exhaust heat shield) (N.A. w/full aero pkg. Code 23YG00, cab side extenders Code 231F00 or aero reinforcements only pkg. Code 23E100)				
32FP00-AA	— Plain Outlet	87	368.00	0	0
32FR00-AA	— Bright Outlet	87	443.00	0	0
	SINGLE VERTICAL MUFFLER WITH STRAIGHT VERTICAL OUTLET STACK, R.H. (N.A. w/R.H. clean CA fuel tanks)				
	CAB MOUNTED				
	— Use without full aero pkg. Code 23YG00 or cab side extenders Code 231F00; Use with cab aero prep. pkg. Code 23E100 (Incl. exhaust heat shield)				
32FW00-AA	— Plain Outlet	87	323.00	0	0
32FX00-AF	— Bright Outlet	87	531.00	0	0
	— Use with full aero pkg. Code 23YG00 or cab side extenders Code 231F00 (Exhaust heat shield deleted)				
32FW00-AF	— Plain Outlet	82	323.00	0	0
32FX00-AH	— Bright Outlet	82	531.00	0	0
	FRAME MOUNTED				
	— Use without full aero pkg. Code 23YG00 or cab side extenders Code 231F00; Use with cab aero prep. pkg. Code 23E100. (Incl. exhaust heat shield)				
32FY00-AA	— Plain Outlet	95	323.00	0	0
32F000-AG	— Bright Outlet	95	531.00	0	0
	— Use with full aero pkg. Code 23YG00 or cab side extenders Code 231F00 (Exhaust heat shield deleted)				
32FY00-AF	— Plain Outlet	90	323.00	0	0
32F000-AJ	— Bright Outlet	90	531.00	0	0

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	33 — EXHAUST EQUIPMENT				
33BR00-AM	Rain Cap, Bright (Avail. w/vertical exhaust outlet only) (N.A. w/turn-out elbow Code 33BT00)	4	23.00	0	0
33BT00-AA	Turn-Out, Elbow (In lieu of straight vertical exhaust outlet stack) (N.A. w/rain cap Code 33BR00) (Plain w/plain exh. & bright w/bright exh.)	2	63.00	0	0
	36 — CLUTCHES				
36FA00	Clutch, Eaton-Spicer 14", 1-plate, Ceramic, Manual Adjustment (660 lb.-ft. cap.) (Std. w/Cat. 3126 175 HP Code 30Y700, 190 HP Code 30Y800, 210 HP Code 30Y900, 210 HP Code 300600, 230 HP Code 30Y000 or 250 HP Code 30Y100; all Cum. ISB eng. & w/Cum. ISC-215 HP Code 300P00, 230 HP Code 300Q00 or 250 HP Code 300R00) (Standard)	—	—	S	S
36FB00-AM	14", 1-plate, Ceramic, Adjustment-Free (660 lb.-ft. cap.) (Avail. w/Cat. 3126 175 HP Code 30Y700, 190 HP Code 30Y800, 210 HP Code 30Y900, 210 HP Code 300600, 230 HP Code 30Y000 or 250 HP Code 30Y100; all Cum. ISB eng. & w/Cum. ISC-215 HP Code 300P00, 230 HP Code 300Q00 or 250 HP Code 300R00)	4	52.00	0	0
36AM00-A1	14", 2-plate, Ceramic, Manual Adjustment (900 lb.-ft. cap.) (Avail. w/Cat. 3126 210 HP Code 30Y900, 210 HP Code 300600, 230 HP Code 30Y000 or 250 HP Code 30Y100; Cum. ISB-195 HP Code 300D00, 210 HP Code 300E00, 215 HP Code 300F00, 215 HP Code 300G00, 230 HP Code 300H00, 230 HP Code 300J00 or 250 HP Code 300K00 & w/Cum. ISC-215 HP Code 300P00, 230 HP Code 300Q00 or 250 HP Code 300R00 eng.) (Incl. w/Cat. 3126 250 HP Code 30Y200, 275 HP Code 30Y300, 275 HP Code 30Y400, 300 HP Code 30Y500 or 300 HP Code 30Y600 & Cum. ISC-250 HP Code 300S00, 275 HP Code 301K00 or 285 HP Code 300T00)	33	135.00	0	0
36E800-AY	14", 2-plate, Ceramic, Adjustment-Free (900 lb.-ft. cap.) — Avail. w/Cat. 3126 210 HP Code 30Y900, 210 HP Code 300600, 230 HP Code 30Y000 or 250 HP Code 30Y100; Cum. ISB-195 HP Code 300D00, 210 HP Code 300E00, 215 HP Code 300F00, 215 HP Code 300G00, 230 HP Code 300H00, 230 HP Code 300J00 or 250 HP Code 300K00 & w/Cum. ISC-215 HP Code 300P00, 230 HP Code 300Q00 or 250 HP Code 300R00 eng. only	35	188.00	0	0
36E800-A1	— Avail. w/Cat. 3126 250 HP Code 30Y200, 275 HP Code 30Y300, 275 HP Code 30Y400, 300 HP Code 30Y500 or 300 HP Code 30Y600 & w/Cum. ISC-250 HP Code 300S00, 275 HP Code 301K00 or 285 HP Code 300T00 eng. only	2	52.00	0	0
36FQ00-AA	14", 2-plate, Ceramic, Adjustment-Free (1050 lb.-ft. cap.) (Incl. & only avail. w/Cum. ISC-300 HP Code 300U00 eng. only)	37	NC	0	0
STD.	Clutch Housing, Aluminum (For on-hwy. only) (Standard)	—	—	S	S
36AA00-AL	Clutch Housing, Aluminum (For RT-8908LL trans. only) (For on-hwy. only) (N.A. w/Cat. 3126 eng.)	-53	25.00	0	0
36CC00-AC	Remote Lube Fitting — Clutch Throw-out Bearing	0	15.00	0	0
	37 — ENGINE EQUIPMENT				
373P00-AA	Air Cleaner — Donaldson, Dual element, Two Stage	16	91.00	0	0
375X00-AB	— Donaldson, High Capacity, Single Stage	3	279.00	0	0
STD.	— Donaldson, Single Stage (Standard)	—	—	S	S
373R00-AA	— Farr ECO-II, Single Stage, Disposable	12	315.00	0	0
STD.	Air Intake, Source-Engine — Outside Air (Standard)	—	—	S	S
373T00-AA	— Inside/Outside Air (Incl. in-cab controls) (Avail. w/forward tilting fiberglass hoods Code 23AB00, 232000 or 232600 only) (Avail. w/truck only) (N.A. w/tandem axle in comb. w/main locking differential Code 13AW00 and air susp. dump valve Code 48AC00)	12	580.00	0	0
37TE00-AL	Block Heater, 110 Volt — Single 750 Watt Phillips (Avail. w/Cum. ISB eng. only)	1	36.00	0	0
37TD00-A0	— Single 1000 Watt Phillips (Incl. front mounted cord & receptacle) (N.A. w/Cum. ISB eng.)	1	45.00	0	0

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	37 — ENGINE EQUIPMENT (Continued)				
373W00-AA	Block Heater Receptacle — Under Driver Door Mounted (Avail. w/block heater opt. Code 37TD00 in lieu of front-mounted cord).....	1	61.00	O	O
373X00-AA	Dirt Filter/ Bug Screen, Grille Mounted	2	64.00	O	O
373Y00-AA	Engine Brake, Exhaust (Incl. in-cab controls) (N.A. w/auto. trans.)	15	661.00	O	O
	Engine Mounts				
373000	— Compression Type (Standard)	—	—	S	S
373100-AA	— Focal Mounts (Avail. on-hwy. only) (N.A. w/14,600 lb. F.A. Code 10A200, 16,000 lb. F.A. Code 10AF00, 18,000 lb. F.A. Code 10AD00 or 20,000 lb. F.A. Code 10AH00) (N.A. w/Cat. 3126 eng. or Cum. ISB eng.).....	11	147.00	O	O
373200	Engine Shutoff — Key (Solenoid) (Standard)	—	—	S	S
	Fan Clutch				
373400	— Eaton Viscous (Incl. w/all engines w/man. trans.) (Incl. w/Cat. 3126 175 thru 250 HP/660 lb.-ft. & all Cum. ISB and ISC eng. w/auto. trans.) (Standard)	—	—	S	S
373600-AC	— Kysor "On-Off" (Electrically controlled) (Avail. w/Cat. 3126 eng. & Cum. ISC eng. in comb. w/manual trans.) (Avail. w/Cat. 3126 175 thru 250 HP/660 lb.-ft. & all Cum. ISC eng. w/auto. trans.) (Incl. w/comb. of Cat. 3126 250 HP/800 lb.-ft. thru 300 HP eng. & auto. trans.) (N.A. w/Cum. ISB eng.).....	N/A	315.00	O	O
STD.	Filter, Coolant Conditioner — Fleetguard Spin-On Type (Incl. w/Cum. ISC eng.; N.A. w/Cat. 3126 or Cum. ISB eng.) (Standard)	—	—	S	S
STD.	Filter, Fuel/ Water Separator — Fleetguard, Engine Mtd., Unheated (N.A. w/Cat. 3126) (Standard)	—	—	S	S
STD.	Filter, Oil Single 2.6 qt. Disposable — Fleetguard LF3000 Full-Flow & By-Pass Combo, Spin-On Type (Standard)	—	—	S	S
37W100-AD	Fuel Heater, Electric, Fleetguard (N.A. w/Cat. 3126)	0	117.00	O	O
STD.	Fuel Pump, Electronically Controlled (Standard)	—	—	S	S
STD.	Governor, Electronic (Standard)	—	—	S	S
373800-AA	Hose Pkg., Silicone (Incl. radiator, heater, engine drawdown hoses & torque-controlled clamps)	0	179.00	O	O
STD.	Hose, Radiator, EPDM Rubber (Incl. torque-controlled clamps) (Standard)	—	—	S	S
STD.	Oil Cooler, Integral (Standard)	—	—	S	S
373900-AA	Oil Fill & Dipstick, Serviceability Enhanced (N.A. w/Cat. 3126 eng.) (Req. full butterfly opening hood, Code 232000, w/Cum. ISB eng.)	1	55.00	O	O
STD.	Oil Fill System, Standard Oil Fill & Check (Standard)	—	—	S	S
374D00-AA	Power Take-Off, Crankshaft Driven Damper (Incl. radiator mounted (fixed) grille) (Requires speed/cruise control Code 37A100; Requires extended frame or front bumper extension Code 59HC00) (Avail. w/truck only)	12	304.00	O	O
37EF00-AA	Power Take-Off, Flywheel Driven (Avail. w/truck only; N.A. w/FS-Series trans. or auto. trans.) (N.A. w/Cat. 3126 or Cum. ISB eng.)	154	3308.00	O	O
374B00-AA	Radiator, Clog Resistant (830 sq. in. cooling module w/2.0" cu/br core) (N.A. w/any 275 thru 300 HP eng.) (N.A. w/250 HP/800 lb.-ft. eng. in comb. w/auto. trans.) (N.A. w/extra cooling Code 37AN00)	49	48.00	O	O
37AN00-AX	Radiator, Extra Cooling — 830 sq. in. cooling module w/ 2.00" cu/ br core (Incl. w/Cat. 3126 250 HP/800 lb.-ft. thru 300 HP eng. in comb. w/auto. trans.) (N.A. w/Cum. ISC 250 HP/800 lb.-ft. thru 300 HP eng. in comb. w/auto. trans. which includes 900 sq. in. cooling module w/2.0" cu/br core) (N.A. w/clog resistant radiator Code 374B00)	48	196.00	O	O
STD.	Radiator, Nominal Cooling — 830 sq. in. cooling module w/ 2.00" alum. core (Standard)	—	—	S	S
37A100-AT	Speed/ Cruise Control	N/A	NC	O	O
STD.	Starter, Electric, Delco 12-Volt (Standard)	—	—	S	S
STD.	Starter Interlock (Clutch Pedal Actuated) (Standard)	—	—	S	S

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	40 — FRAME — SINGLE REAR AXLES ONLY				
	Single Channel 13.3 SM, 50,000 PSI				
40AJ00-CD	— 141" wb	0	CR 31.00	0	
40AJ00-BN	— 153" wb	0	CR 31.00	0	
40AJ00-BP	— 165" wb	0	CR 31.00	0	
40AJ00-BR	— 177" wb	0	CR 31.00	0	
40AJ00-BT	— 189" wb	0	CR 31.00	0	
40AJ00-BV	— 207" wb	0	CR 31.00	0	
40AJ00-BW	— 213" wb	0	CR 31.00	0	
40AJ00-BX	— 225" wb	0	CR 31.00	0	
40AJ00-BY	— 237" wb	0	CR 31.00	0	
40AJ00-B0	— 243" wb	0	CR 31.00	0	
40AJ00-B1	— 249" wb	0	CR 31.00	0	
40AJ00-B2	— 261" wb	0	CR 31.00	0	
	Single Channel 10.76 SM, 120,000 PSI				
40E700-AV	— 141" wb	-111	CR 60.00	0	
40E700-AW	— 153" wb	-118	CR 60.00	0	
40E700-AX	— 165" wb	-137	CR 60.00	0	
	Single Channel 13.3 SM, 120,000 PSI				
40E900	— 153" wb (Standard)	—	—	S	
40E900-CP	— 165" wb	0	NC	0	
40E900-CR	— 177" wb	0	NC	0	
40E900-CT	— 189" wb	0	NC	0	
40E900-CV	— 207" wb	0	NC	0	
40E900-CW	— 213" wb	0	NC	0	
40E900-CX	— 225" wb	0	NC	0	
40E900-CY	— 237" wb	0	NC	0	
40E900-C0	— 243" wb	0	NC	0	
40E900-C1	— 249" wb	0	NC	0	
40E900-DD	— 261" wb	0	NC	0	
	Single Channel 15.9 SM, 120,000 PSI				
40FA00-CT	— 153" wb	142	339.00	0	
40FA00-CV	— 165" wb	163	339.00	0	
40FA00-CW	— 177" wb	169	339.00	0	
40FA00-CX	— 189" wb	176	395.00	0	
40FA00-CY	— 207" wb	193	395.00	0	
40FA00-C0	— 213" wb	196	487.00	0	
40FA00-C1	— 225" wb	203	487.00	0	
40FA00-C2	— 237" wb	218	487.00	0	
40FA00-C3	— 243" wb	221	487.00	0	
40FA00-C4	— 249" wb	231	487.00	0	
40FA00-C5	— 261" wb	245	487.00	0	

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	40 — FRAME — TANDEM REAR AXLES ONLY				
	Single Channel 13.3 SM, 50,000 PSI				
40AJ00-B3	— 177" wb	0	CR 31.00		0
40AJ00-B4	— 189" wb	0	CR 31.00		0
40AJ00-B5	— 207" wb	0	CR 31.00		0
40AJ00-B6	— 213" wb	0	CR 31.00		0
40AJ00-B7	— 225" wb	0	CR 31.00		0
40AJ00-B8	— 237" wb	0	CR 31.00		0
40AJ00-B9	— 243" wb	0	CR 31.00		0
40AJ00-CA	— 249" wb	0	CR 31.00		0
40AJ00-CB	— 261" wb	0	CR 31.00		0
	Single Channel 10.76 SM, 120,000 PSI				
40E700-AY	— 153" wb	-129	CR 60.00		0
40E700-A1	— 165" wb	-137	CR 60.00		0
	Single Channel 13.3 SM, 120,000 PSI				
40E900-C2	— 153" wb	-40	NC		0
40E900	— 165" wb (Standard)	—	—		S
40E900-C4	— 177" thru 261" wb	0	NC		0
	Single Channel 15.9 SM, 120,000 PSI				
40FA00-C6	— 153" wb	154	361.00		0
40FA00-C7	— 165" wb	163	361.00		0
40FA00-C8	— 177" wb	169	361.00		0
40FA00-C9	— 189" wb	176	431.00		0
40FA00-DA	— 207" wb	193	431.00		0
40FA00-DB	— 213" wb	196	431.00		0
40FA00-DC	— 225" wb	203	487.00		0
40FA00-DD	— 237" wb	218	487.00		0
40FA00-DE	— 243" wb	221	487.00		0
40FA00-DF	— 249" wb	231	487.00		0
40FA00-DG	— 261" wb	245	487.00		0
	Single Channel, Integral, Extended Frame (24" from front of bumper to face of grille) (Req. crankshaft-driven PTO; Avail. w/walking beam or Neway susp. only; N.A. w/bumper extension Code 59GK00, driving lights Code 27G800 or fog lights Code 27G700)				
	20.25 SM, 125,000 PSI				
40FE00-A0	— 153" wb	380	747.00		0
40FE00-A1	— 165" wb	400	747.00		0
40FE00-A2	— 177" wb	416	747.00		0
40FE00-A3	— 189" wb	432	859.00		0
40FE00-A4	— 207" wb	472	859.00		0
40FE00-A5	— 213" wb	480	859.00		0
40FE00-A6	— 225" wb	496	915.00		0

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	40 — FRAME — TANDEM REAR AXLES ONLY (Continued)				
	Single Channel Inverted "L" Reinforced, All-Bolted Assembly (N.A. w/5th wheel options, 60" front springs or any HAS, HFS or Airliner 40K susp.) 20.5 SM, 120,000 PSI (Straight Rail)				
40FB00-AX	— 177" wb	515	503.00		0
40FB00-AY	— 189" wb	543	615.00		0
40FB00-A0	— 207" wb	613	615.00		0
40FB00-A1	— 213" wb	627	615.00		0
40FB00-A2	— 225" wb	655	672.00		0
40FB00-A3	— 237" wb	718	672.00		0
40FB00-A4	— 243" wb	732	672.00		0
40FB00-A5	— 249" wb	774	672.00		0
40FB00-A6	— 261" wb	830	672.00		0
	Single Channel, Variable Depth Rail 26.0 SM, 120,000 PSI (N.A. w/46,000 lb. tandem rear axle) (Avail. w/truck only and w/walking beam susp. only) (Avail. w/single vert. muffler Codes 32FW00, 32FX00, 32FY00 or 32F000, single transverse muffler w/horiz. outlet Code 32FN00 or single transverse muffler w/vert. outlet Codes 32FP00 or 32FR00 only) (N.A. w/rear mtd. dual 80 gal. rect. fuel tanks)				
40GN00-AC	— 207" wb	210	1315.00		0
40GN00-AA	— 213" wb	213	1315.00		0
40GN00-AB	— 225" wb	220	1439.00		0
40GN00-AG	— 237" wb	N/A	1439.00		0
	Double Channel (N.A. w/5th wheel options, 60" front springs or HAS-400, HAS-40L.H. or any HFS susp.) 27.0 SM, 120,000 PSI (Straight Rail Reinforced)				
40FC00-AX	— 177" wb	637	907.00		0
40FC00-AY	— 189" wb	672	1107.00		0
40FC00-A0	— 207" wb	759	1107.00		0
40FC00-A1	— 213" wb	777	1107.00		0
40FC00-A2	— 225" wb	812	1211.00		0
40FC00-A3	— 237" wb	891	1211.00		0
40FC00-A4	— 243" wb	908	1211.00		0
40FC00-A5	— 249" wb	961	1211.00		0
40FC00-A6	— 261" wb	1031	1211.00		0
	Double Channel (N.A. w/5th wheel options, 60" front springs or HAS-400, HAS-40L.H. or any HFS susp.) 30.0 SM, 120,000 PSI (Straight Rail Reinforced)				
40FD00-AX	— 177" wb	756	1108.00		0
40FD00-AY	— 189" wb	798	1352.00		0
40FD00-A0	— 207" wb	902	1352.00		0
40FD00-A1	— 213" wb	923	1352.00		0
40FD00-A2	— 225" wb	965	1479.00		0
40FD00-A3	— 237" wb	1060	1479.00		0
40FD00-A4	— 243" wb	1081	1479.00		0
40FD00-A5	— 249" wb	1144	1479.00		0
40FD00-A6	— 261" wb	1227	1479.00		0

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	FRAME MODIFICATIONS				
40GB00-AA	Extended Frame, Front, Integral (24" from front of bumper to face of grille) (Req. crankshaft-driven PTO; Incl. radiator mounted (fixed) grille and full width swept back steel bumper painted Med. Titanium; N.A. w/bumper extension Code 59HC00, driving lights Code 27G800 or fog lights Code 27G700; N.A. w/60" front susp.) (N.A. as 249" or 261" wb tandem axle tractor)	16	327.00	0	0
40GB00-AC	— Avail. w/ 15.9 SM, 120,000 PSI, Frame only (All bolted assy.)	N/A	327.00		0
40GB00-AM	— Avail. w/ 20.5 SM, 120,000 PSI, Frame only	64	327.00		0
40GB00-AE	— Avail. w/ 26.0 SM, 120,000 PSI, Frame only	N/A	327.00		0
40GB00-AG	— Avail. w/ 27.0 SM, 120,000 PSI, Frame only	N/A	327.00		0
40EX00-AA	Frame Crossmembers Tractor Ramp Rear Crossmember, Full Width, Steel (Incl. crossmember mtd. taillights in lieu of standard; Avail. w/on-hwy tractor only) (Also N.A. w/square cut frame ends Code 40EN00, TruckLite rear lighting Code 27AAR0, reinforced frame or Neway rear susp.)	45	79.00	0	0
40EN00-AA	Frame End, Rear Square Cut (Avail. w/tractor only; Incl. w/truck)	9	NC	0	0
40EM00-AA	Tapered End Caps, Bolt-on (Avail. w/tractor only; N.A. w/outside frame rail mounted taillights Code 275600 or reinforced frame) (N.A. w/square cut frame ends Code 40EN00 or tractor ramp rear crossmember Code 40EX00)	12	85.00	0	0
40EL00	Huck Fasteners, Frame (Rear cab support, intermediate and rear suspension crossmembers) (Standard)	—	—	S	S
40G400-AA	Huck Fasteners, Frame — Delete (All Bolted Frame)	-19	NC	0	0
43 — FUEL TANKS (Refer to the Fuel Tank-Battery Box- Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions)					
Rectangular Tanks, Steel — Shallow					
43PA00-AA	45 gal. (CLEAN CA) — Single R.H. (Avail. only w/L.H. under cab battery box)	-26	NC	0	0
43N900-AA	— Single L.H. (Req. R.H. under cab battery box Code 29LG00 or 29LJ00)	-26	CR 73.00	0	0
43L700	55 gal. — Single R.H. (Standard)	—	—	S	S
43L800-AA	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank)	0	NC	0	0
43L900-AA	— Dual (Incl. single draw/single return fuel lines with crossover exc. w/19.5" wheels) (Req. dual draw/dual return w/19.5" wheels) (Req. opt. battery box location in comb. w/forward mtd. fuel tank)	196	465.00	0	0
43MB00-AA	80 gal. — Single R.H.	54	240.00	0	0
43MA00-AA	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank)	54	240.00	0	0
43MC00-AA	— Dual (Incl. single draw/single return fuel lines with crossover exc. w/19.5" wheels) (Req. dual draw/dual return w/19.5" wheels) (Req. opt. battery box location in comb. w/forward mtd. fuel tank)	309	843.00	0	0
Rectangular Tanks, Dual Mixed Capacity, Steel — Shallow (L.H. tank rear mtd. w/R.H. tank fwd. mtd.) (Incl. single draw/single return fuel lines with crossover) (N.A. w/19.5" wheels)					
43MD00-AA	30 gal. L.H., 55 gal. R.H.	168	371.00	0	0
43ME00-AA	55 gal. L.H., 80 gal. R.H.	251	659.00	0	0

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	43 — FUEL TANKS (Refer to the Fuel Tank-Battery Box- Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions) (Continued)				
	Rectangular Tanks, Steel — Deep (N.A. w/19.5" wheels)				
	50 gal.				
43MX00-AD	— Single R.H. (N.A. forward mounted)	17	NC	0	0
43MW00-AA	— Single L.H. (N.A. forward mounted)	17	NC	0	0
43MY00-AA	— Dual (Incl. single draw/single return fuel lines with crossover) (N.A. forward mounted)	236	465.00	0	0
	60 gal. (CLEAN CA)				
43PE00-AA	— Single R.H. (Avail. only w/L.H. under cab battery box)	21	96.00	0	0
43PD00-AA	— Single L.H. (Req. R.H. under cab battery box Code 29LG00 or 29LJ00)	21	96.00	0	0
	75 gal.				
43M100-AA	— Single R.H.	50	240.00	0	0
43M000-AA	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank)	50	240.00	0	0
43M200-AA	— Dual (Incl. single draw/single return fuel lines with crossover) (Req. opt. battery box location in comb. w/forward mtd. fuel tank)	301	843.00	0	0
	100 gal.				
43M400-AA	— Single R.H.	131	279.00	0	0
43N000-AA	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank)	131	279.00	0	0
43M500-AA	— Dual (Incl. single draw/single return fuel lines with crossover) (Req. opt. battery box location in comb. w/forward mtd. fuel tank)	451	1020.00	0	0
	Rectangular Tanks, Dual Mixed Capacity, Steel — Deep (L.H. tank rear mtd. — R.H. tank fwd. mtd.) (Incl. single draw/single return fuel lines with crossover) (N.A. w/19.5" wheels)				
43M600-AA	50 gal. L.H., 75 gal. R.H.	268	675.00	0	0
43M700-AA	75 gal. L.H., 100 gal. R.H.	377	955.00	0	0
	44 — FUEL TANK EQUIPMENT				
	Fuel Tank Mounting Location				
STD.	Forward Mounted Fuel Tank (Max Location) (Standard) (Refer to the Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions)	—	—	S	S
44HM00-AA	Rear Mounted Fuel Tank (N.A. w/CLEAN CA fuel tanks) (N.A. w/mixed fuel tanks) (Refer to the Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions)	0	79.00	0	0
	Fuel Tank Mounting Supports				
STD.	— Standard-Weight Tank Supports (Standard)	—	—	S	S
44HW00-AW	Fuel Lines — Dual Draw/Dual Return Without Under Tank Crossover (Avail. w/equal capacity dual fuel tanks only) (N.A. w/AT auto. trans.) (N.A. w/instr. pnl. mtd. pushbutton control for Allison electronic trans. Code 57C400 in comb. w/any horiz. muffler system)	3	19.00	0	0
	Steps				
STD.	Cab Length, Fuel Tank Mounted (Standard)	—	—	S	S

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	46 — SUSPENSION, FRONT <i>(Optimum ride and handling qualities are obtained with matched suspension. Mixed taper-leaf and multi-leaf suspensions on a vehicle is not available. See Component Book for details)</i>				
46CN00-AA	Suspension, Front, Multi-Leaf, 54" Spread (N.A. w/taper-leaf rear susp.) 7,000 lb. Cap. for 7,000 lb. Front Axle Code 10AB00 (Incl. w/axle) (Avail. w/ 14,000 lb., 15,000 lb. and 17,500 lb. rear suspension only) (1)	0	NC	0	
46CP00-AA	8,500 lb. Cap. for 9,000 lb. Front Axle Code 10AC00 (Avail. w/truck only)	-13	CR 25.00	0	0
46CR00-AB	9,000 lb. Cap. for 9,000 lb. Front Axle Code 10AC00 (Incl. w/axle) (2)	0	NC	0	0
46CR00-AC	9,000 lb. Cap. for 10,000 lb. Front Axle Code 10AG00 (Avail. w/truck only)	6	CR 25.00	0	0
46CT00-AE	10,000 lb. Cap. for 9,000 lb. Front Axle Code 10AC00 (N.A. w/Cat. 3126 eng.)	-6	25.00	0	0
46CT00	10,000 lb. Cap. for 10,000 lb. Front Axle Code 10AG00 (Incl. w/axle) (Standard) ..	—	—	S	S
46CT00-AC	10,000 lb. Cap. for 12,000 lb. Front Axle Code 10AE00	-20	CR 25.00	0	0
46CV00-AA	12,000 lb. Cap. for 10,000 lb. Front Axle Code 10AG00	20	25.00	0	0
46CV00-AC	12,000 lb. Cap. for 12,000 lb. Front Axle Code 10AE00 (Incl. w/axle)	0	NC	0	0
46CV00-AE	12,000 lb. Cap. for 13,000 lb. Front Axle Code 10AM00	-15	CR 25.00	0	0
46CW00-AA	13,200 lb. Cap. for 12,000 lb. Front Axle Code 10AE00	15	25.00	0	0
46CW00-AC	13,200 lb. Cap. for 13,000 lb. Front Axle Code 10AM00 (Incl. w/axle)	0	NC	0	0
46CW00-AE	13,200 lb. Cap. for 14,600 lb. Front Axle Code 10A200	-48	CR 25.00	0	0
46CX00-AA	14,600 lb. Cap. for 13,000 lb. Front Axle Code 10AM00	48	25.00	0	0
46CX00-AC	14,600 lb. Cap. for 14,600 lb. Front Axle Code 10A200 (Incl. w/axle)	0	NC	0	0
46CX00-AE	14,600 lb. Cap. for 16,000 lb. Front Axle Code 10AF00	-36	CR 25.00	0	0
46CY00-AA	16,000 lb. Cap. for 14,600 lb. Front Axle Code 10A200	36	25.00	0	0
46CY00-AC	16,000 lb. Cap. for 16,000 lb. Front Axle Code 10AF00 (Incl. w/axle)	0	NC	0	0
46C000-AA	18,000 lb. Cap. for 16,000 lb. Front Axle Code 10AF00	5	25.00	0	0
46C000-AB	18,000 lb. Cap. for 18,000 lb. Front Axle Code 10AD00 (Incl. w/axle)	0	NC		0
46C000-AC	18,000 lb. Cap. for 20,000 lb. Front Axle Code 10AH00	-19	CR 25.00		0
46C100-AA	20,000 lb. Cap. for 18,000 lb. Front Axle Code 10AD00	19	25.00		0
46C100-AB	20,000 lb. Cap. for 20,000 lb. Front Axle Code 10AH00	0	NC		0
	Suspension, Front, Taper-Leaf, 54" Spread (Incl. front shock absorbers) (N.A. w/multi- leaf rear susp.)				
46C300-AA	8,500 lb. Cap. for 9,000 lb. Front Axle Code 10AC00 (Avail. w/truck only)	-40	CR 25.00	0	0
46C400-AA	9,000 lb. Cap. for 9,000 lb. Front Axle Code 10AC00 (Avail. w/truck only)	-25	NC	0	0
46C500-AB	10,000 lb. Cap. for 10,000 lb. Front Axle Code 10AG00 (N.A. for severe duty)	-23	149.00	0	0
46C600-AA	12,000 lb. Cap. for 10,000 lb. Front Axle Code 10AG00 (N.A. for severe duty)	-15	175.00	0	0
46C600-AB	12,000 lb. Cap. for 12,000 lb. Front Axle Code 10AE00 (N.A. for severe duty)	-35	149.00	0	0
46C700-AF	12,000 lb. Cap. for 12,000 lb. Front Axle Code 10AE00 (w/premium bushings) (Avail. w/on-hwy tractor only).....	N/A	363.00	0	0
46C800-AA	13,200 lb. Cap. for 13,000 lb. Front Axle Code 10AM00 (N.A. w/severe duty)	-24	149.00	0	0
46C800-AD	13,200 lb. Cap. for 14,600 lb. Front Axle Code 10A200 (Avail. w/truck or on-off hwy. tractor) (N.A. w/severe duty).....	-72	125.00	0	0
46C900-AA	14,600 lb. Cap. for 13,000 lb. Front Axle Code 10AM00 (Avail. w/truck or on-off hwy. tractor) (N.A. w/severe duty).....	-10	175.00	0	0
46C900-AB	14,600 lb. Cap. for 14,600 lb. Front Axle Code 10A200 (N.A. w/severe duty)	-58	149.00	0	0

- (1) Includes rear shock absorbers when used w/rear suspensions 14,000 lb. (Code 47LR00), 15,000 lb. (Code 47AA00) or 17,500 lb. (Code 47J500).
 (2) Includes rear shock absorbers when used w/15,000 lb. rear suspension (Code 47AA00).

NOTE: All capacity ratings shown represent on-highway application.

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	47 — SUSPENSION, REAR, SINGLE AXLE (All susp. hts. listed are for empty condition) (Optimum ride and handling qualities are obtained with matched suspension. Mixed taper-leaf and multi-leaf suspensions on a vehicle is not available. See Component Book for details)				
47LR00-AA	Suspension, Rear, Multi-Leaf (N.A. w/taper-leaf front susp.) 14,000 lb. Cap. for 17,500 lb. Rear Axle (Req. 7,000 lb. Front Axle) (Avail. w/truck only) (Includes rear shock absorbers).....	-106	NC	0	
47AA00-AM	15,000 lb. Cap. for 17,500 lb. Rear Axle (Avail. w/truck only) (Available w/7000 lb. or 9000 lb. Front Axle only. Includes rear shock absorbers)	-106	NC	0	
47J500-AB	17,500 lb. Cap. for 17,500 lb. Rear Axle (Susp. ht. 10.65") (Includes rear shock absorbers when 7000 lb. Front Axle is specified)	-38	NC	0	
47J500-AA	17,500 lb. Cap. for 19,000 lb. Rear Axle (Susp. ht. 10.65")	-38	CR 28.00	0	
47J600-AC	19,000 lb. Cap. for 17,500 lb. Rear Axle (Susp. ht. 10.75")	0	28.00	0	
47J600-AA	19,000 lb. Cap. for 19,000 lb. Rear Axle (Susp. ht. 10.75")	0	NC	0	
47J600-AB	19,000 lb. Cap. for 21,000 lb. Rear Axle (Susp. ht. 10.75")	0	CR 28.00	0	
47J700-AA	21,000 lb. Cap. for 19,000 lb. Rear Axle (Normal Ride) (46") (Susp. ht. 10.88" w/under 12,000 lb. F.A.; Susp. ht. 11.88" w/12,000 lb. or higher F.A.).....	0	28.00	0	
47J700	21,000 lb. Cap. for 21,000 lb. Rear Axle (Normal Ride) (46") (Susp. ht. 10.88" w/under 12,000 lb. F.A.; Susp. ht. 11.88" w/12,000 lb. or higher F.A.) (Standard)	—	—	S	
47LS00-AA	21,000 lb. Cap. for 21,000 lb. Rear Axle (Soft Ride) (52") (Susp. ht. 9.18" w/under 12,000 lb. F.A.; Susp. ht. 10.18" w/12,000 lb. or higher F.A.) (Avail. w/on-hwy. tractor only)	-13	93.00	0	
47J700-AB	21,000 lb. Cap. for 23,000 lb. Rear Axle (Normal Ride) (46") (Susp. ht. 10.88" w/under 12,000 lb. F.A.; Susp. ht. 11.88" w/12,000 lb. or higher F.A.).....	0	CR 28.00	0	
47LS00-AC	21,000 lb. Cap. for 23,000 lb. Rear Axle (Soft Ride) (52") (Susp. ht. 9.18" w/under 12,000 lb. F.A.; Susp. ht. 10.18" w/12,000 lb. or higher F.A.) (Avail. w/on-hwy. tractor only)	-13	65.00	0	
47KA00-AA	23,000 lb. Cap. for 21,000 lb. Rear Axle (46") (Susp. ht. 11.28" w/under 12,000 lb. F.A.; Susp. ht. 12.28" w/12,000 lb. or higher F.A.) (Avail. truck only).....	4	28.00	0	
47KA00-AB	23,000 lb. Cap. for 23,000 lb. Rear Axle (46") (Susp. ht. 11.28" w/under 12,000 lb. F.A.; Susp. ht. 12.28" w/12,000 lb. or higher F.A.) (Avail. truck only).....	4	NC	0	
47J900-AA	24,500 lb. Cap. for 23,000 lb. Rear Axle (Avail. for truck only) (Susp. ht. 12.00") ...	61	28.00	0	
	Suspension, Rear, Taper-Leaf (Avail. for on-hwy. tractor applications only; Incl. rear shock absorbers) (N.A. w/multi-leaf front susp.)				
47J100-AA	17,500 lb. Cap. for 17,500 lb. Rear Axle (Susp. ht. 9.50")	-62	61.00	0	
47JN00-AB	19,000 lb. Cap. for 17,500 lb. Rear Axle (Susp. ht. 9.50")	-52	89.00	0	
47JN00-AA	19,000 lb. Cap. for 19,000 lb. Rear Axle (Susp. ht. 9.45")	-52	61.00	0	
47JP00-AB	21,000 lb. Cap. for 19,000 lb. Rear Axle (Normal Ride) (46") (Susp. ht. 9.72" w/under 12,000 lb. F.A.; Susp. ht. 10.72" w/12,000 lb. or higher F.A.).....	-48	89.00	0	
47JP00-AA	21,000 lb. Cap. for 21,000 lb. Rear Axle (Normal Ride) (46") (Susp. ht. 9.72" w/under 12,000 lb. F.A.; Susp. ht. 10.72" w/12,000 lb. or higher F.A.).....	-48	61.00	0	
47JP00-AC	21,000 lb. Cap. for 23,000 lb. Rear Axle (Normal Ride) (46") (Susp. ht. 9.72" w/under 12,000 lb. F.A.; Susp. ht. 10.72" w/12,000 lb. or higher F.A.).....	-48	33.00	0	
47LT00-AD	21,000 lb. Cap. for 21,000 lb. Rear Axle (Soft Ride) (52") (Susp. ht. 9.02" w/under 12,000 lb. F.A.; Susp. ht. 10.02" w/12,000 lb. or higher F.A.)	4	155.00	0	
47LT00-AA	21,000 lb. Cap. for 23,000 lb. Rear Axle (Soft Ride) (52") (Susp. ht. 9.02" w/under 12,000 lb. F.A.; Susp. ht. 10.02" w/12,000 lb. or higher F.A.)	4	127.00	0	

NOTE: All capacity ratings shown represent on-highway application.

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	47 — SUSPENSION, REAR, SINGLE AXLE (All susp. hts. listed are for empty condition) (Optimum ride and handling qualities are obtained with matched suspension. Mixed taper-leaf and multi-leaf suspensions on a vehicle is not available. See Component Book for details) (Continued)				
47JM00-AC	Suspension, Rear, Air 19,000 lb. Cap., Hendrickson Air, HAS-190 for 17,500 or 19,000 lb. Rear Axle (Avail. for on-hwy. tractor only; Incl. I/P mtd. air susp. dump valve) (N.A. for severe duty) (Susp. ht. 8.50")	-48	1277.00	0	
47LW00-AA	21,000 lb. Cap. AirLiner Air Susp., w/ inner wheel chain clearance (1) (Incl. transverse control rods; brake camshaft support brackets & two shock absorbers) (Susp. ht. 8.50") (N.A. w/2-speed rear axles) — Avail. w/ on-hwy. truck only	N/A	549.00	0	
47LW00-AD	— Avail. w/ on-hwy. tractor (Incl. I/P mtd. air susp. dump valve)	N/A	652.00	0	
47KE00-AA	21,000 lb. Cap., Hendrickson Air, HAS-210 for 21,000 lb. Rear Axle (N.A. for severe duty) (Susp. ht. 8.50") — Avail. w/ truck only	-82	1115.00	0	
47KE00-AE	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve)	-18	1277.00	0	
47LX00-AA	23,000 lb. Cap. AirLiner Air Susp., w/ inner wheel chain clearance (1) (Incl. transverse control rods; brake camshaft support brackets & two shock absorbers) (Susp. ht. 10.00") (N.A. w/2-speed rear axles) — Avail. w/ truck only	N/A	1129.00	0	
47LX00-AD	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve Code 48AC00)	N/A	1232.00	0	
47KF00-AA	23,000 lb. Cap., Hendrickson Air, HAS-230 for 23,000 lb. Rear Axle (N.A. for severe duty) (Susp. ht. 8.50") — Avail. w/ truck only	-65	1115.00	0	
47KF00-AF	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve)	-1	1277.00	0	
47KG00-AA	23,000 lb. Cap. Neway Air, AD-123 (Avail. w/RS-23-161 23,000 lb. Rear Axle only) (N.A. w/fifth wheel) (N.A. for severe duty) (Susp. ht. 8.75") — Avail. w/ truck only	45	1831.00	0	
47KG00-AF	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve Code 48AC00 & square cut frame ends Code 40EN00)	106	1992.00	0	
47KH00	Suspension, Rear, Auxiliary (Recommended for use w/high center-of-gravity loads and/or off-hwy. operations) Single Leaf (Standard w/ truck only)	—	—	S	
47KH00-AC	Single Leaf (Available w/tractor only) (N.A. w/air ride suspensions)	61	72.00	0	
47KJ00-AA	Multi-Leaf (N.A. w/soft ride or air ride suspensions) — Avail. w/ truck only	44	105.00	0	
47KJ00-AH	— Avail. w/ tractor only	NO CODE	MATCH FOUND	0	
	47 — SUSPENSION, REAR, TANDEM (All susp. hts. listed are for empty condition)				
47AW00	SUSPENSION, REAR FOR 34,000 LB. AXLES 34,000 lb. Cap. Hendrickson Steel Walking Beam — 52" Axle Spacing U2-340 (Susp. ht. 10.30") (Standard)	—	—		S
47AX00-AT	UE2-340 (N.A. w/reinforced frames) (Susp. ht. 11.23")	117	93.00	0	
47KL00-AA	36,000 lb. Cap. Hendrickson 4-Spring — 52" Axle Spacing HFS-40LH (Avail. w/on-hwy. tractor only; 12,000 lb. max. Front Axle; 80,000 lbs. max. GCWR; N.A. for lift axle applications) (Susp. ht. 10.00")	-206	CR 863.00	0	
47KM00-AH	40,000 lb. Cap. Hendrickson Air — 52" Axle Spacing HAS-40LH w/ Transverse Torque Rods (Avail. w/on-hwy. tractor only) (Incl. I/P mtd. air susp. dump valve) (12,000 lb. max. Front Axle; 80,000 lbs. max. GCWR; N.A. for lift axle applications, reinforced frame or MD-Series trans.) (Susp. ht. 8.50")	-134	387.00	0	

(1) Refer to Appendix for Suspension Applications.

NOTE: All capacity ratings shown represent on-highway application.

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	47 — SUSPENSION, REAR, TANDEM (All susp. hts. listed are for empty condition)				
	SUSPENSION, REAR FOR 40,000 LB. AXLES				
	34,000 lb. Cap. Hendrickson Steel Walking Beam — 52" Axle Spacing				
47AW00-AX	U2-340 (Susp. ht. 10.30")	0	NC		0
47AX00-A3	UE2-340 (N.A. w/reinforced frames) (Susp. ht. 11.23")	117	93.00		0
	36,000 lb. Cap. Hendrickson 4-Spring — 52" Axle Spacing				
47KL00-AB	HFS-40LH (Avail. w/on-hwy. tractor only) (12,000 lb. max. Front Axle; 80,000 lbs. max. GCWR; N.A. for lift axle applications or reinforced frame) (Susp. ht. 10.00")	-206	CR 863.00		0
47K900-AA	HFS-400 (Avail. w/on-hwy. truck only; 14,600 lb. max. front axle; N.A. w/reinforced frame) (Susp. ht. 10.11")	-153	CR 795.00		0
	40,000 lb. Cap. AirLiner Extra Duty Air Susp. — 51" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember, heavy duty axle housing & restrained axle seats) (Susp. ht. 8.50") (Avail. w/14,600 lb. max. front axle; max. 40,000 lb. rear axle) (Avail. only w/13.3 SM and 15.9 SM frame) (Refer to the frame chart for GVWR & WB restrictions)				
47L000-AA	— Avail. w/ on-hwy. truck only	N/A	CR 359.00		0
47L000-AD	— Avail. w/ on-hwy. tractor (Incl. I/P mtd. air susp. dump valve)	N/A	CR 256.00		0
	40,000 lb. Cap. Hendrickson Steel Walking Beam — 52" Axle Spacing				
47AY00-AT	RT2-400 w/ Rubber Center Bushings (Susp. ht. 11.15")	248	501.00		0
47A000-AT	RT2-400 w/ Bronze Center Bushings (Susp. ht. 11.15")	249	693.00		0
47A100-AL	RT2-400 w/ Transverse Torque Rods & Rubber Center Bushings (Susp. ht. 11.15")	315	908.00		0
47A300-AT	RTE2-400 w/ Rubber Center Bushings (N.A. w/reinforced frames) (Susp. ht. 11.17")	299	633.00		0
47A400-AT	RTE2-400 w/ Bronze Center Bushings (N.A. w/reinforced frames) (Susp. ht. 11.17")	310	825.00		0
47A500-AL	RTE2-400 w/ Transverse Torque Rods and Rubber Center Bushings (N.A. w/reinforced frames) (Susp. ht. 11.17")	368	1109.00		0
47A700-AK	RS-400 w/ Rubber Center Bushings (Rubber sprung) (Avail. for truck only) (Susp. ht. 10.52")	40	1925.00		0
	40,000 lb. Cap. Hendrickson 4-Spring — 52" Axle Spacing				
	HFS-400				
47KN00-AG	— Avail. w/ on-hwy. tractor only (14,600 lb. max. Front Axle; N.A. w/reinforced frame) (Susp. ht. 10.11")	-153	CR 796.00		0
	40,000 lb. Cap. Hendrickson Air — 52" Axle Spacing				
	HAS-40LH w/ Transverse Torque Rods (12,000 lb. max. Front Axle; 80,000 lb. max. GCWR; N.A. for lift axle applications, reinforced frame or MD-Series trans.)				
47KM00-AK	— Avail. w/ on-hwy. tractor only (Incl. I/P mtd. air susp. dump valve) (Susp. ht. 8.50")	-81	387.00		0
	HAS-400 w/ Transverse Torque Rods (14,600 lb. max. Front Axle; 55,000 lb. max. GVWR; 120,000 lb. max. GCWR; N.A. for lift axle applications, reinforced frame or MD-Series trans.) (Susp. ht. 8.50")				
47KP00-AA	— Avail. w/ on-hwy. truck only	-27	359.00		0
47KP00-AB	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve)	-24	521.00		0
	HAS-402 w/ Transverse Torque Rods (Avail. w/16-, 18- or 20,000 lb. Front Axle; Max. 66,000 lb. GVW; Max. 55,000 lb. GVW w/tag or pusher axle in the raised position) (N.A. w/20.5 SM "Inverted-L" reinforced frame, 20.25 SM extended frame or MD-Series trans.) (N.A. for severe duty) (Susp. ht. 8.50")				
47KR00-AA	— Avail. w/ truck only (Approved for single lift axle truck applications) (Site travel rating for tandem axle not to exceed 50,000 lb. on rear susp.)	-13	328.00		0
47KR00-AG	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve)	-10	491.00		0

(1) Refer to Appendix for Suspension Applications.

NOTE: All capacity ratings shown represent on-highway application.

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	47 — SUSPENSION, REAR, TANDEM (All susp. hts. listed are for empty condition) (Continued)				
	SUSPENSION, REAR FOR 40,000 LB. AXLES (Continued)				
	40,000 lb. Cap. AirLiner Extra Duty Air Susp. w/inner wheel chain clearance — 55" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember) (Includes heavy duty axle housing & restrained axle seats) (Susp. ht. 8.50") (Avail. w/14,600 lb. max. front axle; max. 40,000 lb. rear axle) (Avail. only w/13.3 SM and 15.9 SM frame) (Refer to the frame chart for GVWR & WB restrictions)				
47L300-AA	— Avail. w/on-hwy. truck only	N/A	CR 55.00		0
47L300-AD	— Avail. w/on-hwy. tractor (Incl. I/P mtd. air susp. dump valve)	N/A	49.00		0
	40,000 lb. Cap. AirLiner Extra Duty Air Susp. w/inner wheel chain clearance — 59" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember) (Includes heavy duty axle housing & restrained axle seats) (Susp. ht. 8.50") (Avail. w/14,000 lb. max. front axle; max. 40,000 lb. rear axle) (Avail. only w/13.3 SM and 15.9 SM frame) (Refer to the frame chart for GVWR & WB restrictions)				
47L600-AA	— Avail. w/on-hwy. truck only	N/A	CR 55.00		0
47L600-AD	— Avail. w/on-hwy. tractor (Incl. I/P mtd. air susp. dump valve)	N/A	49.00		0
	40,000 lb. Cap. Hendrickson Steel Walking Beam — 60" Axle Spacing				
47BF00-AH	RT2-400 w/ Transverse Torque Rods & Rubber Center Bushings (Susp. ht. 11.13")	405	1293.00		0
47BG00-AH	RTE2-400 w/ Transverse Torque Rods & Rubber Center Bushings (N.A. w/reinforced frames) (Susp. ht. 11.14")	387	1425.00		0
	40,000 lb. Cap. Hendrickson Air — 60" Axle Spacing				
	HAS-400 w/ Transverse Torque Rods (14,600 lb. max. Front Axle; 55,000 lb. max. GVWR; 120,000 lb. max. GCWR; N.A. for lift axle applications, reinforced frame or MD-Series trans.) (Susp. ht. 8.50")				
47KT00-AA	— Avail. w/on-hwy. truck only	-19	1072.00		0
47KT00-AB	— Avail. w/tractor only (Incl. I/P mtd. air susp. dump valve)	-16	1235.00		0
	46,000 lb. Cap. Neway Air — 54" Axle Spacing (Min. 177" wb) (N.A. for severe duty) (Susp. ht. 8.75")				
47KV00-AA	AD-246 w/ Transverse Torque Rods (Avail. w/truck only)	138	2573.00		0
47KV00-AB	AD-246 w/ Transverse Torque Rods (Incl. air suspension dump valve Code 48AC00; Avail. w/tractor only) (Incl. square cut frame ends Code 40EN00)	150	2735.00		0
	46,000 lb. Cap. Neway Air — 60" Axle Spacing (Min. 189" wb) (N.A. for severe duty) (Susp. ht. 8.75")				
47KW00-AA	AD-246 w/ Transverse Torque Rods (Avail. w/truck only)	138	2941.00		0
47KW00-AB	AD-246 w/ Transverse Torque Rods (Incl. air suspension dump valve Code 48AC00; Avail. w/tractor only) (Incl. square cut frame ends Code 40EN00)	150	3103.00		0
	SUSPENSION, REAR FOR 46,000 LB. AXLES				
	46,000 lb. Cap. AirLiner Air Susp. — 51" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember, heavy duty axle housing & welded axle seats) (Susp. ht. 10.0") (Avail. only w/13.3, 15.9, 26.0, 27.0 and 30.0 frames) (N.A. for severe duty) (Refer to the frame chart for GVWR and WB restrictions)				
47L700-AA	— Avail. w/truck only	N/A	151.00		0
47L700-AC	— Avail. w/tractor only (Incl. I/P mtd. air susp. dump valve Code 48AC00)	N/A	253.00		0
	46,000 lb. Cap. AirLiner Air Susp. w/inner wheel chain clearance — 55" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember, heavy duty axle housing & welded axle seats) (Susp. ht. 10.0") (Avail. only w/13.3, 15.9, 26.0, 27.0 and 30.0 frames) (N.A. for severe duty) (Refer to the frame chart for GVWR & WB restrictions.)				
47L800-AA	— Avail. w/truck only	N/A	379.00		0
47L800-AC	— Avail. w/tractor only (Incl. I/P mtd. air susp. dump valve Code 48AC00)	N/A	481.00		0

(1) Refer to Appendix for Suspension Applications.

NOTE: All capacity ratings shown represent on-highway application.

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	47 — SUSPENSION, REAR, TANDEM (All susp. hts. listed are for empty condition) (Continued)				
	SUSPENSION, REAR FOR 46,000 LB. AXLES (Continued)				
47L900-AA	46,000 lb. Cap. AirLiner Air Susp. w/ inner wheel chain clearance — 59" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember, heavy duty axle housing & welded axle seats) (Susp. ht. 10.0") (Avail. only w/13.3, 15.9, 26.0, 27.0 and 30.0 frames) (N.A. for severe duty) (Refer to the frame chart for GVWR & WB restrictions)	N/A	379.00		0
47L900-AC	— Avail. w/ truck only	N/A	481.00		0
47BB00-AL	46,000 lb. Cap. Hendrickson Steel Walking Beams — 54" Axle Spacing RT2-460 w/ Transverse Torque Rods & Rubber Center Bushings (Susp. ht. 11.37")	73	1111.00		0
47BE00-AK	RS-460 w/ Bronze Center Bushings (Rubber sprung) (Avail. for truck only) (Susp. ht. 10.51")	-200	3100.00		0
47BH00-AH	46,000 lb. Cap. Hendrickson Steel Walking Beams — 60" Axle Spacing RT2-460 w/ Transverse Torque Rods & Rubber Center Bushings (Susp. ht. 11.36")	86	1275.00		0
47KV00-AV	46,000 lb. Cap. Neway Air — 54" Axle Spacing (Min. 177" wb) (N.A. for severe duty) (Susp. ht. 8.75")	-246	1224.00		0
47KV00-AO	AD-246 w/ Transverse Torque Rods (Avail. w/truck only)	-234	1387.00		0
	AD-246 w/ Transverse Torque Rods (Incl. air suspension dump valve Code 48AC00; Avail. w/tractor only) (Incl. square cut frame ends Code 40EN00)	-246	1592.00		0
47KW00-A2	46,000 lb. Cap. Neway Air — 60" Axle Spacing (Min. 189" wb) (N.A. for severe duty) (Susp. ht. 8.75")	-234	1755.00		0
47KW00-AX	AD-246 w/ Transverse Torque Rods (Avail. w/truck only)				
	AD-246 w/ Transverse Torque Rods (Incl. air suspension dump valve Code 48AC00; Avail. w/tractor only) (Incl. square cut frame ends Code 40EN00)				
	48 — SUSPENSION EQUIPMENT				
48AC00-AJ	Air Suspension Dump Valve — I/P mounted (In-cab control to release air pressure from air susp.) (Avail. for trucks w/air rear suspension only; Incl. for tractors w/air rear suspension; N.A. w/tandem axle when differential main lockout Code 13AW00 is used in comb. w/air slide fifth wheel or inside/outside air Code 373T00)	3	163.00	0	0
	50/ 51/ 52/ 53/ 54 — TIRES-WHEELS (See Tire-Wheel Prices tab section for order codes, weights and prices; See Tire/Wheel/Axle Availability tab section for usage; see Component Book for other restrictions)				
50ADX0	Tires, Front Two, 255/ 80R 22.5G (14PR) Michelin XZE	—	—	S	
51ADX0	Tires, Rear Four, 255/ 80R 22.5G (14PR) Michelin XZE	—	—	S	
51ADX0	Eight, 255/ 80R 22.5G (14PR) Michelin XZE	—	—		S
52G000	Wheels, Front Two, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted Accuride 28487PW	—	—	S	
53G000	Wheels, Rear Four, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	—	—	S	
53G000	Eight, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	—	—		S

(1) Refer to Appendix for Suspension Applications.

NOTE: All capacity ratings shown represent on-highway application.

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	55 — WHEEL & TIRE EQUIPMENT				
55CY00-AC	Hub Covers, Bright (Incl. Bright Nut Covers) (Req. 10-hole disc wheels) (N.A. w/steel wheels in comb. w/either alum. hubs or high tensile ferrous hubs) (Avail. w/22.5 x 7.50, 22.5 x 8.25 or 24.5 x 8.25 steel wheels only; Avail. w/22.5 x 8.25 or 24.5 x 8.25 alum. wheels only)				
55CZ00-AE	— Front (2)	1	119.00	0	0
55CZ00-AF	— Rear, Single Axle (2)	5	119.00	0	
	— Rear, Tandem Axle (4)	5	172.00		0
55CW00-AC	Nut Covers, Bright, Threaded (Avail. w/10-hole disc wheels only) (N.A. w/steel wheels in comb. w/either alum. hubs or high tensile ferrous hubs) (Avail. w/22.5 x 7.50, 22.5 x 8.25 or 24.5 x 8.25 steel wheels only; Avail. w/22.5 x 8.25 or 24.5 x 8.25 alum. wheels only)				
55CX00-AE	— Front (20)	1	64.00	0	0
55CX00-AF	— Rear, Single Axle (20)	1	64.00	0	
STD.	— Rear, Tandem Axle (40)	2	128.00		0
	Wheels, I.S.O. Steel Disc (Painted "White" — Not Pure White or Diamond White) (Standard)	—	—	S	S
	56 — TRANSMISSIONS				
56MV00-AN	5-Speed Direct Eaton				
56MW00-AN	— FS-4205A (Avail. w/Cum. ISB 175 HP eng. only)	-134	CR 1345.00	0	
56MX00-AL	— FS-4205B (Avail. w/Cum. ISB 175 HP eng. only)	-134	CR 1345.00	0	
56MY00-AM	— FS-5205A (Avail. w/Cum. ISB 175 HP thru 210 HP eng. only) (1)	-112	CR 825.00	0	
56SE00	— FS-5205B (Avail. w/Cum. ISB 175 HP thru 210 HP eng. only) (1)	-112	CR 825.00	0	
56SF00	— FS-6305A (Standard)	—	—	S	S
	— FS-6305B	—	—	0	
56M200-AM	6-Speed Direct Eaton				
56M300-AX	— FS-5306A (Avail. w/Cum. ISB 175 HP thru 210 HP eng. only)	3	636.00	0	
	— FS-6306A	5	1095.00	0	0
56CB00-AY	9-Speed Direct Fuller				
56AW00-AH	— RT-6609A (Incl. cast iron clutch housing)	14	1325.00	0	0
56QJ00-AA	— RT-8608L (Avail. w/Cum. ISC or Cat. 3126 eng. only) (2)	242	2071.00	0	0
	— RT-8709B (Incl. cast iron clutch housing) (Avail. w/Cum. ISC or Cat. 3126 eng. only) (2)	125	1917.00	0	0
56QH00-AA	10-Speed Direct Fuller				
	— RT-8908LL (Incl. cast iron clutch housing) (2)	342	2876.00	0	0
56P200-AB	10-Speed Overdrive Fuller				
	— RTO-11908LL (H-type shift pattern) (2)	343	3779.00	0	0
56D100-AJ	4-Speed Automatic (Incl. floor mtd. shift control, trans. oil cooler and external oil filter) (See Transmission Section of Component Book for max. GVW/GCW) Allison				
56AA00-AY	— AT-542 (For on-hwy. truck appl. only) (Max. GVW of 22,000 lb.) (Avail. w/Cat. 3126 175 HP Code 30Y700 or Cum. ISB-175 HP Code 300B00 or 190 HP Code 300C00 eng. only).....	330	2748.00	0	
56KF00-AE	— AT-545 (For on-hwy. truck appl. only) (Max. GVW of 30,000 lb.) (Avail. w/Cat. 3126 175 HP Code 30Y700, 190 HP Code 30Y800 or Cum. ISB-175 HP Code 300B00, 190 HP Code 300C00 or 210 HP Code 300E00 only).....	200	1664.00	0	
	— AT-545 (For street sweeper appl. only) (Max. GVW of 32,000 lb. w/min. 5.57 single axle ratio or 4.30/6.00 2-Spd. axle ratio) (Avail. w/Cat. 3126 175 HP Code 30Y700, 190 HP Code 30Y800 or Cum. ISB-175 HP Code 300B00, 190 HP Code 300C00 or 210 HP Code 300E00 only)	200	1664.00	0	

(1) Recommended for severe duty applications w/Cum. ISB-175 HP Code 300B00 eng.

(2) Requires rear trans. supt. Code 57BW00 for on-off hwy. or severe duty applications.

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	56 — TRANSMISSIONS (Continued)				
56G400-AE	4-Speed Automatic (Incl. floor mtd. shift control, trans. oil cooler and external oil filter) (See Transmission Section of Component Book for max. GVW/GCW) (Continued) Allison (Continued) — AT-545 (For airport service appl. only) (Max. GVW of 35,000 lb. w/min. 7.17 single axle ratio) (Avail. w/Cat. 3126 175 HP Code 30Y700, 190 HP Code 30Y800 or Cum. ISB-175 HP Code 300B00, 190 HP Code 300C00 or 210 HP Code 300E00 only).....	200	1664.00	0	
56G400-AF	— AT-545 (For airport service appl. only) (Max. GVW of 33,000 lb. w/min. 5.86 single axle ratio) (Avail. w/Cat. 3126 175 HP Code 30Y700, 190 HP Code 30Y800 or Cum. ISB-175 HP Code 300B00, 190 HP Code 300C00 or 210 HP Code 300E00 only).....	330	1664.00	0	
56AF00-BD	4-Speed Automatic (Incl. pedestal mtd. shift control, trans. oil cooler, trans. oil high temp. warning light and external oil filter) (N.A. w/Cat. 3126 250/800 thru 300 HP eng.) (See Transmission Section of Component Book for max. GVW/GCW) Allison — MT-643	220	6969.00	0	0
56AG00-BB	5-Speed Automatic (Incl. pedestal mtd. shift control, trans. oil cooler, trans. oil high temp. warning light, external oil filter and rear trans. support) (N.A. w/Cat. 3126 250/800 thru 300 HP eng.) (See Transmission Section of Component Book for max. GVW/GCW) Allison — MT-653	312	9620.00	0	0
56KJ00-AT	5-Speed Electronic (Incl. "Do Not Shift" light, floor mtd. lever type control console & internal oil filter) (Incl. rear trans. supt. w/Cat. 3126 eng. only) (Incl. alum. flywheel hsg. w/Cum. ISB eng. w/axle ratios 6.14 or lower) (Incl. ductile iron flywheel hsg. w/axle ratios above 6.14)(N.A. w/Cum. ISB-175 HP eng. Code 300B00, or 2-Spd. axle ratios) (N.A. w/Airliner or Hendrickson HAS tandem rear susp.) (Req. I/P mtd. shift control w/driver dual armrests Code 25AADJ) (Incl. extra cooling Code 37AN00 and Kysor on/off fan clutch Code 373600 when used in comb. w/Cat. 3126 250/800 thru 300 HP eng.) (See Transmission Section of Component Book for max. GVW/GCW) Allison — MD3050CR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cat. 3126 275 to 300 HP eng. Codes 30Y400, 30Y500 and 30Y600; and Cum. ISC-285 HP eng. Code 300T00 and 300 HP Code 300U00).....	63	8175.00	0	0
56KK00-AT	— MD3550WR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cat. 3126 275 to 300 HP eng. Codes 30Y400, 30Y500 and 30Y600; and Cum. ISC-250, 275 and 285 HP eng. Codes 300R00, 301K00 and 300T00).....	63	10585.00	0	0
56H400-AV	6-Speed Electronic (Incl. "Do Not Shift" light, floor mtd. lever type control console & internal oil filter) (Incl. rear trans. supt. w/Cat. 3126 eng. only) (Incl. alum. flywheel hsg. w/Cum. ISB eng. w/axle ratios 5.38 or lower) (Incl. ductile iron flywheel hsg. w/axle ratios above 5.38) (N.A. w/Cum. ISB-175 HP eng. Code 300B00 or 2-Spd. axle ratios) (N.A. w/Airliner or Hendrickson HAS tandem rear susp.) (Req. I/P mtd. shift control w/driver dual armrests Code 25AADJ) (Incl. extra cooling Code 37AN00 and Kysor on/off fan clutch Code 373600 when used in comb. w/Cat. 3126 250/800 thru 300 HP eng.) (See Transmission Section of Component Book for max. GVW/GCW) Allison — MD3060CR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cat. 3126 275 to 300 HP eng. Codes 30Y400, 30Y500 and 30Y600; and Cum. ISC-285 HP eng. Code 300T00 and 300 HP 300U00).....	63	8572.00	0	0
56H500-AT	— MD3560WR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cat. 3126 275 to 300 HP eng. Codes 30Y400, 30Y500 and 30Y600; and Cum. ISC-250 275 and 285 HP eng. Codes 300R00, 301K00 and 300T00).....	63	10939.00	0	0
56QC00-AA	— MD3066	63	11619.00	0	0

L-LT7501

01 8822 624 205 INVTPL KRL YKCNUNEN R 21:51 86.31 RM
440 269 5957 PAGE. 003
MAR 18 '98 12:52

** TOTAL PAGE.003 **

5-Speed Electronic (Incl. "Do Not Shift" light, floor mtd. lever type control console & internal oil filter) (Incl. rear trans. supt. w/Cat. 3126 eng. only) (Incl. alum. flywheel hsg. w/Cum. ISB eng. w/axle ratios 6.14 or lower) (Incl. ductile iron flywheel hsg. w/axle ratios above 6.14) (N.A. w/Cum. ISB-175 HP eng. Code 300B00, ~~ISC-285 HP eng. Code 300T00~~ or 2-Spd. axle ratios) (N.A. w/Hendrickson HAS tandem rear susp.) (Req. I/P mtd. shift control w/driver dual armrests Code 25AADJ) (Req. extra cooling Code 37AN00 and Kysor on/off fan clutch Code 373600 when used in comb. w/Cat. 3126 250/800 thru 300 HP eng.) (See Transmission Section of Component Info. Data Book for max. GVW/GCW)
Allison

56KJ00-AT

— MD3050CR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cat. ~~ISC-300 HP eng. Code 300U00~~) 30Y400, 30Y500, 30Y600
3126-275 To 300 HP

56KK00-AT

— MD3550WR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cat. ~~ISC-300 HP eng. Code 300U00~~) 30Y400, 30Y500, 30Y600
3126-275 To 300 HP

6-Speed Electronic (Incl. "Do Not Shift" light, floor mtd. lever type control console & internal oil filter) (Incl. rear trans. supt. w/Cat. 3126 eng. only) (Incl. alum. flywheel hsg. w/Cum. ISB eng. w/axle ratios 5.38 or lower) (Incl. ductile iron flywheel hsg. w/axle ratios above 5.38) (N.A. w/Cum. ISB-175 HP eng. Code 300B00, ~~ISC-285 HP eng. Code 300T00~~ or 2-Spd. axle ratios) (N.A. w/Hendrickson HAS tandem rear susp.) (Req. I/P mtd. shift control w/driver dual armrests Code 25AADJ) (Req. extra cooling Code 37AN00 and Kysor on/off fan clutch Code 373600 when used in comb. w/Cat. 3126 250/800 thru 300 HP eng.) (See Transmission Section of Component Info. Data Book for max. GVW/GCW)
Allison

56H400-AV

— MD3060CR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cum. ~~ISC-300 HP eng. Code 300U00~~) SAME AS 56KJ00

56H500-AT

— MD3560WR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cum. ~~ISC-300 HP eng. Code 300U00~~) SAME AS 56KK00

56QC00-AA

— MD3066

(3126 RESTRICTIONS)

TMH 1/27/98

L-L1/30/

Changes made
to 51AT7501
21AT8511
21AT8513
in SPFC
3-17-98

56KJ00-AT

56KK00-AT

ALSO NAW
300HP
(300U00)

56H400-AV

56H500-AT

56QC00-AA

5-Speed Electronic (Incl. "Do Not Shift" light, floor mtd. lever type control console internal oil filter) (Incl. rear trans. supt. w/Cat. 3126 eng. only) (Incl. alum. flywheel hsg. w/Cum. ISB eng. w/axle ratios 6.14 or lower) (Incl. ductile iron flywheel hsg. w/axle ratios above 6.14) (N.A. w/Cum. ISB-175 HP eng. Code 300B00, ~~ISC-285 HP eng. Code 300T00~~ or 2-Spd. axle ratios) (N.A. w/Hendrickson HAS tandem rear susp.) (Req. I/P mtd. shift control w/driver dual armrests Code 25AADJ) (Req. extra cooling Code 37AN00 and Kysor on/off fan clutch Code 373600 when used in comb. w/Cat. 3126 250/800 thru 300 HP eng.) (See Transmission Section of Component Info. Data Book for max. GVW/GCW)
Allison

— MD3050CR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cum. ISC-300 HP eng. Code 300U00) AND ~~ISC 285HP 300T00~~

— MD3550WR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cum. ISC-~~300 HP~~ 285 HP eng. Code ~~300U00~~ 300T00) AND ~~ISC 275HP 301K00~~

6-Speed Electronic (Incl. "Do Not Shift" light, floor mtd. lever type control console & internal oil filter) (Incl. rear trans. supt. w/Cat. 3126 eng. only) (Incl. alum. flywheel hsg. w/Cum. ISB eng. w/axle ratios 5.38 or lower) (Incl. ductile iron flywheel hsg. w/axle ratios above 5.38) (N.A. w/Cum. ISB-175 HP eng. Code 300B00, ~~ISC-285 HP eng. Code 300T00~~ or 2-Spd. axle ratios) (N.A. w/Hendrickson HAS tandem rear susp.) (Req. I/P mtd. shift control w/driver dual armrests Code 25AADJ) (Req. extra cooling Code 37AN00 and Kysor on/off fan clutch Code 373600 when used in comb. w/Cat. 3126 250/800 thru 300 HP eng.) (See Transmission Section of Component Info. Data Book for max. GVW/GCW)
Allison

— MD3060CR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cum. ISC-300 HP eng. Code 300U00) AND ~~ISC 285HP 300T00~~

— MD3560WR-P (Req. Fire & Emergency Application Code AAAX00 when used w/Cum. ISC-~~300 HP~~ 285 HP eng. Code ~~300U00~~ 300T00) AND ~~ISC 275HP 301K00~~

— MD3066 ~~285~~ 300T00 AND 250HP 300R00 (NOT 300S00)

(301K00) (NOT REQUIRED) AAAX00
PER HAHN
4-22-98
(300S00) (IT IS GOOD)

PER HAHN
4-22-98

(ISC RESTRICTIONS)

KELLY,
YES, IT SHOULD BE IN THE
DATA BOOK. John H. Bonaker 8803/6 TWH 11/17/98
IT IS GOOD

3000 IS A SMOKE PROBLEM, NOT TORQUE
300000 TORQUE



L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	57 — TRANSMISSION EQUIPMENT				
57C400-AA	Control Console, Push Button (For Allison MD Electronic Trans. only) — Instrument Panel Mounted	1	11.00	0	0
57CD00-AR	— Pedestal Mounted (N.A. w/driver seat swivel Code 25AAD0)	0	11.00	0	0
57CE00-AP	ECU, Maximum Feature (Pumper) in lieu of included ECU (For Allison MD Electronic trans. only) (Avail. for Fire Truck Pumper applications only) (Refer to Component Book for complete details)	2	323.00	0	0
57BW00-AC	Support, Rear Transmission (Avail. for on-hwy applications w/RT-8908LL or RTO-11908LL trans.; Also avail. w/Cat. 3126 only for on-hwy. applications w/RT-8608L or RT-8709B trans.) (N.A. w/Cum. ISB engine)	8	60.00	0	0
57BC00-AA	Synthetic Lube — Mobil 50W Transmission, Manual	0	127.00	0	0
	59 — CHASSIS EQUIPMENT				
59HQ00-AA	Bumper, Front — Aluminum. Anodized, Full Width — Flat	-44	171.00	0	0
59AL00-AP	— Steel, Cut-Off, Painted Med. Titanium (N.A. w/19.5" wheels in combination w/auxiliary lights, Codes 27G700 and 27G800)	-39	CR 36.00	0	0
59HR00-AB	— Steel, Full Width — Flat, Chrome Plated	0	365.00	0	0
59HS00	— Flat, Painted Med. Titanium (Standard)	—	—	S	S
59HC00-AA	Bumper Extension, Front — 12" Spacer (N.A. w/extended frame, front tow hooks Code 59AB00, driving lights Code 27G800 or fog lights Code 27G700) (Max. 900 sq. in. cooling module) (N.A. as 261" wb tandem axle tractor)	N/A	83.00	0	0
59AB00-BL	Tow Hooks, Front (N.A. w/extended bumper)	27	103.00	0	0
59AC00-AX	Tow Hooks, Rear (Incl. square cut rear frame ends Code 40EN00) (Avail. w/truck only) (N.A. w/outside frame rail mtd. taillights Code 275600) (Req. min. 58" AF w/mud flaps and single Rear Axle; Req. min. 63" AF w/52" HAS and 51" A/L tandem susp.; Req. min. 75" AF w/60" HAS, 55" and 59" A/L tandem susp. or w/mud flaps on HAS, A/L, HFS and Neway tandem susp.; Req. min. 90" AF w/mud flaps in comb. w/walking beam tandem susp.)	27	103.00	0	0
59AE00-AX	Tow Hooks, Front & Rear (Incl. square cut rear frame ends Code 40EN00) (Avail. w/truck only) (N.A. w/outside frame rail mtd. taillights Code 275600 or extended bumper Code 59HC00) (Req. min. 58" AF w/mud flaps and single Rear Axle; Req. min. 63" AF w/52" HAS and 51" A/L tandem susp.; Req. min. 75" AF w/60" HAS, 55" and 59" A/L tandem susp. or w/mud flaps on HAS, A/L, HFS and Neway tandem susp.; Req. min 90" AF w/mudflaps in comb. w/walking beam tandem susp.)	55	207.00	0	0
	60 — EQUIPMENT OPTIONS				
	Fifth Wheels — Avail. w/ tractor package only. — Avail. w/ 10.76, 13.3, 15.9 SM frames only. — N.A. w/Neway AD-123 single axle air suspension. — Includes outboard mounted angle brackets. — Painted Black only. — L.H. release. — DSO offsets avail. for both stationary and sliding fifth wheels. Additional Restrictions: (Apply only to Fontaine sliders, 36.7" Holland sliders and 24.5" Holland 6.62" height sliders) — w/Forward mounted shallow rect. fuel tank w/ single Rear Axle — N.A. w/ 153" wb w/ 80 gal. fuel tanks — w/Forward mounted deep rect. fuel tank w/ single Rear Axle — N.A. w/ 153" wb w/ 75 gal. R.H. or dual fuel tank w/ between rail batteries — N.A. w/ 153" wb w/ 100 gal. R.H. or dual fuel tank w/ aft of cab or between rail batteries — N.A. w/ 165" wb w/ 100 gal. dual fuel tanks w/ aft of cab battery box				

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	60 — EQUIPMENT OPTIONS (Continued)				
	Additional Restrictions: (Apply only to Fontaine sliders, 36.7" Holland sliders and 24.5" Holland 6.62" height sliders) (Continued)				
	— w/Forward mounted deep rect. fuel tank w/tandem Rear Axle				
	— N.A. w/153" wb w/75 gal. dual fuel tank w/aft of cab battery box w/HFS or 52" HAS tandem suspensions				
	Air Slide Fifth Wheels: (Incl. in-cab control) (N.A. w/tandem axle when differential main lockout Code 13AW00 is used in comb. w/air susp. dump valve Code 48AC00)				
	— Fontaine Standard Duty, 24" Air Slide (On-hwy. only)				
60CP00-AA	— 6.75" Height	536	1715.00	0	0
60CR00-AA	— 7.75" Height	542	1715.00	0	0
60CT00-AA	— 8.75" Height	548	1759.00	0	0
	— Fontaine Heavy Duty, 24" Air Slide				
60WL00-AA	— 6.75" Height	536	1828.00	0	0
60WM00-AA	— 7.75" Height	542	1828.00	0	0
60WN00-AA	— 8.75" Height	548	1872.00	0	0
	— Holland 3500, 24.5" Air Slide				
60AGM0-AA	— 6.62" Height (N.A. w/54" Neway tandem susp.)	529	1823.00	0	0
60AGN0-AA	— 7.62" Height	479	1823.00	0	0
60AGP0-AA	— 8.62" Height	484	1867.00	0	0
	— Holland 3500, 36.75" Air Slide (N.A. w/Neway tandem susp.)				
60AGW0-AA	— 7.62" Height	588	1823.00	0	0
60AGX0-AA	— 8.62" Height	593	1867.00	0	0
	— Holland Fleetmaster, 24.5" Air Slide (On-hwy. only)				
60ST00-AA	— 6.62" Height (N.A. w/54" Neway tandem susp.)	529	1823.00	0	0
60PQ00-AA	— 7.62" Height	479	1823.00	0	0
60AGT0-AA	— 8.62" Height	484	1867.00	0	0
	— Holland Fleetmaster, 36.75" Air Slide (On-hwy. only) (N.A. w/Neway tandem susp.)				
60AGU0-AA	— 7.62" Height	512	1823.00	0	0
60AGV0-AA	— 8.62" Height	517	1867.00	0	0
	Manual Slide Fifth Wheels				
	— Fontaine Standard Duty, 24" Manual Slide (On-hwy. only)				
60AGY0-AA	— 6.75" Height	532	1644.00	0	0
60CX00-AA	— 7.75" Height	538	1644.00	0	0
60CY00-AA	— 8.75" Height	544	1687.00	0	0
	— Holland 3500, 24.5" Manual Slide				
60AG20-AA	— 6.62" Height (N.A. w/54" Neway tandem susp.)	521	1781.00	0	0
60AG30-AA	— 7.62" Height	483	1781.00	0	0
60AG40-AA	— 8.62" Height	488	1827.00	0	0
	— Holland Fleetmaster, 24.5" Manual Slide (On-hwy. only)				
60FU00-AA	— 6.62" Height (N.A. w/54" Neway tandem susp.)	521	1781.00	0	0
609Q00-AA	— 7.62" Height	483	1781.00	0	0
60AG10-AA	— 8.62" Height	488	1827.00	0	0
	Stationary Fifth Wheels				
	— Stationary Fifth Wheel offsets are 6" ahead of Rear Axle centerline.				
	— Holland 3500, Stationary				
60AGJ0-AA	— 6.62" Height	368	1213.00	0	0
60AGK0-AA	— 7.62" Height	373	1213.00	0	0
60AGL0-AA	— 8.62" Height	378	1263.00	0	0
	— Holland Fleetmaster, Stationary (On-hwy. only)				
60AGQ0-AA	— 6.62" Height	304	1213.00	0	0
60AGR0-AA	— 7.62" Height	310	1213.00	0	0
60AGS0-AA	— 8.62" Height	308	1263.00	0	0

L / LT7501 — 101" BBC

MID-RANGE DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	60 — EQUIPMENT OPTIONS (Continued)				
60AHM0-AA	Mud Flaps, Front (N.A. w/19.5" wheels)	5	63.00	0	0
	Mud Flaps, Rear (Req. min. 75" AF w/rear tow hook Code 59AC00) (N.A. w/19.5" wheels)				
60AAM0-AE	Fleetliner, Black Rubber (Incl. tapered brackets)				
	— Avail. w/truck only	36	215.00	0	0
60AAM0-AF	— Avail. w/tractor only	18	133.00	0	0
	Fleetliner, White Rubber (Incl. stainless brackets)				
60AAN0-AE	— Avail. w/truck only	28	295.00	0	0
60AAN0-AF	— Avail. w/tractor only	10	213.00	0	0
	Quarter Fenders (Avail. for tractor only) (N.A. w/148" wb. in comb. w/tandem axle) (N.A. 153" Wb in comb. w/60" walking beam susp.) (Refer to Quarter Fender Restriction Charts in the Appendix at the end of this model for additional wheelbase restrictions)				
60AAK0-AA	Fleetliner, Black Ultra Rubber	24	196.00	0	0
60AAL0-AA	Fleetliner, Stainless Steel	32	295.00	0	0
	62 — MISCELLANEOUS OPTIONS				
62AF00-BT	Puerto Rico Delivery (Avail. for export only)	0	NC	0	0

101" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT7501 Mid-Range Diesel (4x2 & 6x4)
FORWARD MTD. FUEL TANK

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX
					LH (29KE00 Standard Weight (29KD00) Light Weight	RH (29LG00 Standard Weight (29LJ00) Light Weight	LH (29KF00)
SHALLOW RECTANGULAR							
45 gal. (Clean CA)	RH LH	43PA00 43N900	N/A	N/A	Not Available w/LH fuel tanks	Not Available w/RH fuel tanks	Not Available
55 gal.	RH LH Dual	43L700 43L800 43L900	N/A	N/A	Not Available w/LH or dual fuel tanks	Not Available w/RH or dual fuel tanks 153" WB w/ A/L Tandem Susp.	Req. min. 165" wb w/ all Neway, walking beam, HFS, HAS, tandem susp. Req. min. 177 WB w/ A/L tandem susp.
80 gal.	RH LH Dual	43MB00 43MA00 43MC00	N/A	N/A	Not Available w/LH or dual fuel tanks Req. min. 153" wb w/all Neway, Walking beam, HFS, HAS, 51' A/L and 165" w/55" and 59" A/L tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 153" wb w/all Neway, Walking beam, HFS, HAS, 51' A/L and 165" w/55" and 59"	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/Walking beam, HAS, A/L and HFS tandem susp. Req. Min. 189" wb w/Neway tandem susp.
DEEP RECTANGULAR							
60 gal. (Clean CA)	RH LH	43PE00 43PD00	N/A	N/A	Not Available w/LH fuel tanks	Not Available w/RH fuel tanks	Not Available
75 gal.	RH LH Dual	43M100 43M000 43M200	N/A	N/A	Not Available w/LH or dual fuel tanks Req. min. 153" wb w/Neway and A/L tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 153" wb w/Neway and A/L tandem susp.	Req. min. 165" wb w/all tandem susp.
100 gal.	RH LH Dual	43M400 43N000 43M500	N/A	N/A	Not Available w/LH or dual fuel tanks Not Available w/153" wb & single rear axle in comb. w/14,600 lb. FA thru 20,000 lb. FA or w/severe duty applications Req. min. 165" wb w/Neway, and A/L 55" and 59" tandem susp. Req. min. 153" WB w/ A/L 51"tandem susp.	Not Available w/RH or dual fuel tanks Not Available w/153" wb & single rear axle in comb. w/14,600 lb. FA thru 20,000 lb. FA or w/severe duty applications Req. min. 165" wb w/Neway, and A/L 55" and 59" tandem susp. Req. min. 153" WB w/ A/L 51" tandem susp.	Req. min. 153" wb w/all single rear susp. Not Available w/153" wb & single rear axle in comb. w/ 14,600 lb. FA thru 20,000 lb. FA or w/severe duty applications. Req. min. 177" wb w/Walking beam, HAS or HFS and A/L tandem susp. Req. min. 189" wb w/Neway tandem susp.

101" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT7501 Mid-Range Diesel (4x2 & 6x4)
LH TANK REAR - RH TANK FORWARD MTD.

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX
					LH (29KE00 Standard Weight (29KD00) Light Weight	RH (29LG00 Standard Weight (29LJ00) Light Weight	LH (29KF00)
SHALLOW MIXED RECTANGULAR							
30 gal. LH, 55 gal. RH	Mixed	43MD00	N/A	N/A	Not Restricted	Not Available	Not Available
55 gal. LH, 80 gal. RH	Mixed	43ME00	N/A	N/A	Req. min. 165" wb w/all tandem susp.	Not Available	Not Available
DEEP MIXED RECTANGULAR							
50 gal. LH, 75 gal. RH	Mixed	43M600	N/A	N/A	Req. min. 153" wb w/all tandem susp.	Not Available	Not Available
75 gal. LH, 100 gal. RH	Mixed	43M700	N/A	N/A	Not Available w/153" wb & single rear axle in comb. w/14,600 lb. FA thru 20,000 lb. FA or w/severe duty applications. Req. min. 153" wb w/52" or 54" HAS & HFS tandem susp. Req. min. 165" wb w/walking beam, all Neway tandem & 60" HAS and A/L tandem susp.	Not Available	Not Available

101" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT7501 Mid-Range Diesel (4x2 & 6x4)
REAR MTD. FUEL TANK

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX
					LH (29KE00 Standard Weight (29KD00) Light Weight	RH (29LG00 Standard Weight (29LJ00) Light Weight	LH (29KF00)
SHALLOW RECTANGULAR							
55 gal.	RH LH Dual	43L700 43L800 43L900	N/A	N/A	Req. min. 165" wb w/all tandem susp.	Not Available	Not Available
80 gal.	RH LH Dual	43MB00 43MA00 43MC00	N/A	N/A	Req. min. 177" wb w/all tandem susp. Req. 153" wb w/ A/L single susp.	Not Available	Not Available
DEEP RECTANGULAR							
50 gal.	RH LH Dual	43MX00 43MW00 43MY00	N/A	N/A	Req. min. 153" wb w/all tandem susp.	Not Available	Not Available
75 gal.	RH LH Dual	43M100 43M000 43M200	N/A	N/A	Not Available w/153" wb & single rear axle in comb. w/14,600 lb. FA thru 20,000 lb. FA or w/severe duty applications. Req. min. 153" wb w/52" or 54" HAS & HFS tandem susp. Req. min. 165" wb w/walking beam, all Neway tandem & 60" HAS, and A/L tandem susp.	Not Available	Not Available
100 gal.	RH LH Dual	43M400 43N000 43M500	N/A	N/A	Req. min. 153" wb w/52" ML or TL or Neway and A/L single rear susp. Req. min. 177" wb w/all tandem susp.	Not Available	Not Available

101" BBC
EXHAUST RESTRICTIONS
L/LT7501 Mid-Range Diesel (4x2 & 6x4)
FORWARD MTD. FUEL TANKS

The chart below indicates exhaust restrictions by engine. Combination is not restricted unless indicated.

EXHAUST	CUMMINS ISB	CUMMINS ISC	CATERPILLAR 3126
Single Horizontal RH Muffler & Pipe 32FD00 (Standard) Req. Min. 153" wb w/single rear axle; Req. min. 165" wb w/walking beam, HFS or HAS tandem susp.; Req. min. 177" wb w/Neway and A/L tandem susp.	Not Restricted to engines	Not Restricted to engines	Not Restricted to engines
Single Horizontal RH Muffler & Vertical Outlet (cab mtd.) (over frame) 32FE00, 32FG00 Req. min. 153" wb w/single rear axle; Req. min. 165" wb w/walking beam, HFS or HAS tandem susp.; Req. min. 177" wb w/Neway and A/L tandem susp.; N.A w/153" wb single rear axle trucks in comb. w/14,600 lb. thru 20,000 lb. front axle.	Not Restricted to engines	Not Restricted to engines	Not Restricted to engines
Single Horizontal RH Muffler & Vertical Outlet (cab mtd.) (under frame) 32FF00, 32FH00 N.A. w/RH or dual/mixed fuel tanks; Req. min. 153" wb w/single rear axle; Req. min. 165" wb w/walking beam, HFS or HAS tandem susp.; Req. min. 177" wb w/Neway and A/L tandem susp.	Not Restricted to engines	Not Restricted to engines	Not Restricted to engines
Single Horizontal RH Muffler & Vertical Outlet (frame mtd.) (over frame) 32FJ00, 32FL00 N.A. w/any 75 fuel tank, mixed 50/75, 30/55 or 55/80 gal. fuel tanks; Req. min. 153" wb w/single rear axle, Req. min. 165" wb w/walking beam, HFS or HAS tandem susp.; Req. min. 177" wb w/Neway and A/L tandem susp.; N.A w/153" wb single axle trucks in comb. w/14,600 lb. or 60,000 lb. front axle.	Not Restricted to engines	Not Restricted to engines	Not Restricted to engines
Single Horizontal RH Muffler & Vertical Outlet (frame mtd.) (under frame) 32FK00, 32FM00 N.A. w/any 75 gal. fuel tank; N.A. w/RH or dual/mixed fuel tanks; Req. min. 153" wb w/single rear axle, Req. min. 165" wb w/walking beam, HFS or HAS tandem susp.; Req. min. 177" wb w/Neway and A/L tandem susp.	Not Restricted to engines	Not Restricted to engines	Not Restricted to engines
Single Vertical Muffler & Vertical Outlet (cab mtd.) 32FW00, 32FX00 N.A. w/RH clean CA fuel tanks	Not Restricted to engines	Not Restricted to engines	Not Restricted to engines
Single Vertical Muffler & Vertical Outlet (frame mtd.) 32FY00, 32F000 N.A. w/75 gal. fuel tank, mixed 30/55, 55/80 or 50/75 gal. fuel tanks; N.A. w/RH Clean CA fuel tanks; N.A. w/80 gal. RH or dual fuel tanks; N.A. w/55 gal fuel tanks	Not Restricted to engines	Not Restricted to engines	Not Restricted to engines
Single Transverse RH Muffler Horizontal Outlet 32FN00 Req. min. 165" wb w/single axle and 189" wb w/tandem axles; N.A. w/RH or dual/mixed fuel tanks.	Not Available	Not Restricted to engines	Not Restricted to engines
Single Transverse Muffler Horizontal Outlet 32GC00 (Mounted between frame rails) (For Beverage applications) (Avail. w/4x2 truck only) (Req. min. 177" wb)	Not Restricted to engines	Not Restricted to engines	Not Restricted to engines
Single Transverse RH Muffler Vertical Outlet (cab mtd.) 32FP00, 32FR00 N.A. w/RH or dual/mixed tanks; Req. min. 153" wb w/single axle and 177" wb w/tandem axles	Not Available	Not Restricted to engines	Not Restricted to engines

**101" BBC
EXHAUST RESTRICTIONS
L/LT7501 Mid-Range Diesel (4x2 & 6x4)
REAR MTD. FUEL TANKS**

The chart below indicates exhaust restrictions by engine. Combination is not restricted unless indicated.

EXHAUST	CUMMINS ISB	CUMMINS ISC	CATERPILLAR 3126
Single Horizontal Muffler & Pipe 32FD00 (Standard) Req. Min. 153" wb w/single rear axle; Req. min. 165" wb w/walking beam, HFS or HAS tandem susp.; Req. min. 177" wb w/Neway and A/L tandem susp.;	Not Restricted to engines	Not Restricted to engines	Not Restricted to engines
Single Horizontal Muffler & Vertical Outlet (cab mtd.) (over frame) 32FE00, 32FG00 Req. Min. 153" wb w/single rear axle; Req. min. 165" wb w/walking beam, HFS or HAS tandem susp.; Req. min. 177" wb w/Neway and A/L tandem susp. N.A. w/153" wb single axle trucks in comb. w/14,600 lb. thru 20,000 lb. front axle.	Not Restricted to engines	Not Restricted to engines	Not Restricted to engines
Single Horizontal Muffler & Vertical Outlet (cab mtd.) (under frame) 32FF00, 32FH00 N.A. w/RH or dual/mixed fuel tanks; Req. Min. 153" wb w/single rear axle; Req. min. 165" wb w/walking beam, HFS or HAS tandem susp.; Req. min. 177" wb w/Neway and A/L tandem susp.;	Not Restricted to engines	Not Restricted to engines	Not Restricted to engines
Single Horizontal Muffler & Vertical Outlet (frame mtd.) (over frame) 32FJ00, 32FL00 N.A. w/any 50 gal. fuel tank; N.A. w/153" wb single axle trucks in comb. w/14,600 lb. or 16,000 lb. front axle. Req. Min. 153" wb w/single rear axle; Req. min. 165" wb w/walking beam, HFS or HAS tandem susp.; Req. min. 177" wb w/Neway and A/L tandem susp.; N.A. w/mixed 50/75, 30/55 or 55/80 gal fuel tanks	Not Restricted to engines	Not Restricted to engines	Not Restricted to engines
Single Horizontal Muffler & Vertical Outlet (frame mtd.) (under frame) 32FK00, 32FM00 N.A. w/any 50 gal. fuel tank; N.A. w/RH or dual/mixed fuel tanks; Req. Min. 153" wb w/single rear axle; Req. min. 165" wb w/walking beam, HFS or HAS tandem susp.; Req. min. 177" wb w/Neway and A/L tandem susp.	Not Restricted to engines	Not Restricted to engines	Not Restricted to engines
Single Vertical Muffler & Vertical Outlet (cab mtd.) 32FW00	Not Restricted to engines	Not Restricted to engines	Not Restricted to engines
Single Vertical Muffler & Vertical Outlet (frame mtd.) 32FY00, 32FX00 N.A. w/50 gal. fuel tank; N.A. w/55 Shallow RH or dual rectangular tanks; N.A. w/mixed 30/55, 55/80 or 50/75 gal. fuel tanks;	Not Restricted to engines	Not Restricted to engines	Not Restricted to engines
Single Transverse RH Muffler & Horizontal Outlet 32FN00, 32F000 Req. min. 165" wb w/single axle and 189" wb w/tandem axles; N.A. w/RH or dual/mixed fuel tanks;	Not Available	Not Restricted to engines	Not Restricted to engines
Single Transverse Muffler & Horizontal Outlet 32GC00 (Mounted between frame rails) (For Beverage applications) (Avail. w/4x2 truck only) (Req. min. 177" wb)	Not Restricted to engines	Not Restricted to engines	Not Restricted to engines
Single Transverse Muffler & Vertical Outlet (cab mtd.) 32FP00, 32FR00 Req. min. 153" wb w/single axle and 177" wb w/tandem axle; N.A. w/RH or dual/mixed tanks	Not Available	Not Restricted to engines	Not Restricted to engines

101" BBC
QUARTER FENDER* RESTRICTIONS
(Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/LT7501 Mid-Range Diesel (4x2 & 6x4)
FORWARD MTD. FUEL TANKS

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
SHALLOW RECTANGULAR							
55 gal.	RH LH Dual	43L700 43L800 43L900	N/A	N/A	Req. min. 165" wb w/ all tandem susp. Req. min. 177" wb w/ Airliner tandem susp.	Req. min. 165" wb w/ all tandem susp.	Req. min. 165" wb w/all tandem susp. Req. min. 189" wb w/ Airliner tandem susp.
80 gal.	RH LH Dual	43MB00 43MA00 43MC00	N/A	N/A	Req. min. 153" wb w/ all single rear susp. Req. min. 177" wb w/all tandem susp.	Req. min. 153" wb w/ all single rear susp. Req. min. 177" wb w/all tandem susp. Req. min. 189" wb w/ Airliner 55" or 59" tandem susp.	Req. min. 153" wb w/ all single rear susp. Req. min. 177" wb w/all tandem susp. Req. min. 189" wb w/ Airliner tandem susp.
DEEP RECTANGULAR							
75 gal.	RH LH Dual	43M100 43M000 43M200	N/A	N/A	Req. min. 165" wb w/ all tandem susp. Req. min. 177" wb w/ Airliner 55" or 59" tandem susp.	Req. min. 165" wb w/ 60" Walking beam or 60" HAS tandem susp. Req. 177" min. wb w/60" Neway and all A/L tandem susp.	Req. min. 177" wb w/ 60" Walking beam or 60" HAS tandem susp. w/ under cab or aft-of-cab battery box Req. min. 177" wb w/60" Neway tandem susp. Req. min. 189" wb w/ Airliner tandem susp.
100 gal.	RH LH Dual	43M400 43N000 43M500	N/A	N/A	Req. min. 177" wb w/ all tandem susp. Req. min. 189" wb w/ Airliner 55" or 59" tandem susp.	Req. min. 153" wb w/ all single rear susp. Req. min. 177" wb w/all tandem susp. Req. min. 189" wb w/ Airliner 55" or 59" tandem susp.	Req. min. 153" wb w/ all single rear susp. Req. min. 165" wb w/all tandem susp. Req. min. 189" wb w/ Airliner tandem susp.

* Avail. w/Tractor only

101" BBC
QUARTER FENDER* RESTRICTIONS
(Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/LT7501 Mid-Range Diesel (4x2 & 6x4)
LH TANK REAR - RH TANK FORWARD MTD.

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
SHALLOW MIXED RECTANGULAR							
30 gal. LH, 55 gal. RH	Mixed	43MD00	N/A	N/A	Req. min. 165" wb w/ all tandem susp. Req. min. 177" wb w/ Airliner tandem susp.	Not Available	Req. min 177" wb w/all tandem susp. Req. min. 189" wb w/ Airliner tandem susp.
55 gal. LH, 80 gal. RH	Mixed	43ME00	N/A	N/A	Req. min. 153" wb w/ all single rear susp. Req. min. 177" wb w/all tandem susp.	Not Available	Req. min 177" wb w/all tandem susp. Req. min. 189" wb w/ Airliner tandem susp.
DEEP MIXED RECTANGULAR							
50 gal. LH, 75 gal. RH	Mixed	43M600	N/A	N/A	Req. min. 153" wb w/ all single rear susp. Req. min. 177" wb w/all tandem susp.	Not Available	Req. min 177" wb w/all tandem susp. Req. min. 189" wb w/ Airliner tandem susp.
75 gal. LH, 100 gal. RH	Mixed	43M700	N/A	N/A	Req. min. 153" wb w/ all single rear susp. Req. min. 177" wb w/all tandem susp.	Not Available	Req. min. 153" wb w/all single susp. Req. min. 165" wb w/all tandem susp. Req. min. 189" wb w/ Airliner tandem susp.

* Avail. w/Tractor only

101" BBC
QUARTER FENDER* RESTRICTIONS
(Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/LT7501 Mid-Range Diesel (4x2 & 6x4)
REAR MTD. FUEL TANKS

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
SHALLOW RECTANGULAR							
55 gal.	RH LH Dual	43L700 43L800 43L900	N/A	N/A	Req. min. 165" wb w/all tandem susp. Req. min. 177" wb w/ Airliner tandem susp.	Not Available	Req. min. 177" wb w/ all tandem susp. Req. min. 189" wb w/ Airliner tandem susp.
80 gal.	RH LH Dual	43MB00 43MA00 43MC00	N/A	N/A	Req. min. 153" wb w/ all single rear susp. Req. min. 177" wb w/52" or 54" Walking Beam, 52" HAS, HFS, Neway or 51" Airliner tandem susp. Req. min. 189" wb w/60" walking Beam or 60" HAS or Airliner 55" and 59" tandem susp.	Not Available	Req. min. 153" wb w/ all single rear susp. Req. min. 177" wb w/52" or 54" Walking Beam, 52" HAS, HFS or Neway tandem susp. Req. min. 189" wb w/60" Walking Beam or 60" HAS or Airliner tandem susp.
DEEP RECTANGULAR							
50 gal.	RH LH Dual	43MX00 43MW00 43MY00	N/A	N/A	Req. min. 165" wb w/52" or 54" Walking Beam, 52" HAS, HFS or Neway or 51" Airliner tandem susp. Req. min. 177" wb w/60" walking beam, 60" HAS or Airliner 55" and 59" tandem susp.	Not Available	Req. min. 165" wb w/52" or 54" Walking Beam, 52" HAS, HFS or Neway tandem susp. Req. min. 177" wb w/60" Walking beam or 60" HAS tandem susp. Req. min. 189" wb w/ Airliner tandem susp.
75 gal.	RH LH Dual	43M100 43M000 43M200					
100 gal.	RH LH Dual	43M400 43N000 43M500	N/A	N/A	Req. min. 153" wb w/ all single rear susp. Req. min. 177" wb w/52" or 54" Walking Beam, 52" HAS, HFS, Neway or 51" Airliner tandem susp. Req. min. 189" wb w/60" walking Beam, 60" HAS or Airliner 55" and 59" tandem susp.	Not Available	Req. min. 153" wb w/ all single rear susp. Req. min. 177" wb w/52" or 54" Walking Beam, 52" HAS, HFS or Neway tandem susp. Req. min. 189" wb w/60" Walking Beam, 60" HAS or Airliner tandem susp.

* Avail. w/Tractor only

101" BBC
AIRLINER SINGLE DRIVE SUSPENSION APPLICATIONS
L7501 Mid-Range Diesel (4x2)

Application	Codes	21,000 Lbs.	Codes	23,000 Lbs.
Body (1) (Truck or Drom)	AABH00 AABH00 AABJ00 AAAM00 AAA400 AAA500	Attic Van Only Dry Van Body Only Flatbed Only (Linehaul-Flatbed) Reefer Van Body Only Tank Only (Bulk Hauler-Dry) Tank Only (Bulk Hauler-Liquid)	AAAG00 AAAG00	All OK except: Mixer (Construction-Concrete Mixer) Mixer with Lifiable Tag axle
Trailer (2) (Tractor or Truck)	AABA00 AAAT00 AABC00 AABD00 AAAP00 AABE00	All OK except: Farm (Farm Service/Landscaping) Logging Mining Oil Field Refuse (Refuse-Refuse Collection) Refuse (Refuse/Recycling)		All OK
Expected Terrain	ACAD00 ACAA00	100% On-Highway Max. 10% Off-Highway	ACAD00 ACAA00 ACAB00	100% On-Highway Max. 10% Off-Highway Max. 25% Off-Highway
Most Severe Road Surface	ADAA00 ADAB00 ADAC00 ADAF00	Excellent Highway Smooth Concrete or Asphalt (Typical Highway) Rough Concrete or Asphalt (Broken Concrete) Maintained Gravel only (Packed Gravel)	ADAA00 ADAB00 ADAD00 ADAE00 ADAC00 ADAF00 ADAG00	Excellent Highway Smooth Concrete or Asphalt (Typical Highway) Packed Clay-Bound Gravel Hard Packed Natural Soil Rough Concrete or Asphalt (Broken Concrete) Maintained Gravel (Packed Gravel) Soft Soil/Mud/Debris (Landfill) (Spongy Natural Soil)
Where Domiciled		USA 50 St. Only USA 49 St. Only Canada		All OK
Maximum Expected GCW		115,000 lbs. and less		115,000 lbs. and less
Maximum Total Pusher/Tag Axle GAWR		Not Available		20,000 lbs. and less

(1) Mandatory to also select Vehicle Designation Code AAACOO (Truck)

(2) Mandatory to also select Vehicle Designation Code AAABOO (Tractor) or Code AAADOO (Truck w/Trailer)

101" BBC
AIRLINER TANDEM DRIVE SUSPENSION APPLICATIONS
LT7501 Mid-Range Diesel (6x4)

Application	Codes	40,000 lbs. EXTRA DUTY	Codes	46,000 lbs.
Body (1) (Truck or Drom)	AABH00 AAAL00 AABH00 AABJ00 AAAM00 AAA400 AAA500	Attic Van Only Car/Truck Carrier Body Only (Linehaul-Auto Transport) Dry Van Body Only Flatbed Only (Linehaul-Flat Bed) Reefer Van Body Only Tank Only (Bulk Hauler-Dry) Tank Only (Bulk Hauler-Liquid)	AAAG00 AAAG00 AAA100	All OK except: Mixer(Construction-ConcreteMixer) Mixer with Liftable tag axle Severe Duty (Mixer)
Trailer (2) (Tractor or Truck)		All OK		All OK
Expected Terrain	ACAD00 ACAA00	100% On-Highway Max. 10% Off-Highway Domiciled USA	ACAD00 ACAA00 ACAB00	100% On-Highway Max. 10% Off-Highway Max. 25% Off-Highway
Most Severe Road Surface	ADAA00 ADAB00 ADAC00 ADAF00	Excellent Highway Smooth Concrete or Asphalt (Typical Highway) Rough Concrete or Asphalt (Broken Concrete) Maintained Gravel Domiciled USA or Canada only (Packed Gravel)	ADAA00 ADAB00 ADAD00 ADAE00 ADAC00 ADAF00 ADAG00	Excellent Highway Smooth Concrete or Asphalt (Typical Highway) Packed Clay-Bound Gravel Hard Packed Natural Soil Rough Concrete or Asphalt (Broken Concrete) Maintained Gravel (Packed Gravel) Soft Soil/Mud/Debris (Landfill) (Spongy Natural Soil)
Where Domiciled		USA 50 St. Only USA 49 St. Only Canada Only (See Export Note)		All OK
Maximum Expected GCW		120,000 lbs. and less domiciled in Canada 140,000 lbs. and less domiciled in USA 100,000 lbs. and less Export		180,000 lbs. and less
Maximum Total Pusher/Tag Axle GAWR		12,000 lbs. and less		24,000 lbs. and less
Bulk Commodity or High Load Factor Truck w/out Trailer		OK		OK

(1) Mandatory to also select Vehicle Designation Code AAAC00 (Truck).

(2) Mandatory to also select Vehicle Designation Code AAAB00 (Tractor) or Code AAAD00 (Truck w/Trailer).

Export Note: For export, the AirLiner 40,000 lb. EXTRA DUTY suspension is restricted to on-highway only.