

L9501 (Heavy Duty Diesel)
GVWR WITH STANDARD EQUIPMENT – 33,200 LBS.
 (Consult Truck Selection Section of the Data Book to Compute GVWR with Optional Equipment)

101" BBC - 4x2

GCWR's – See L/LT Models, Page 1

Maximum GVWR (lbs.) for Specific Wheelbase-Frame Combinations and Warranty					
	Frame Code For Highway Service Only			Frame Code For On-Off Highway Service	
	40E700 10.76 SM 120K PSI	40E900 ¹ 13.3 SM 120K PSI	40FA00 15.9 SM 120K PSI	40E900 13.3 SM 120K PSI	40FA00 15.9 SM 120K PSI
WB					
141	35,000 ²	N.A.	N.A.	N.A.	N.A.
153 - 165	35,000 ²	35,000 ²	39,000 ⁴	35,000 ²	37,600 ³
177 - 261	N.A.	35,000 ²	37,600 ³	N.A.	35,000 ²

Actual GAWR is determined by front/rear axle, suspension, and tire & wheel selections in addition to these frame ratings.

¹ Std. Frame

² 12,000 lb. max. front axle

³ 14,600 lb. max. front axle


⁴ 16,000 lb. max. front axle

*Dimensions in Inches – CA dim. with 101 in. BBC						Base Curb Weight (lbs.)		
WB	CA	Truck AF ¹	Tractor AF ¹	Truck OAL	Tractor OAL	Front	Rear	Total
141	72	39	37	212	210	7035	4260	11295
153	84	39	37	224	222	6944	4380	11324
165	96	63	37	260	234	6881	4595	11476
177	108	63	37	272	246	6820	4693	11513
189	120	63	37	284	258	6481	4794	11275
207	138	75	37	314	276	6718	4940	11658
213	144	75	37	320	282	6722	5006	11728
225	156	75	37	332	294	6693	5073	11766
237	168	90	37	359	306	6671	5217	11888
243	174	90	37	365	312	6663	5248	11911
249	180	102	37	383	318	6663	5325	11988
261	192	114	37	407	330	6644	5408	12052

* Dimensions are for base models w/standard equipment.

¹ Min. AF is 40" with 52" springs.

Weights are approximate and include minimum required equipment, water and oil (less fuel)

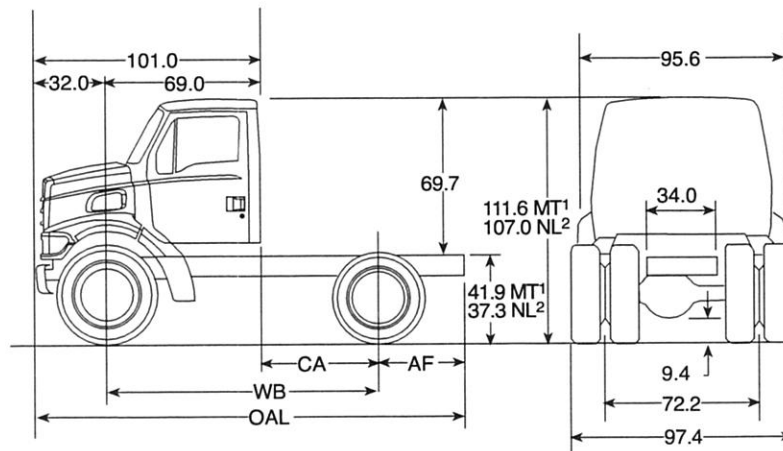

MT¹ = Empty
 NL² = Normal Load

NOTE: Dimensions do not include cab clearance and identification lights.

Note: Recommend adequate tires for axle loadings. See Tires/Wheels/Wheel Equip. Section of Component Information Data Book. All capacity ratings shown represent on-highway application.

LT9501 (Heavy Duty Diesel)
GVWR WITH STANDARD EQUIPMENT – 46,000 LBS.
 (Consult Truck Selection Section of the Data Book to Compute GVWR with Optional Equipment)
101" BBC - 6x4
 GCWR's – See L/LT Models, Page 1

Maximum GVWR (lbs.) for Specific Wheelbase-Frame Combinations and Warranty							*Dimensions in Inches – CA dim. with 101 in. BBC						Base Curb Weight (lbs.)		
Frame Code For On-Highway Service Only							Truck		Tractor		Truck		Tractor		Total
WB	40E900 ¹ 13.3 SM 120K PSI	40FA00 15.9 SM 120K PSI	40FB00 20.5 SM 120K PSI	40GN00 26.0 SM 120K PSI	40FC00 27.0 SM 120K PSI	40FD00 30.0 SM 120K PSI	WB	CA	AF ¹	AF ¹	OAL	OAL	Front	Rear	
153-165	52,000 ²	56,000 ⁴	N.A.	N.A.	N.A.	N.A.	153	84	60	60	245	245	7457	6878	14335
177-189	52,000 ²	56,000 ⁴	56,000 ⁴	N.A.	64,000	66,000	165	96	63	60	260	257	7450	6933	14383
207-237	46,000 ²	54,600 ³	56,000 ⁴	58,000 ⁵	64,000	66,000	177	108	63	60	272	269	7457	6986	14443
243-261	46,000 ²	54,600 ³	56,000 ⁴	N.A.	64,000	66,000	189	120	63	60	284	281	7471	7063	14534
							207	138	75	60	314	299	7475	7144	14619
							213	144	75	60	320	305	7478	7160	14638
							225	156	75	60	332	317	7497	7205	14702
							237	168	90	60	359	329	7492	7309	14801
							243	174	90	60	365	335	7517	7352	14869
							249	180	102	60	383	341	7534	7420	14954
							261	192	114	60	407	353	7539	7479	15018

Actual GAWR determined by front/rear axle, suspension, and tire & wheel selections in addition to these frame ratings.

¹ Std. Frame

² 12,000 lb. max. front axle

³ 14,600 lb. max. front axle

⁴ 16,000 lb. max. front axle

⁵ 40,000 lb. max. rear axle

* Dimensions are for base models w/standard equipment. Weights are approximate and include minimum required equipment, water and oil (less fuel)

Maximum GVWR (lbs.) for Specific Wheelbase-Frame Combinations and Warranty									
Frame Code For On-Off Highway Service & Severe Duty Non-Mixer							Frame Code For Mixer Service		
WB	40FA00 15.9 SM 120K PSI	40FE00 ⁵ 20.25 SM 125K PSI	40FB00 20.5 SM 120K PSI	40GN00 26.0 SM 120K PSI	40FC00 27.0 SM 120K PSI	40FD00 30.0 SM 120K PSI	40GN00 26.0 SM 120K PSI	40FC00 27.0 SM 120K PSI	40FD00 30.0 SM 120K PSI
153-165	52,000 ²	64,000 ⁵	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
177-189	46,000 ²	64,000 ⁵	56,000 ⁴	N.A.	64,000	66,000	N.A.	56,000 ⁴	66,000
207-225	N.A.	64,000 ⁵	54,600 ³	58,000 ⁷	64,000	66,000	54,600 ³	56,000 ⁴	66,000
237	N.A.	N.A.	54,600 ³	58,000 ⁷	64,000	66,000	54,600 ³	N.A.	N.A.
243-261	N.A.	N.A.	54,600 ³	N.A.	64,000	66,000	N.A.	N.A.	N.A.

Actual GAWR determined by front/rear axle, suspension, and tire & wheel selections in addition to these frame ratings.

² 12,000 lb. max. front axle


⁵ 18,000 lb. max. front axle

³ 14,600 lb. max. front axle

⁶ Avail. as extended frame only.

⁴ 16,000 lb. max. front axle

⁷ 40,000 lb. max. rear axle

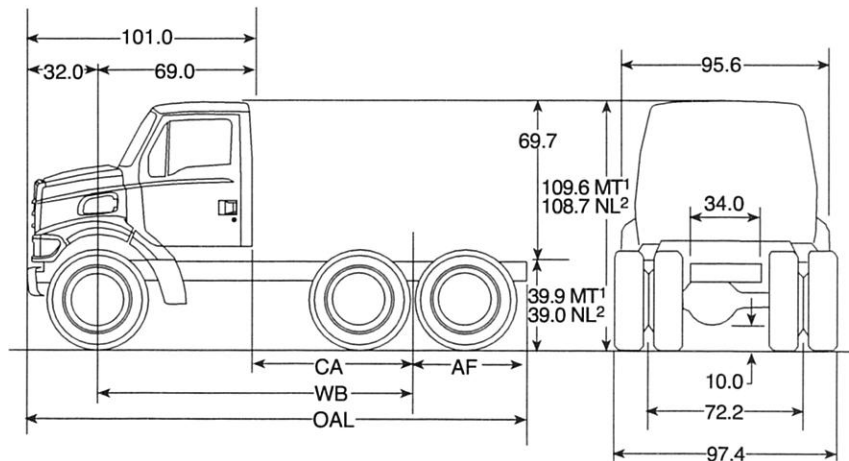

MT¹ = Empty
 NL² = Normal Load

NOTE: Dimensions do not include cab clearance and identification lights.

Note: Recommend adequate tires for axle loadings. See Tires/Wheels/Wheel Equip. Section of Component Information Data Book.
 All capacity ratings shown represent on-highway application.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — STANDARD EQUIPMENT

		4x2	6x4
		L9501	LT9501
SALES CODE	10 — AXLE, FRONT		
10AE00	12,000 lb.	S	S
	11 — AXLE, REAR		
	23,000 lb. Single-Speed Meritor RS-23-160	S	
	40,000 lb. Single-Speed Meritor RT-40-145		S
	13 — AXLE EQUIPMENT		
STD.	Brake Drums, Front & Rear — Full Cast	S	S
STD.	Bushings, Kingpin, Front Axle, Bronze	S	S
STD.	Differential, Inter-Axle — Full Locking Driver Controlled		S
13A900	Differential, Main — Non-Locking	S	S
13AF00	Drag Link & Tie Rods — Greaseable	S	S
STD.	Hubs, Front & Rear — Ductile Iron	S	S
STD.	Magnetic Traps, Rear Axle — Drain & Fill Plugs	S	S
13BT00	Steering, Power — Integral, TRW TAS-65 Gear	S	S
13H700	Wheel Seals — Front, Grease Type	S	S
STD.	Wheel Seals — Rear, Wet Type, C.R. "Scotseal", Unitized	S	S
	16 — BRAKES, SERVICE		
16AW00	Brakes, Front, Air — Cam Type		
16A000	Front — 15" x 4" Meritor Q Plus.....	S	S
	Rear — 16-1/2" x 7" Meritor Q Plus	S	S
	19 — BRAKE EQUIPMENT		
19MF00	ABS, Antilock Brake System — Full Vehicle, Four Channel w/ Wheel End Sensing	S	S
19FC00	Air Compressor, 13.2 CFM, Water Cooled, Bendix Tu-Flo 550	S	S
19NL00	Air Reservoir, Steel	S	S
STD.	Drain Cocks, Manual	S	S
	Parking Brake, Spring-Set Rear Axle — Maxi II		
19NY00	Rear, Single Axle (Two-Wheel).....	S	
19N000	Rear, Tandem Axle (Four-Wheel) (Standard w/ truck).....		S
STD.	Slack Adjusters, Front & Rear — 5.5" Automatic, Gunite	S	S
	22 — CAB, STEEL		
22BJ00	Value Interior Trim		
	Medium Graphite Interior Trim Color	S	S
	23 — CAB EQUIPMENT/ EXTERIOR		
STD.	Assist Handles, R.H. & L.H.	S	S
STD.	Cab Exterior, Standard Level	S	S
STD.	Cab Mounts, Front — Trunnion	S	S
STD.	Cab Suspension, Rear, Conventional Rubber	S	S
	Glass		
STD.	Door Vent Windows, Solar Tinted L.H. & R.H. (Two way w/locking latch).....	S	S
STD.	Windshield & Side Glass — Solar Tinted	S	S
STD.	Rear Window, None	S	S
232H00	Grille, Hood-Mounted (Painted Body Color).....	S	S
STD.	Hood, Accent Bar (Painted Body Color).....	S	S
23AB00	Hood, Forward Tilting Front End	S	S
23KH00	Horn, Single — Electric	S	S
23YX00	Mirrors, Dual, Western, Painted	S	S
233B00	Mirror, Auxiliary, 5.5" Dia., Bottom Mounted, Painted, R.H. only	S	S
23RA00	Mirror Arms, 96" (Std. w/ Truck)	S	S
STD.	Windshield Wipers, Interval, Electric (w/lift-off "Wet Arm" windshield wiper arms and integral nozzles, electric washer pump & 8-liter reservoir)	S	S

NOTE: All capacity ratings shown represent on-highway application.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — STANDARD EQUIPMENT

		4x2	6x4
		L9501	LT9501
SALES CODE	24 — CAB EQUIPMENT/ INTERIOR		
24AL00	Cigar Lighter (I/P Mounted).....	S	S
24LY00	Console, Storage, Engine Cover Mounted	S	S
STD.	Door Locks, Manual L.H. & R.H.	S	S
STD.	Floor Mat, Full Vinyl	S	S
STD.	Heater, Defroster/ Demister and Fresh Air Ventilation	S	S
STD.	Lamp, Dome, Center Mounted	S	S
STD.	Radio, None	S	S
STD.	Steering Column, Stationary	S	S
24B500	Steering Wheel, 18" Dia.	S	S
STD.	Sun Visors, Single, Vinyl — L.H. & R.H. (Incl. ticket strap).....	S	S
STD.	Window Control — Manual (Side Windows)	S	S
	25 — SEATING		
	(Seats are color coordinated to cab trim level. Passenger seat matches driver seat in appearance and material; All seats include seat belts.)		
25AACV	National, Mid-Back		
25GH00	Driver, Air Suspension (Incl. Fore-Aft isolator).....	S	S
	Passenger, None	S	S
	OTHER SEATING EQUIPMENT		
25AAD3	Belts, Seat — Lap and Shoulder, 3-pt. mounting w/ Adjustable D-Ring		
	Driver Only	S	S
	26 — INSTRUMENTS/ GAUGES/ SWITCHES/ WARNING DEVICES		
26MR00	Air Cleaner Restriction Indicator, Air Cleaner Mounted	S	S
26NN00	Gauges, Electronic Cluster (Incl. speedometer, tachometer, fuel level, coolant temp., voltmeter, oil press. & dual air brake press.).....	S	S
26M700	Gauge Control Panel, Flat Gauge Insert — R.H.	S	S
STD.	Parking Brake Control, I/P Mounted	S	S
26MY00	Turn Signal Switch, Signal-Stat, Non-Cancelling	S	S
STD.	Warning Lights		
STD.	ABS Anti-Lock System	S	S
STD.	High Beam Indicator	S	S
STD.	Turn Signal Indicators	S	S
STD.	Warning Light & Buzzer — Air Brakes	S	S
	27 — ELECTRICAL		
STD.	Canadian Daytime Running Lights (Standard in Canada only)	S	S
STD.	Circuits, Customer Access		
STD.	I/P Fuse Panel Pkg.	S	S
STD.	Access Circuits Connector (Eng. compt., rear of cab & rear of chassis w/truck applications; Eng. compt. & rear of cab w/tractor applications).....	S	S
STD.	Circuit Protectors, Fuses	S	S
STD.	Flasher, Emergency	S	S
STD.	Lamps, Turn Signal & Side Marker Combination	S	S
STD.	Lamps, Turn Signal, Rear/ Side Facing, Hood Mounted	S	S
STD.	Lights		
STD.	Cab Marker, 5 Lights	S	S
STD.	Head, Two Rectangular Halogen, Dual Beam (Incl. stalk mounted switch for dimmer and flash to pass).....	S	S
STD.	Hood Mount Turn Signals, 2 Lights	S	S
STD.	Tail, Two w/ Integral Stop, Turn, Backup, and License Plate (Mounted inside frame rails).....	S	S
STD.	Taillight Mounting, Inside Frame Rails — 21.56" Spacing	S	S
	28 — ALTERNATORS		
28CS00	100 amp., 1400 watt Leece-Neville, Internally Regulated	S	S
	29 — BATTERIES/ BOXES/ CABLES		
29AP00	Battery, Maintenance-Free Sterling, 12 Volt		
	Two, 625 CCA (93 amp.-hr.)	S	S
29KE00	Battery Box, Frame Mounted		
	Under Cab, Standard Weight, L.H. — Forward Mounted (Incl. frame mtd. cab access steps).....	S	S
	30 — ENGINES		
	(Engine listings show Advertised Horsepower/Advertised Torque/Governed RPM; See Safety-Noise-Emission Section of Component Info. Data Book)		
30X000	CATERPILLAR C-10 (ELECTRONIC) DIESEL		
	305 HP/ 1150 lb.-ft./ 1800 RPM	S	S

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — STANDARD EQUIPMENT

		4x2	6x4
		L9501	LT9501
SALES CODE	32 — EXHAUSTS		
32FW00	Single Vertical Muffler & Vertical Outlet, R.H. Plain Outlet — Cab Mtd.	S	S
	33 — EXHAUST EQUIPMENT		
STD.	Straight Vertical Stack End	S	S
	36 — CLUTCHES		
36A700	Clutch, Eaton-Spicer		
STD.	14" SD, 2-plate, Ceramic (8-Spring/ 3200 lb.) Manual Adjust	S	S
	Clutch Housing, Cast Iron	S	S
	37 — ENGINE EQUIPMENT		
STD.	Air Cleaner, Single Stage, Donaldson	S	S
STD.	Air Intake, Source — Engine, Outside Air	S	S
373000	Engine Mounts, Compression Type	S	S
STD.	Engine Shutoff (Solenoid) — Ignition Key	S	S
373600	Fan Clutch, Kysor "On-Off" (Automatic Cycling).....	S	S
STD.	Hose, Radiator, EPDM Rubber (Incl. torque controlled clamps)	S	S
STD.	Radiator, Nominal Cooling — 900 sq. in. cooling module	S	S
STD.	Speed/ Cruise Control (w/electronic engines).....	S	S
STD.	Starter, Electric	S	S
STD.	Starter Interlock (Clutch Pedal Actuated)	S	S
	40 — FRAME — SINGLE REAR AXLES		
40E900	Single Channel 13.3 SM, 120,000 PSI	S	
	40 — FRAME — TANDEM REAR AXLES		
40E900	Single Channel 13.3 SM, 120,000 PSI		S
	Frame Modifications		
40EL00	Bolted Frame w/ Huck Fasteners at rear cab supt., intermediate and rear suspension crossmembers	S	S
40EN00	Frame End, Rear, Square Cut	S	S
	43 — FUEL TANKS		
43L700	Rectangular Tanks, Steel — Shallow 55 gal. Single R.H.	S	S
	44 — FUEL TANK EQUIPMENT		
STD.	Forward Mounted Fuel Tank, R.H.	S	S
STD.	Fuel Cooler	S	S
	Fuel Tank Mounting Supports		
STD.	Standard-Weight Tank Supports	S	S
	Fuel Lines		
STD.	Single Draw/ Return	S	S
	Steps		
STD.	Cab Length, Fuel Tank Mounted.....	S	S

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — STANDARD EQUIPMENT

		4x2	6x4
		L9501	LT9501
SALES CODE	46 — SUSPENSION, FRONT, MULTI-LEAF, 54" SPREAD		
46CV00	12,000 lb. Cap.	S	S
	47 — SUSPENSION, REAR		
47KA00	SUSPENSION, REAR, MULTI-LEAF 23,000 lb. Capacity (Normal Ride) (46")	S	
47KH00	SUSPENSION, REAR — AUXILIARY Single Leaf	S	
47AW00	SUSPENSION, REAR, TANDEM — FOR 40,000 LB. AXLES 34,000 lb. Cap. Hendrickson Steel Walking Beam — 52" Axle Spacing U2-340		S
	50/ 51/ 52/ 53/ 54 — TIRES-WHEELS		
50ACLO	Tires, Front Two, 275/ 80R 22.5G (14PR) Michelin XZE	S	S
51ACLO	Tires, Rear Four, 275/ 80R 22.5G (14PR) Michelin XZE	S	
51ACLO	Eight, 275/ 80R 22.5G (14PR) Michelin XZE		S
52G000	Wheels, Front Two, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	S	S
53G000	Wheels, Rear Four, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	S	
53G000	Eight, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW		S
	55 — WHEEL & TIRE EQUIPMENT		
STD.	Wheels, I.S.O. Steel Disc (Painted "Vendor White" — Not Pure White or Diamond White).....	S	S
	56 — TRANSMISSIONS		
56FN00	9-Speed Direct Fuller RT-11709H	S	S
	59 — CHASSIS EQUIPMENT		
59HS00	Bumper, Front Steel, Full Width, Flat, Painted Med. Titanium	S	S

NOTE: All capacity ratings shown represent on-highway application.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

101" BBC BASE VEHICLE PRICE ORDER CODES AND ADDITIONAL CHARGES FOR VARIOUS WHEELBASES

4x2

Order Code	Wheelbase	Suggested List Price (U.S. Dollars)
W14100-AL	141"	NC
W15300-AT	153"	STD.
W16500-AB	165"	264.00
W17700-AL	177"	264.00
W18900-AR	189"	353.00
W20700-AR	207"	431.00
W21300-AB	213"	431.00
W22500-AR	225"	431.00
W23700-AP	237"	431.00
W24300-AB	243"	675.00
W24900-AB	249"	675.00
W26100-AB	261"	675.00

6x4

Order Code	Wheelbase	Suggested List Price (U.S. Dollars)
W15300-AW	153"	STD.
W16500-AD	165"	NC
W17700-AN	177"	272.00
W18900-AV	189"	272.00
W20700-AV	207"	359.00
W21300-AD	213"	359.00
W22500-AV	225"	359.00
W23700-AT	237"	359.00
W24300-AD	243"	605.00
W24900-AD	249"	605.00
W26100-AC	261"	605.00

**INTENTIONALLY
BLANK
THIS MAILING**

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION				WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
CONFIGURATION SALES CODE						L9501	LT9501
STANDARD WHEELBASE						153"	153"
CONFIGURATION PRICE (U.S. Dollars)						60671.00	69117.00
	REFER TO ORDERING INFORMATION — RPO OR TFT FOR MANDATORY VEHICLE APPLICATION CODES AND THEIR DEFINITIONS.						
SALES CODE	10 — AXLE, FRONT						
10AG00-A6	10,000 lb. (Incl. 10,000 lb. cap. 54" spread, multi-leaf susp., Code 46CT00, 15" x 4" Meritor Q Plus brakes & TAS-65 power steering)			-29	CR 51.00	O	O
10AE00	12,000 lb. (Incl. 12,000 lb. cap. 54" spread, multi-leaf susp., Code 46CV00, 15" x 4" Meritor Q Plus brakes & TAS-65 power steering) (Standard)			—	—	S	S
10AM00-AE	13,000 lb. (Incl. 13,200 lb. cap. 54" spread, multi-leaf susp., Code 46CW00, 15" x 4" Meritor Q Plus brakes & TAS-65 power steering)			15	323.00	O	O
10A200-AK	14,600 lb. (Incl. 14,600 lb. cap. 54" spread, multi-leaf susp., Code 46CX00, 16-1/2" x 6" Meritor Q Plus brakes Code 16A200 & TAS-85 power steering)			272	1480.00	O	O
10AF00-AT	16,000 lb. (Incl. 16,000 lb. cap. 54" spread, multi-leaf susp., Code 46CY00, 16-1/2" x 6" Meritor Q Plus brakes Code 16A200 & TAS-85 power steering) (Avail. w/truck or on-off hwy. tractor only)			308	1673.00	O	O
10AD00-AK	18,000 lb. (Incl. 18,000 lb. cap. 54" spread, multi-leaf susp., Code 46C000, 16-1/2" x 6" Meritor Q Plus brakes Code 16A200 & TAS-65 L.H. & RCS-55 R.H. dual power steering gears) (Avail. w/truck or on-off hwy. tractor only)			325	2877.00		O
10AH00-AD	20,000 lb. (Incl. 20,000 lb. cap. 54" spread, multi-leaf susp., Code 46C100, 16-1/2" x 6" Meritor Q Plus brakes Code 16A200 & TAS-65 L.H. & RCS-55 R.H. dual power steering gears) (Avail. w/truck or on-off hwy. tractor only)			345	3560.00		O
	11 — AXLE, REAR						
	23,000 lb. Single-Speed Meritor RS-23-160 (Standard)			—	—	S	
	2.80	11ABG0-AB	3.73 11CC00-AX 5.38 11CJ00-AT				
	2.93	11AAF7-AB	3.91 11CD00-AY 5.63 11CK00-AT				
	3.07	11V500-AJ	4.10 11CE00-AY 6.14 11CL00-AL				
	3.21	11V600-AJ	4.30 11CF00-AY 6.43 117J00-AD				
	3.42	11CA00-AP	4.56 11CG00-BL 6.83 11CM00-AM				
	3.58	11CB00-AP	4.89 11CH00-AO 7.17 11CN00-A7				
	23,000 lb. Single-Speed Meritor RS-23-161 (Req. Neway AD-123 air susp. Code 47KG00)			24	33.00	O	
	2.80	11ACC0-AB	4.30 114900-AB				
	2.93	11ACD0-AB	4.56 11AAF3-AB				
	3.07	11ACE0-AB	4.89 11ACL0-AB				
	3.21	11ACF0-AB	5.38 11ACM0-AB				
	3.42	11ACG0-AB	5.63 11ACN0-AB				
	3.58	114300-AB	6.14 11ACP0-AB				
	3.73	11ACH0-AB	6.43 11ACQ0-AB				
	3.91	11ACJ0-AB	6.83 11AAFB-AB				
	4.10	11ACK0-AB	7.17 11ACR0-AB				
	23,000 lb. Single-Speed Meritor RS-23-186			56	516.00	O	
	2.93	11ALF0-AB	4.56 11ALP0-AB				
	3.08	11ALG0-AB	4.89 11ALQ0-AB				
	3.21	11AFR0-AB	5.13 11ALR0-AB				
	3.42	11ALH0-AB	5.38 11ALS0-AB				
	3.58	11ALJ0-AB	5.63 11ALT0-AB				
	3.73	11ALK0-AB	5.86 11ALU0-AB				
	3.91	11ALL0-AB	6.14 11ALV0-AB				
	4.10	11ALM0-AB	6.83 11ALW0-AB				
	4.30	11ALN0-AB	7.17 11ALX0-AB				

NOTE: All capacity ratings shown represent on-highway application.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION				WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	11 — AXLE, REAR (Continued)						
	40,000 lb. Single-Speed Meritor RT-40-145 (Standard)			—	—		S
	2.79	11AHG0-AB	4.33 118100-AR				
	2.93	119800-AB	4.63 118200-AR				
	3.07	11G400-AK	4.88 11FG00-AV				
	3.21	11G500-AK	5.29 11FH00-AJ				
	3.42	11E900-AP	5.86 11FJ00-AJ				
	3.58	11FA00-AP	6.14 11FK00-AB				
	3.73	11FB00-BJ	6.43 11FL00-AB				
	3.90	11AHH0-AB	6.83 11G700-AB				
	4.11	11AHJ0-AB	7.17 11FM00-AB				
	40,000 lb. Single-Speed Meritor RT-40-145P			30	344.00		O
	2.79	11AHK0-AB	4.33 118300-AR				
	2.93	119M00-AB	4.63 118400-AR				
	3.07	11MX00-AJ	4.88 11FY00-AT				
	3.21	11P700-AJ	5.29 11F000-AJ				
	3.42	11FN00-AN	5.86 11F100-AJ				
	3.58	11FP00-AN	6.14 11F200-AB				
	3.73	11FR00-AT	6.43 11F300-AB				
	3.90	11AHL0-AB	6.83 11WK00-AB				
	4.11	11AHM0-AB	7.17 11F400-AB				
	46,000 lb. Single-Speed w/ 46,000 lb. susp. (Incl. RT2-460 susp. w/bronze center bushings & 54" axle spacing Code 47BC00) (N.A. w/any HFS or HAS susp.) Meritor RT-46-160			829	3351.00		O
	3.07	11YF00-AH	4.56 11GG00-AM				
	3.21	11YG00-AH	4.89 11GH00-AM				
	3.42	11GA00-AM	5.38 11GJ00-AE				
	3.58	11GB00-AM	5.63 11GK00-AE				
	3.73	11GC00-AM	6.14 11KJ00-AB				
	3.91	11GD00-AM	6.43 11PC00-AB				
	4.10	11GE00-AM	6.83 11PG00-AB				
	4.30	11GF00-AM	7.17 11PH00-AB				
	46,000 lb. Single-Speed w/ 46,000 lb. susp. (Incl. RT2-460 susp. w/bronze center bushings & 54" axle spacing Code 47BC00) (N.A. w/any HFS or HAS susp.) Meritor RT-46-160P (Req. driver controlled main rear axle locking differential Code 13AW00)			859	3591.00		O
	3.07	11YH00-AH	4.56 11GX00-AM				
	3.21	11YJ00-AH	4.89 11GY00-AM				
	3.42	11GL00-AM	5.38 11G000-AE				
	3.58	11GN00-AM	5.63 11G100-AE				
	3.73	11GR00-AM	6.14 11N000-AB				
	3.91	11GT00-AM	6.43 11AADT-AB				
	4.10	11GV00-AM	6.83 11TA00-AB				
	4.30	11GW00-AM	7.17 11XA00-AB				

NOTE: All capacity ratings shown represent on-highway application.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	13 — AXLE EQUIPMENT				
STD.	Brake Drums, Front & Rear — Full Cast (<i>Standard</i>)	—	—	S	S
	Brake Drums, Centrifuse (<i>N.A. w/cast spoke wheels</i>)				
13AP00-BF	— Front (<i>Avail. w/10,000 lb. Front Axle Code 10AG00 or 12,000 lb. Front Axle Code 10AE00 only; Avail. w/on-hwy. tractor only</i>).....	-24	283.00	O	O
13AR00-BM	— Rear, Single Axle (<i>N.A. w/severe duty</i>)	-36	283.00	O	
13AR00-BN	— Rear, Tandem Axle (<i>N.A. w/severe duty</i>)	-72	567.00		O
	Bushings, Kingpin, Front Axle				
STD.	— (<i>Standard</i>)	—	—	S	S
13A300-BL	— Garlock Low Friction (<i>Avail. w/10,000 lb. Front Axle Code 10AG00, 12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00 only</i>)	0	331.00	O	O
STD.	Differential, Inter-Axle — Full Locking Driver Controlled (<i>Standard</i>)	—	—		S
13A900	Differential, Main — Non-Locking (<i>Standard</i>)	—	—	S	S
	Differential, Main, Lockout — Full Locking, Wheel to Wheel, Driver Controlled				
13AW00-BM	— Rear, Single Axle	15	351.00	O	
13AW00-BN	— Rear, Tandem Axle (<i>Both rear axles</i>) (<i>N.A. when air susp. dump valve Code 48AC00 is used in comb. w/air slide fifth wheel & inside/outside air Code 373T00</i>).....	30	700.00		O
13AF00	Drag Link & Tie Rods — Greaseable (<i>Standard</i>)	—	—	S	S
	Driveline — Half Round Yoke (<i>See Component Book, U-Joint Chart in Axle Equipment & Driveline Section for size and availability</i>)				
13AG00-BR	— Heavy Duty U-Joints	20	59.00	O	
13AG00-BW	— Heavy Duty U-Joints	19	83.00		O
STD.	Hubs, Front & Rear — Ductile Iron (<i>Standard</i>)	—	—	S	S
	Hubs, Aluminum				
13AT00-AX	— Front (<i>Avail. w/10,000 lb. Front Axle Code 10AG00 or 12,000 lb. Front Axle Code 10AE00; For on-hwy. service only</i>) (<i>Req. Garlock bushings Code 13A300 when used w/ABS brakes</i>)	-17	327.00	O	O
13AV00-CF	— Rear, Single Axle (<i>N.A. for severe duty</i>)	-40	335.00	O	
13AV00-CG	— Rear, Tandem Axle (<i>N.A. for severe duty</i>)	-80	727.00		O
	Hubs, High Tensile Ferrous (<i>Avail. for on-hwy. service only</i>)				
13HW00-AC	— Front (<i>Avail. w/10,000 lb. Front Axle Code 10AG00 or 12,000 lb. Front Axle Code 10AE00</i>)	-17	287.00	O	O
13HX00-AE	— Rear, Single Axle	-30	287.00	O	
13HX00-AF	— Rear, Tandem Axle (<i>Avail. w/40,000 lb. Rear Axle only</i>)	-60	573.00		O
STD.	Magnetic Traps, Rear Axle — Drain & Fill Plugs (<i>Standard</i>)	—	—	S	S
13AB00-BP	Shock Absorbers, Front — Double Acting Telescopic (<i>Incl. w/taper-leaf springs</i>)	25	115.00	O	O
13BT00	Steering, Power — Integral, TRW TAS-65 Gear (<i>Standard</i>)	—	—	S	S
	Synthetic Lube — Mobil 75W-90				
	Single Rear Axle				
13F300-AK	23,000 lb. cap.	0	123.00	O	
	Tandem Rear Axle				
13F300-AD	40,000 lb. cap.	0	193.00		O
13F300-AP	46,000 lb. cap.	0	257.00		O
13F200-AB	Wheel Lube, Front Axle (<i>Req. wet type wheel seal Code 13H600</i>)	0	31.00	O	O
	Wheels Seals — Front (<i>See Component Information Data Book for details</i>)				
13H700	Grease Type (<i>Standard</i>)	—	—	S	S
13H600-AA	Wet Type, Oil, Unitized	2	28.00	O	O
	Wheels Seals — Rear (<i>See Component Information Data Book for details</i>)				
STD.	Wet Type, C.R. "Scotseal", Unitized (<i>Standard</i>)	—	—	S	S
	Wet Type, Stemco "Grit-Guard", Two Piece				
13A000-BY	— Single Axle	1	23.00	O	
13A000-B0	— Tandem Axle	3	44.00		O

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	16 — BRAKES, SERVICE				
16AW00	Brakes, Front, Air — Cam Type — Front — 15"x4" Meritor Q Plus (Incl. w/10,000 lb. Front Axle Code 10AG00, 12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00) (Standard)	—	—	S	S
16A100-BD	— Front — 16-1/2"x5" Meritor Q Plus (Avail. w/12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00 only; N.A. w/alum. hubs, high tensile hubs or centrifuse brake drums)	30	123.00	O	O
16A000	— Rear — 16-1/2"x7" Meritor Q Plus (Standard)	—	—	S	S
	19 — BRAKE EQUIPMENT				
19MF00	ABS, Antilock Brake System — Full Vehicle, Four Channel — Incl. wheel-end sensing (Standard)	—	—	S	S
19FC00	Air Compressor — 13.2 CFM, Water Cooled, Bendix Tu-Flo 550 (Standard)	—	—	S	S
19FC00-BV	— 13.2 CFM, Water Cooled, Bendix Tu-Flo 550 (Avail. w/Cummins eng.)	0	264.00	O	O
19FD00-A9	— 16.5 CFM, Water Cooled, Bendix Tu-Flo 750 — Avail. w/ Cat. or DDC-60 eng. only	14	316.00	O	O
19FD00-BA	— Avail. w/ Cummins eng. only	0	656.00	O	O
STD.	Air Dryer — None (Standard)	—	—	S	S
19A700-BP	Air Dryer, Heated — Bendix AD-9 (Mounted on L.H. frame rail, aft of front wheelwell)	27	356.00	O	O
19NF00-AC	Air Dryer, Heated — Bendix, AD-IP (System Guard, Integral Purge) (Mounted on L.H. frame rail, aft of front wheelwell)	34	356.00	O	O
	Air Reservoir Tanks				
19NG00-AC	Single Axle Lightweight, Aluminum (Painted Black)	-30	359.00	O	
19NL00	Steel (Standard)	—	—	S	
	Tandem Axle				
19NG00-AL	Lightweight, Aluminum (Painted Black) — N.A. w/ between rails battery box or dual horiz. mufflers	-30	359.00		O
19NG00-AE	— Use w/ between rails battery box only	-30	359.00		O
19NG00-AG	— Use w/ dual horiz. mufflers only	-30	359.00		O
	Steel				
19NL00	— N.A. w/ between rails battery box or dual horiz. mufflers (Standard)	—	—		S
19NL00-AA	— Use w/ between rails battery box only	0	NC		O
19NL00-AC	— Use w/ dual horiz. mufflers only	0	NC		O
19QA00-AB	Brake Control Valve, Rear Brakes, Hand Operated (For truck use only)	2	121.00	O	O
19BV00-AB	Brake Control Valve, Trailer, Hand Operated — DELETE (For trailer towing pkg. Code 19NH00 or tractor pkg. only)	-2	CR 15.00	O	O
	Brake Dust Shields				
19JE00-BE	Single Axle — Use w/ on-hwy. applications	12	27.00	O	
19JE00-BM	— Required w/ on-off hwy. or severe duty applications	12	NC	O	
	Tandem Rear Axle				
19JE00-BF	— Use w/ on-hwy. applications	19	53.00		O
19JE00-BN	— Required w/ on-off hwy. or severe duty applications	19	NC		O
STD.	Drain Cocks, Manual (Standard)	—	—	S	S
19NM00-AB	Drain Cocks, Manual w/ Lanyard Cable (In lieu of manual drain cocks)	1	23.00	O	O
19AL00-BT	Moisture Ejectors, Automatic, Non-Heated — Bendix, DV-2 (In lieu of manual drain cocks)	1	49.00	O	O
19AV00-AE	Moisture Ejectors, Automatic, Heated — Bendix, DV-2 (In lieu of manual drain cocks)	1	79.00	O	O

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	19 — BRAKE EQUIPMENT (Continued)				
19NY00	Parking Brake, Spring-Set Rear Axle — Maxi II — Rear, Single Axle — Two-Wheel (<i>Standard</i>)	—	—	S	
19N000	— Rear, Tandem Axle — Four-Wheel (<i>Standard w/ truck</i>)	—	—		S
19N000-AC	— Rear, Tandem Axle — Four-Wheel (<i>Avail. w/tractor only</i>)	0	NC		0
19N100-AD	Parking Brake, Spring-Set Rear Axle — MGM (<i>In lieu of Maxi II</i>) — Rear, Single Axle — Two-Wheel	-20	NC	0	
19N100-AG	— Rear, Tandem Axle — Two-Wheel (<i>Avail. w/tractor only</i>)	-20	NC		0
19N200-AC	— Rear, Tandem Axle — Four-Wheel (<i>Avail. w/truck only</i>)	-40	NC		0
19N200-AG	— Rear, Tandem Axle — Four-Wheel (<i>Avail. w/tractor only</i>)	-40	NC		0
STD.	Slack Adjusters, Front & Rear — 5.5" Automatic, Gunite (<i>Standard</i>)	—	—	S	S
19QG00-AC	Traction Control, Automatic (<i>Req. ABS brake system</i>) (<i>N.A. w/Cat. 3306 eng.</i>) — Single Rear Axle	0	751.00	0	
19QG00-AA	— Tandem Rear Axle (<i>Incl. four channel, six sensor ABS</i>)	1	751.00		0
19NH00-AB	Trailer Towing Pkg. — Truck w/ Trailer (<i>Air & elec. lines to end of frame</i>) (<i>Incl. tractor protection control valve & hand operated trailer brake control valve; Req. min. 177" wb; Avail. w/outside frame rail taillight mounting Code 275600 and truck w/trailer application Code AAAD00 only</i>) (<i>N.A. w/any tractor pkg. or single horiz. muffler/dual vert. exhaust outlet stacks Code 32F100/32F200</i>) (<i>N.A. in comb. w/Cat. C10, C12, 3306, Cum. N14+ and a HT or HD auto. trans.</i>)	20	443.00	0	0
	20 — TRACTOR EQUIPMENT (See Component Information Data Book for complete content)				
	TRACTOR PACKAGE (<i>Incl. tractor protection control valve, hand operated trailer brake control valve, rear bobtail proportioning valve [in lieu of std. R-12 relay valve], tapered frame ends exc. w/reinforced frames, signal-stat non-cancelling turn signal switch, fixed trailer hook-up light with I/P switch w/"On" indicator, 102" mirror arms Code 23BP00, solar tint rear cab window Code 23YL00 & mud flap brackets</i>) (<i>N.A. in comb. w/Cat. C10, C12, 3306, Cum. N14+ and a HT or HD auto. trans.</i>) Single Axle (<i>Incl. 21,000 lb. multi-leaf rear susp. Code 47J700</i>) (<i>Deletes std. aux. susp. Code 47KH00</i>) — On-Highway (<i>Requires focal engine mounts Code 373100 w/10,000 lb. Front Axle code 10AG00, 12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00</i>) — w/ 10' Air & Electrical Tractor/ Trailer Lines (<i>N.A. w/unipac tractor pkg. Code 20GE00</i>)	-30	459.00	0	
20AB00-B3	— w/ 12' Air & Electrical Tractor/ Trailer Lines (<i>N.A. w/unipac tractor pkg. Code 20GE00</i>)	-30	471.00	0	
20AC00-BR	— w/ 12' Coiled Air & Electrical Tractor/ Trailer Lines (<i>N.A. w/unipac tractor pkg. Code 20GE00</i>)	-29	480.00	0	
20AE00-B9	— Unipac Tractor Package (<i>w/12' coiled air & electric lines; Mtd to L.H. lower back panel</i>) (<i>Incl. single fixed focus trailer hook-up light in lieu of the hook-up light included w/tractor pkg.</i>)	-28	524.00	0	
20GE00-AY	— On-Off Highway (<i>Incl. std. compression type engine mounts</i>) — w/ 10' Air & Electrical Tractor/ Trailer Lines (<i>N.A. w/unipac tractor pkg. Code 20GE00</i>)	-30	459.00	0	
20AB00-BR	— w/ 12' Air & Electrical Tractor/ Trailer Lines (<i>N.A. w/unipac tractor pkg. Code 20GE00</i>)	-30	471.00	0	
20AC00-BD	— w/ 12' Coiled Air & Electrical Tractor/ Trailer Lines (<i>N.A. w/unipac tractor pkg. Code 20GE00</i>)	-29	480.00	0	
20AE00-BX	— Unipac Tractor Package (<i>w/12' coiled air & electric lines; Mtd to L.H. lower back panel</i>) (<i>Incl. single fixed focus trailer hook-up light in lieu of the hook-up light incl. w/tractor pkg.</i>)	-28	524.00	0	
20GE00-AJ					

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	20 — TRACTOR EQUIPMENT (See Component Information Data Book for complete content) (Continued)				
	Tractor Package (Incl. tractor protection control valve, hand operated trailer brake control valve, rear bobtail proportioning valve [in lieu of std. R-12 relay valve], tapered frame ends exc. w/reinforced frames, signal-stat non-cancelling turn signal switch, fixed trailer hook-up light with I/P switch w/"On" indicator, 102" mirror arms Code 23BP00, solar tint rear cab window Code 23YL00 & mud flap brackets) (N.A. in comb. w/Cat. C10, C12, 3306, Cum. N14+ and a HT or HD auto. trans.) (Continued)				
	Tandem Axle (N.A. w/front frame extension & 249" or 261" wb; N.A. w/front bumper extension & 261" wb)				
20AB00-BY	— On-Highway (Requires focal engine mounts Code 373100 w/10,000 lb. Front Axle Code 10AG00, 12,000 lb. Front Axle Code 10AE00 or 13,000 lb. Front Axle Code 10AM00; Incl. two-wheel spring-set parking brakes Maxi II)				
	— w/ 10' Air & Electrical Tractor/Trailer Lines (N.A. w/unipac tractor pkg. Code 20GE00).....	35	661.00		0
20AC00-BL	— w/ 12' Air & Electrical Tractor/Trailer Lines (N.A. w/unipac tractor pkg. Code 20GE00).....	35	671.00		0
20AE00-B5	— w/ 12' Coiled Air & Electrical Tractor/Trailer Lines (N.A. w/unipac tractor pkg. Code 20GE00).....	36	681.00		0
20GE00-AT	— Unipac Tractor Package (w/12' coiled air & electric lines; Mtd to L.H. lower back panel) (Incl. single fixed focus trailer hook-up light in lieu of the hook-up light included w/tractor pkg.).....	37	725.00		0
	— On-Off Highway (Incl. std. compression type engine mounts; Incl. two-wheel spring-set parking brakes Maxi II)				
20AB00-BT	— w/ 10' Air & Electrical Tractor/Trailer Lines (N.A. w/unipac tractor pkg. Code 20GE00).....	35	519.00		0
20AC00-BE	— w/ 12' Air & Electrical Tractor/Trailer Lines (N.A. w/unipac tractor pkg. Code 20GE00).....	35	528.00		0
20AE00-BY	— w/ 12' Coiled Air & Electrical Tractor/Trailer Lines (N.A. w/unipac tractor pkg. Code 20GE00).....	36	539.00		0
20GE00-AK	— Unipac Tractor Package (w/12' coiled air & electric lines; Mtd to L.H. lower back panel) (Incl. single fixed focus trailer hook-up light in lieu of the hook-up light incl. w/tractor pkg.).....	37	583.00		0
	22 — CAB				
	CAB, STEEL (See Component Information Data Book for complete details)				
	— Value Interior Trim (Incl. vinyl seat trim Code 25AAD8, hardboard headliner & lower back panel, L.H. cowl side panel w/integral footrest, black vinyl floor mat, steering column shroud, 18" steering wheel, padded vinyl sun visors w/ticket strap, scuff plates, L.H./R.H. metal assist handles, coat hook, center mounted dome lamp and L.H./R.H. door courtesy lamps & storage pockets)				
22BJ00	— Medium Graphite Interior Trim Color (Standard)	—	—	S	S
	— Custom Interior Trim (Incl. knit vinyl seat trim Code 25AAD7, hardboard headliner & lower back panel, back panel storage net, L.H. cowl side panel w/integral footrest, black vinyl floor mat, vinyl trimmed doors w/map pockets, L.H./R.H. padded armrests, steering column shroud, 18" steering wheel, padded vinyl sun visors w/ticket strap, scuff plates, L.H./R.H. molded assist handles, two coat hooks, center mounted dome lamp, L.H./R.H. door courtesy lamps & storage pockets)				
22BW00-AB	— Medium Graphite Interior Trim Color	7	203.00	0	0
	— Prestige Interior Trim (Incl. polyknit vinyl (cloth) seat trim Code 25AAD9, cloth trimmed full headliner & carpet trimmed back panel w/storage net, L.H./R.H. cowl side panels w/integral footrest, black vinyl floor mat, vinyl trimmed "B" pillars, Polyknit trimmed doors w/map pockets, "A" pillar garnish molding, L.H./R.H. padded armrests, steering column shroud, 18" steering wheel, padded vinyl sun visors w/storage pouch, scuff plates, L.H./R.H. molded assist handles, two coat hooks, center mounted dome lamp and L.H./R.H. door courtesy lamps & storage pockets)				
22B000-AB	— Medium Graphite Interior Trim Color	10	339.00	0	0
22B100-AB	— Medium Mocha Interior Trim Color	10	339.00	0	0
22B200-AB	— Cordovan Interior Trim Color	10	339.00	0	0

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	22 — CAB (Continued)				
AGAH00-AB	APPLIED GRAPHICS, ACCENT Continental Fuchsia	0	487.00	0	0
AGAK00-AB	Silver Metallic	0	487.00	0	0
AGAF00-AB	Tan	0	487.00	0	0
AGAJ00-AB	Teal	0	487.00	0	0
AGAG00-AB	Toreador Red	0	487.00	0	0
	23 — CAB EQUIPMENT/ EXTERIOR				
23YG00-AC	Aerodynamic Equipment Full Pkg. (Incl. roof fairing Code 23YF00 & side extenders Code 31F00) (Avail. w/on-hwy. tractor only) (Incl. integral marker lights in lieu of std. cab mounted & cab side extender pkg. Code 231F00) (Exhaust heat shields are deleted) (Req. Special Paint Options 40 & 42)	293	1119.00	0	0
23YF00-AC	Roof Fairing Pkg. (On-hwy. only) (Incl. integral marker lights in lieu of std. cab mounted) (Req. Special Paint Option 40) (N.A. w/side extender pkg. Code 231F00 or prep. pkg. Code 23E100)	109	561.00	0	0
23E100-A5	Prep Pkg. — Reinforcements Only (For local installation of roof fairing) (On-hwy. only)	1	231.00	0	0
231F00-AD	Side Extenders Pkg. (Avail. w/on-hwy. tractor only) (Req. Special Paint Option 42) (N.A. w/roof fairing pkg. Code 23YF00 or prep. pkg. Code 23E100) (Exhaust heat shields are deleted)	68	353.00	0	0
	Back-of-Cab Access Pkg. (Avail. for tractor applications only; Incl. steps and grab handles) (N.A. w/cab w/L.H. 4-battery system w/electronic engines) (N.A. w/153" wb thru 165" wb w/60" tandem susp. in comb. w/all forward mtd. fuel tanks) (N.A. w/153" thru 177" w/Airliner tandem susp. in comb. w/all forward mtd. fuel tanks) (N.A. w/153" wb w/tandem axle in comb. w/rear mtd. L.H. single or dual 75 gal. or w/mixed 75/100 gal. rect. fuel tanks) (N.A. w/153" and 165" wb w/Airliner tandem susp. in comb. w/rear mtd. L.H. single or dual 75 gal. or w/mixed 75/100 gallon fuel tanks) (Refer to Quarter Fender Restriction charts in the Appendix at the end of this model for additional restrictions.)				
23YA00-CP	Avail. w/153" wb (Incl. 18" deck: 1-18" tread plate)	39	347.00	0	0
23YA00-CR	Avail. w/165" wb (Incl. 30" deck: 1-30" tread plate)	40	409.00	0	0
23YA00-CT	Avail. w/177" wb (Incl. 42" deck: 1-18" & 1-24" tread plate)	42	471.00	0	0
23YA00-CV	Avail. w/189" wb (Incl. 54" deck: 1-24" & 1-30" tread plate)	56	535.00	0	0
23YA00-CW	Avail. w/207" wb (Incl. 72" deck: 1-18", 1-24", & 1-30" tread plate)	70	627.00	0	0
23YA00-CX	Avail. w/213" wb (Incl. 78" deck: 1-18" & 2-30" tread plates)	73	659.00	0	0
23YA00-CY	Avail. w/225" thru 261" wb (Incl. 90" deck: 3-30" tread plates)	70	720.00	0	0
STD.	Cab Exterior, Standard Level (Standard)	—	—	S	S
STD.	Cab Mounts, Front — Trunnion (Standard)	—	—	S	S
STD.	Cab Suspension, Rear — Conventional Rubber (Standard)	—	—	S	S
23LT00-AC	— Hydromount (Avail. w/tractor or on-highway truck only)	2	95.00	S	S
STD.	Glass Door Vent Windows, Solar Tinted L.H./ R.H. (Two way w/locking latch) (Standard)	—	—	S	S
23LX00-AC	Rear Window, DELETE (Avail. w/tractor only)	-15	CR 43.00	0	0
23YL00-AB	Rear Window, Fixed, Solar Tinted (Avail. w/truck only; Incl. w/tractor)	15	43.00	0	0
STD.	Rear Window, None (Standard)	—	—	S	S
STD.	Windshield & Side Glass — Solar Tinted (Standard)	—	—	S	S
232H00	Grille, Hood Mounted (Painted Body Color) (Standard)	—	—	S	S
233C00-AB	Headlamp Bezel, Bright	0	31.00	0	0
232R00-AB	Hood, Accent Bar — Bright	3	35.00	0	0
STD	— Painted Body Color (Standard)	—	—	S	S

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	23 — CAB EQUIPMENT/ EXTERIOR (Continued)				
23AB00	Hood, Forward Tilting Front End	—	—	S	S
232000-AE	— Without Engine Service Access Door (Standard)	—	—	S	S
232600-AB	— With Full Butterfly Opening (Req. oil fill & dipstick, serviceability enhanced Code 373900)	N/A	629.00	0	0
23KH00	— With Ready-Line Access Door, R.H. Butterfly Opening Hood (Oil check and fill) (N.A. w/full butterfly opening Code 232000) (Req. oil fill & dipstick, serviceability enhanced Code 373900)	12	417.00	0	0
23CV00-BL	Horn, Single — Electric (Standard)	—	—	S	S
23CW00-BP	Horns, Dual	—	—	S	S
23CX00-A7	— Electric	1	15.00	0	0
23YX00	— Air, Single Base (N.A. w/Hadley air horns Code 23CX00)	3	79.00	0	0
23YY00-AB	— Air, Hadley Rectangular, Dual Base (N.A. w/single base air horns Code 23CW00; Roof fairing pkg. Code 23YF00 or cab prep. pkg. Code 23E100)	11	99.00	0	0
233L00-AB	Mirrors, Dual, Western (Auxiliary convex mirrors are NOT included)	—	—	S	S
23Y000-AC	— Painted Med. Titanium (Standard)	—	—	S	S
23Y200-AC	— Bright (1)	0	73.00	0	0
233K00-AB	— Bright, Heated (Incl. I/P switch w/"On" indicator) (1)	1	153.00	0	0
233J00-AB	— Bright, Lighted (1)	1	104.00	0	0
234000-AC	— Bright, Lighted & Heated (Incl. I/P switch w/"On" indicator) (1)	1	184.00	0	0
233Y00-AB	— Bright, Motorized, Heated (Incl. I/P switch w/"On" indicator) (1)	8	891.00	0	0
233Z00-AB	— Bright, Motorized, Lighted & Heated (Incl. I/P switch w/"On" indicator) (1)	9	921.00	0	0
233A00-AC	— Bright, Motorized-R.H., Manual-L.H., Heated (Incl. I/P switch w/"On" indicator) (1)	5	660.00	0	0
233B00	— Bright, Motorized-R.H., Manual-L.H., Lighted & Heated (Incl. I/P switch w/"On" indicator) (1)	5	691.00	0	0
233C00	Mirrors, Auxiliary Convex (Painted aux. w/painted western mirrors only & bright aux. w/bright western mirrors only exc. "Sweet Spot" which may be used with either painted or bright western mirrors)	—	—	S	S
233D00	— 5.5" Dia., Bottom Mounted	—	—	S	S
233E00	— w/ Painted Mirrors, R.H. only (Standard)	1	11.00	0	0
233F00	— w/ Painted Mirrors, L.H. & R.H.	1	11.00	0	0
233G00	— w/ Bright Mirrors, 2	1	11.00	0	0
233H00	4 — 5.5" Dia., 2 Top & 2 Bottom Mounted	—	—	S	S
233I00	— w/ Painted Mirrors	1	36.00	0	0
233J00	— w/ Bright Mirrors	1	36.00	0	0
233K00	2 — 8" Dia., Bottom Mounted (8-7/8" actual size)	—	—	S	S
233L00	— w/ Painted Mirrors	2	17.00	0	0
233M00	— w/ Bright Mirrors	2	17.00	0	0
233N00	4 — 8" Dia., 2 Top & 2 Bottom Mounted (8-7/8" actual size)	—	—	S	S
233O00	— w/ Painted Mirrors	5	51.00	0	0
233P00	— w/ Bright Mirrors	5	51.00	0	0
233Q00	2 — "Sweet Spot" (Painted Black)	1	79.00	0	0
233R00	Dual — 8" Dia., Bright Head & Mounting Arms, Fender Mounted, 3-Pt. Mounting (8-7/8" actual size)	8	123.00	0	0
233S00	Single R.H. — 8" Dia., Bright Head & Mounting Arms, Fender Mounted, 3-Pt. Mounting (8-7/8" actual size)	4	61.00	0	0
233T00	Mirrors, Delete Aux. Convex	-1	CR 11.00	0	0
233U00	Mirror Arms	—	—	S	S
233V00	— 96" (Standard w/truck)	—	—	S	S
233W00	— 96" (Avail. w/tractor only)	-1	CR 12.00	0	0
233X00	— 102" (Avail. w/truck only; Incl. w/tractor)	1	12.00	0	0
233Y00	Splash Guard, Wheel Lip — Rubber (Req'd. w/385 or 425 floatation tires) (Avail. w/all others)	9	116.00	0	0
233Z00	Sun Visor, Fiberglass, Exterior (N.A. w/full aero pkg. Code 23YG00, roof fairing pkg. Code 23YF00 or aero prep pkg. Code 23E100) (Req. Special Paint Option 43)	13	133.00	0	0
STD.	Windshield Wipers, Interval, Electric (w/lift-off "Wet Arm" windshield wiper arms and integral nozzles, electric washer pump & 8-Liter reservoir) (Standard)	—	—	S	S

(1) N.A. w/painted aux. convex mirrors exc. "Sweet Spot".

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
24 — CAB EQUIPMENT/ INTERIOR					
24AJ00-BM	Air Conditioning, Integral w/ Heater (Req. standard Kysor "On-Off" fan clutch w/Cat. 3306 eng. Code 30TG00) *	54	685.00	0	0
24AL00	Cigar Lighter I/P Mounted (Standard)	—	—	S	S
	Console, Storage				
24LY00	— Engine Cover Mounted (Incl. ash tray & cup holder) (Standard)	—	—	S	S
24K700-AC	— Header Mounted (Avail. w/Prestige interior trim only; Incl. header mounted single CB hot post & ground).....	5	207.00	0	0
24GC00-AC	Door Locks, Electric L.H. & R.H. (N.A. w/Value interior trim Code 22BJ00)	0	113.00	0	0
STD.	Door Locks, Manual L.H. & R.H. (Standard)	—	—	S	S
24B400-BW	Export Decal (For Export only)	0	NC	0	0
24J600-AC	Filter Pkg., Environmental (Incl. fresh air inlet dust filter & recirculated air filter)	2	44.00	0	0
STD.	Floor Mat, Full Vinyl, Med. Dark Graphite (Standard)	—	—	S	S
STD.	Heater, Defroster/ Demister and Fresh Air Ventilation (Standard)	—	—	S	S
STD.	Lamp, Dome, Center Mounted (Standard)	—	—	S	S
24J900-AC	Lamp, Dome & Reading, Center Mounted (Avail. w/Prestige interior trim only)	0	29.00	0	0
24LB00-AB	Lamp, Reading, Over-Door (2) (Avail. w/Prestige interior trim only)	0	59.00	0	0
	Map Pocket, L.H. Door				
24AM00-AL	— Avail. w/ Value interior trim Code 22BJ00 only (Incl. w/Custom or Prestige interior trim)	1	11.00	0	0
	Radio, CB				
24KA00-AC	Antenna, Dual — Mirror Mounted (Incl. single CB hot post & ground mounted in either I/P or header console Code 24K700)	1	167.00	0	0
	Hot Post & Ground				
24BF00-AC	— Dual, I/P Mounted (N.A. w/header mounted storage console Code 24K700)	1	31.00	0	0
24AH00-A9	— Single, I/P Mounted (Avail. with or without header mounted storage console Code 24K700).....	0	15.00	0	0
	Radio, Electronic (Incl. digital clock)				
	Premium Sound (Incl. power amplifier & four speakers)				
24KB00-AC	— AM/FM Stereo w/ Cassette Tape Deck	12	707.00	0	0
	Standard Sound (Incl. two speakers)				
24AF00-CH	— AM/FM Stereo	10	463.00	0	0
24H200-AB	— AM/FM Stereo w/ Cassette Tape Deck & Weather Band (Incl. dual display, scan & alarm clock).....	11	537.00	0	0
STD.	Radio, None (Standard)	—	—	S	S
24KC00-AC	Radio Prep. Pkg. (Incl. antenna, antenna lead, two speakers, bezel, mounting bracket & hot lead; Wired for AM/FM Stereo radio)	2	104.00	0	0
	Steering Column, Adjustable				
24KD00-AC	— Tilt Only	5	319.00	0	0
24KE00-AB	— Tilt and Telescopic	7	443.00	0	0
STD.	Steering Column, Stationary (Standard)	—	—	S	S
	Steering Wheel				
24B500	— 18" Dia. (Standard)	—	—	S	S
24KF00-AC	— 18" Dia., Leather Wrapped	0	44.00	0	0
24AP00-CB	— 21" Dia. (NOTE: 21" wheel reduces steering effort approximately 20%. Drivers will experience a lighter road feel than with an 18" wheel) (N.A. w/electronic engines with speed/cruise control or PTO)	2	9.00	0	0
STD.	Sun Visors, Single, Vinyl — L.H. & R.H. (Incl. ticket strap) (Standard)	—	—	S	S
	Sun Visors, Two Way, Vinyl, Integral Side — L.H. & R.H.				
24KG00-AD	— w/ Value or Custom interior trim (Incl. ticket strap)	0	52.00	0	0
24KG00-AE	— w/ Prestige interior trim (Incl. storage pouch)	0	59.00	0	0

* Price excludes Federal Excise Tax of \$100.00 (cdn.). Applies for Canada only.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	24 — CAB EQUIPMENT/ INTERIOR (Continued)				
24KJ00-AC	Window Control — Electric — R.H. Side w/ L.H. Control (Avail. w/Value interior trim only)	4	104.00	0	0
24KK00-AC	— R.H. & L.H. Sides w/ Dual Control (Avail. w/Custom or Prestige interior trim only)	8	215.00	0	0
STD.	Window Control — Manual (Side Windows) (Standard)	—	—	S	S
24KL00-AF	Window, Observation — R.H. Door (Incl. wide angle Fresnel lens; R.H. side window drop is restricted) (Deletes R.H. door mtd. map pocket w/Custom or Prestige interior trim)	2	144.00	0	0
	25 — SEATING				
	(Seats are color coordinated to cab trim level. Passenger seat matches driver seat in appearance and material; All seats include seat belts)				
25AAC0-AC	Bostrom, Mid-Back, Talladega (Incl. Fore-Aft Isolator) Driver, Air-T915, Air Suspension	-33	31.00	0	0
25AAC9-AC	Passenger, Air-T915, Air Suspension	72	668.00	0	0
	Bostrom, Hi-Back, Talladega (Incl. Fore-Aft Isolator) (N.A. w/armrests w/auto. trans.)				
25AAC4-AD	Driver, Air-T915, Air Suspension w/ Value or Custom cab interior trim	-33	313.00	0	0
25AAC4-AK	w/ Prestige cab interior trim	-33	313.00	0	0
	Passenger, Air-T915, Air Suspension				
25AADD-AD	w/ Value or Custom cab interior trim	71	680.00	0	0
25AADD-AK	w/ Prestige cab interior trim	71	680.00	0	0
	National, Mid-Back (Incl. Fore-Aft Isolator unless noted otherwise)				
25AACW-AB	Driver, Fixed Base, Less Isolator	-49	CR 127.00	0	0
25AACX-AC	Driver, Fixed Base	-47	CR 115.00	0	0
25AACY	Driver, Air Suspension (Standard)	—	—	S	S
25AAC5-AB	Passenger, Fixed Base "Economy" — Non-Adj., Less Isolator	56	320.00	0	0
25AAC6-AB	Passenger, Fixed Base, Less Isolator	56	376.00	0	0
25AAC7-AB	Passenger, Fixed Base	56	439.00	0	0
25AAC8-AC	Passenger, Air Suspension	78	635.00	0	0
	National, Hi-Back (Incl. Fore-Aft Isolator)				
25AAC1-AD	Driver, Fixed Base	-44	CR 133.00	0	0
25AAC2-AD	Driver, Air Suspension	6	12.00	0	0
25AADA-AC	Passenger, Fixed Base	57	439.00	0	0
25AADB-AD	Passenger, Air Suspension	79	648.00	0	0
	OTHER SEATING EQUIPMENT				
	Armrests, Dual (Avail. w/Mid-Back & Hi-Back seats; N.A. w/pedestal mtd. auto. trans. shift control)				
25AADJ-AC	Driver	5	59.00	0	0
25AADK-AC	Passenger (N.A. w/individual seat Code 25AAC5 or two passenger seat Code 25AADF)	5	59.00	0	0
	Base Cover, Air Suspension (Avail. w/all National air suspension seats; Incl. w/Bostrom Hi-Back seats Codes 25AAC4 & 25AADD w/Prestige interior trim; N.A. w/Bostrom Mid-Back seat Codes 25AAC0 & 25AAC9)				
25AAEF-AC	Driver Seat	2	51.00	0	0
25AAEG-AC	Passenger Seat	2	51.00	0	0
	Belts, Seat — Lap and Shoulder, 3-pt. mounting w/ Adjustable D-Ring				
25AAD3	Driver Only (Standard)	—	—	S	S
25AAT0-AB	Passenger Only (Incl. w/passenger seat option)	0	NC	0	0
	Cushion, Seat, Heated — Electric (Avail. w/National air susp. seats only; N.A. w/swivel base)				
25AADN-AC	Driver Seat	1	87.00	0	0
25AADP-AC	Passenger Seat	1	87.00	0	0
	Headrest, Four-Way Adjustable (Avail. w/mid-back seats only)				
25AADR-AC	Driver Seat	2	133.00	0	0
25AADT-AC	Passenger Seat (N.A. w/seat Code 25AAC5 or 25AAC6)	2	133.00	0	0

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	OTHER SEATING EQUIPMENT (Continued)				
25AADV-AC	Lumbar Support, Air (Incl. w/all National air suspension seats; Incl. w/Bostrom Hi-Back seats Codes 25AAC4 & 25AADD w/Prestige interior trim; N.A. w/Bostrom Mid-Back seats Codes 25AAC0 & 25AAC9)	1	24.00	0	0
25AADW-AC	Driver Seat	1	24.00	0	0
	Passenger Seat (N.A. w/seat Code 25AAC5)	1	24.00	0	0
25AADX-AC	Map Pocket, Back of Seat (Incl. & avail. w/Bostrom Hi-Back seats Codes 25AAC4 & 25AADD w/Prestige interior trim only; N.A. w/Bostrom Mid-Back seats Codes 25AAC0 & 25AAC9; N.A. w/"Less Isolator" seats Codes 25AACW, 25AAC5 or 25AAC6)	1	7.00	0	0
25AADY-AC	Driver Seat	1	7.00	0	0
	Passenger Seat	1	7.00	0	0
25AAD0-AC	Swivel Base, Seat, Adjustable (Avail. w/National air suspension seats; Avail. w/Bostrom Hi-Back seats Codes 25AAC4 & 25AADD w/Prestige interior trim; N.A. w/Bostrom Mid-Back seats Codes 25AAC0 & 25AAC9; N.A. w/heated cushion Codes 25AADN or 25AADP)	17	61.00	0	0
25AAD1-AC	Driver Seat (N.A. w/HT-Series auto. trans.)	17	61.00	0	0
	Passenger Seat	17	61.00	0	0
26 — INSTRUMENTS/ GAUGES/ SWITCHES/ WARNING DEVICES					
26MR00	Air Cleaner Restriction Indicator	—	—	S	S
26MT00-AC	Air Cleaner Mounted (Standard)	—	—	S	S
26M600-AA	I/P Mounted (N.A. in comb. w/digital diagnostic message ctr. Code 26M600 & I/P mtd. P/B shift console Code 57C400)	0	23.00	0	0
	Digital Diagnostic Message Center (N.A. when I/P mtd. push button console Code 57C400 is used in comb. with I/P mtd. air cleaner restriction gauge Code 26MT00 or brake application air press. gauge Code 26MP00) (N.A. w/Cat. 3306 eng. Code 30TG00)	1	671.00	0	0
26MP00-AC	Gauges				
	— Brake Application Air Pressure (N.A. in comb. w/message ctr. Code 26M600 & I/P mtd. PB shift control Code 57C400)	0	63.00	0	0
26NN00	— Electronic Cluster (Incl. speedometer, tachometer, fuel level, coolant temp., voltmeter, oil press. & dual air brake press.) (Standard)	—	—	S	S
26AM00-A7	— Hour Meter (Located in tachometer)	1	48.00	0	0
26NP00-AB	— Individual Round (In lieu of std. electronic cluster) (Incl. speedometer, tachometer, fuel level, coolant temp., voltmeter, oil press. & dual air brake press.)	0	172.00	0	0
26M900-AA	— Pyrometer, Exhaust Gas (N.A. w/digital message ctr. Code 26M600)	1	135.00	0	0
26NA00-AA	— Temperature, Engine Oil, Electric (N.A. w/digital message ctr. Code 26M600)	1	44.00	0	0
	— Temperature, Rear Axle Lube (N.A. w/digital message ctr. Code 26M600) (N.A. in comb. with I/P mtd. push button console Code 57C400)	1	40.00	0	
26AN00-AX	— w/ single rear axle	2	81.00		0
26AN00-A1	— w/ tandem rear axle	2	24.00	0	0
26AP00-AX	— Temperature, Transmission Oil (N.A. w/digital message ctr. Code 26M600) (N.A. w/any auto. trans.)	2	24.00	0	0
26M700	Gauge Control Panel, Flat Gauge Insert — R.H. (Standard)	—	—	S	S
STD.	Parking Brake Control, I/P Mounted (Standard)	—	—	S	S
26AX00-BW	Speedometer, Metric (N.A. in U.S.)	0	NC	0	0
26MY00	Turn Signal Switch	—	—	S	S
	Signal Stat, Non-Cancelling (Standard)	—	—	S	S
STD.	Warning Lights	—	—	S	S
STD.	— ABS Anti-lock System (Standard)	—	—	S	S
STD.	— High Beam Indicator (Standard)	—	—	S	S
STD.	— Turn Signal Indicators (Standard)	—	—	S	S
STD.	Warning Light & Buzzer — Air Brakes (Standard)	—	—	S	S
26M500-AC	Warning Lights & Chime (Low oil press., low coolant level, high coolant temp. and high engine oil temp.) (Avail. w/Cat. 3306 eng. Code 30TG00 only; Incl. w/engine warning & shutdown system Code 374H00)	0	51.00	0	0

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	27 — ELECTRICAL				
STD.	Canadian Daytime Running Lights (<i>Standard in Canada only</i>)	—	—	S	S
270P00-BK	Daytime Running Lights (<i>N.A. in Canada</i>)	0	53.00	O	O
276H00-AB	Circuits, Customer Access				
STD.	— Auxiliary Circuits Pkg.	1	51.00	O	O
	— I/P Fuse Panel Pkg. (<i>Standard</i>)	—	—	S	S
27AA80-AB	— Access Circuits Box	1	24.00	O	O
27AA70-AB	— Engine Compartment	1	24.00	O	O
STD.	— Rear of Chassis (<i>N.A. w/tractor applications</i>)	—	—	S	S
	— Access Circuits Connector (<i>Engine compt., rear of cab & rear of chassis w/truck applications; Engine compt. & rear of cab only w/tractor applications</i>) (<i>Standard</i>)	—	—	S	S
276L00-AC	— Switch Pkg., Auxiliary	1	23.00	O	O
27AL00-AF	Circuit Protectors				
STD.	Breakers, Automatic Reset	N/A	283.00	O	O
STD.	Fuses (<i>Standard</i>)	—	—	S	S
27AC00-BB	Flasher, Emergency (<i>Standard</i>)	—	—	S	S
STD.	Lamps, Turn Signal, Fender Mounted, Supplemental (<i>In addition to std.</i>)	1	59.00	O	O
STD.	Lamps, Turn Signal & Side Marker Combination & Rear/Side Facing (<i>Hood Mounted</i>) (<i>Standard</i>)	—	—	S	S
STD.	Lamps, Turn Signal, Rear/Side Facing, Hood Mounted (<i>Standard</i>)	—	—	S	S
27G800-A7	Lights, Auxiliary (<i>Incl. I/P mounted switch</i>) (<i>Mtd. in full width bumper, below bumper w/cut-off bumper Code 59AL00</i>)	5	108.00	O	O
27G700-A7	— Driving Lights (<i>N.A. w/fog lights Code 27G700</i>)	5	108.00	O	O
	— Fog Lights (<i>N.A. w/driving lights Code 27G800</i>)	—	—	S	S
STD.	Lights				
274800-AC	Cab Marker, 5 Lights (<i>N.A. w/full Aero pkg. Code 23YG00, roof fairing pkg. Code 23YF00 or cab prep. pkg. Code 23E100</i>)	—	—	S	S
STD.	— <i>Standard</i>	2	39.00	O	O
STD.	— Premium	—	—	S	S
STD.	Head, Two Rectangular Halogen, Dual Beam (<i>Incl. stalk mounted switch for dimmer and flash to pass</i>) (<i>Standard</i>)	—	—	S	S
STD.	Tail, Two w/Integral Stop, Turn, Backup, and License Plate (<i>Mounted inside frame rails</i>) (<i>Standard</i>)	—	—	S	S
273300-AC	Trailer Hook-Up (<i>Incl. I/P switch w/"On" indicator</i>)				
27AB00-A5	— Aimable (<i>Avail. for tractor in addition to fixed light Code 27AB00 or light included w/unipac tractor pkg. Code 20GE00</i>)	2	31.00	O	O
27AAR0-AB	— Fixed (<i>Avail. for truck applications; Incl. w/tractor</i>)	2	33.00	O	O
STD.	Truck-Lite, Rear Lighting System (<i>In lieu of std.</i>) (<i>N.A. w/trailer towing pkg. Code 19NH00 or tractor ramp rear crossmember Code 40EX00</i>)	1	133.00	O	O
275600-AC	Taillight Mounting				
276R00-AA	— Inside Frame Rails — 21.56" Spacing (<i>N.A. w/Truck-Lite Code 27AAR0</i>) (<i>Standard</i>)	—	—	S	S
	— Outside Frame Rails — 46.07" Spacing (<i>N.A. w/tractor ramp crossmember Code 40EX00 or Truck-Lite Code 27AAR0 or 51" A/L tandem susp. w/60" A/F</i>)	0	19.00	O	O
	— Rear Crossmember (<i>N.A. w/truck or w/truck w/trailer pkg. Code 19NH00, tractor ramp crossmember Code 40EX00 or Truck-Lite Code 27AAR0</i>)	-3	19.00	O	O
	28 — ALTERNATORS				
28CF00-AC	85 amp., 1175 watt				
28CQ00-AA	Delco (26 SI) (1)	5	215.00	O	O
	Leece-Neville (1)	21	197.00	O	O
28B300-BJ	100 amp., 1400 watt				
28CS00	Delco (21 SI)	-8	19.00	O	O
	Leece-Neville (<i>Standard</i>) (1)	—	—	S	S
28B800-AA	115 amp., 1610 watt				
	Leece-Neville (1)	0	37.00	O	O

(1) Not available w/Cat. 3406E or 3306C eng.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	28 — ALTERNATORS (Continued)				
28BL00-AC	130 amp., 1820 watt Delco (21 SI)	-9	111.00	0	0
28CB00-AN	Leece-Neville (1)	1	92.00	0	0
28BM00-AC	145 amp., 2030 watt Delco (21 SI)	-9	151.00	0	0
28CR00-AA	Leece-Neville (1)	1	132.00	0	0
	29 — BATTERIES/ BOXES/ CABLES (Refer to the Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions.)				
29AP00	Battery, Maintenance Free Sterling, 12 Volt — Two, 625 CCA (93 amp.-hr.) (Incl. w/Cat. C-10, C-12 or 3306 eng.) (N.A. w/Cum. N14+, Cat. 3406 or DDC-60 eng.) (Standard)	—	—	S	S
29AG00-BW	— Three, 625 CCA (93 amp.-hr.) (Incl. w/N14+, Cat. 3406 or DDC-60 eng.) (Avail. w/Cat. C-10, C-12 or 3306 eng.)	53	103.00	0	0
29AH00-BR	— Four, 625 CCA (93 amp.-hr.) (N.A. w/electronic engines w/clean CA fuel tanks) — Avail w/Cat. C-10, C-12 or Cat. 3306 eng. only	106	261.00	0	0
29AH00-BT	— Avail w/Cum. N14+, Cat. 3406 or DDC-60 eng. only	53	160.00	0	0
29AJ00-B5	— Two, 625 CCA (96 amp.-hr.) (Cycle Power) (Avail. w/Cat. C-10, C-12 or 3306 eng.) (N.A. w/Cum. N14+, Cat. 3406 or DDC-60 eng.)	6	15.00	0	0
29AK00-CA	— Three, 625 CCA (96 amp.-hr.) (Cycle Power) — Avail w/Cat. C-10, C-12 or Cat. 3306 eng. only	62	123.00	0	0
29AK00-CB	— Avail w/Cum. N14+, Cat. 3406 or DDC-60 eng. only	9	21.00	0	0
29AL00-BR	— Four, 625 CCA (96 amp.-hr.) (N.A. w/electronic engines w/clean CA fuel tanks) — Avail w/Cat. C-10, C-12 or Cat. 3306 eng. only	118	289.00	0	0
29AL00-BT	— Avail w/Cum. N14+, Cat. 3406 or DDC-60 eng. only	65	188.00	0	0
29GM00-BP	— Two, 900 CCA (96 amp.-hr.) — Avail w/Cat. C-10, C-12 or Cat. 3306 eng. only	6	11.00	0	0
29GM00-BR	— Avail w/Cum. N14+, Cat. 3406 or DDC-60 eng. only	-47	CR 91.00	0	0
29GN00-BC	— Three, 900 CCA (96 amp.-hr.) — Avail w/Cat. C-10, C-12 or Cat. 3306 eng. only	62	113.00	0	0
29GN00-BD	— Avail w/Cum. N14+, Cat. 3406 or DDC-60 eng. only	9	11.00	0	0
29KH00-AA	Battery Box, Frame Mounted Aft of Cab, Between Frame Rails (Avail. w/tractor only, 153" thru 207" wb) (Req. min. 165" wb w/52" HAS tandem susp., min. 177" wb w/60" HAS, HFS and all Neway tandem susp.) (Avail. w/walking beam susp. w/177" wb only) (Req. remote battery terminals Code 29KG00 in comb. w/back of cab access pkg. Code 23YA00) (N.A. w/rear mtd. or mixed cap. fuel tanks) (N.A. w/14,600 lb. or 16,000 lb. Front Axle) (N.A. w/HD trans. w/tandem axles)	0	67.00	0	0
29KF00-AC	Aft of Cab, Outside Frame Rails — Standard Weight — L.H. (Avail. w/2- or 3-battery system only) (Avail. w/forward mtd. L.H. or R.H. single, or forward mounted dual fuel tanks)	0	67.00	0	0
29LL00-AA	— L.H. & R.H. (2 batteries each side) (Avail. w/comb. of 4 batteries and forward mounted L.H. or R.H. single or forward mounted dual fuel tanks)	35	67.00	0	0
29KD00-AC	Under Cab, Outside Frame Rails, Lightweight — Forward Mounted (Incl. frame mtd. cab access steps) (Avail. on-hwy. service only) — L.H. (Avail. w/2- or 3-battery system) (Avail. w/forward or rear mounted R.H. single, rear mounted L.H. single or rear mounted dual fuel tanks)	-12	128.00	0	0
29LJ00-AB	— R.H. (Avail. w/2- or 3-battery system only) (Avail. w/forward mounted L.H. single fuel tanks only)	-12	195.00	0	0
29LK00-AA	— L.H. & R.H. (2 batteries each side) (Avail. w/comb. of 4-battery system and rear mounted fuel tanks only)	10	323.00	0	0

(1) Not available w/Cat. 3406E or 3306C eng.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	29 — BATTERIES/ BOXES/ CABLES (Refer to the Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions.) (Continued)				
29KE00	Battery Box, Frame Mounted Under Cab, Outside Frame Rails, Standard Weight — Forward Mounted (Incl. frame mtd. cab access steps) — L.H. (Avail. w/2- or 3- battery system) (Avail. w/forward mounted R.H. single, rear mounted L.H. single or rear mounted dual fuel tanks) (Standard)	—	—	S	S
29KE00-AA	— L.H. (Avail. w/4-battery system) (Avail. w/forward mounted R.H. single fuel tanks only).....	12	215.00	O	O
29LG00-AB	— R.H. (Avail. w/2- or 3-battery system) (Avail. w/forward mounted L.H. single fuel tanks only).....	0	67.00	O	O
29LG00-AE	— R.H. (Avail. w/4-battery system) (Avail. w/forward mounted L.H. single fuel tanks only).....	12	283.00	O	O
29LH00-AA	— L.H. & R.H. (2 batteries each side) (Avail. w/comb. of 4-battery system and rear mounted fuel tanks only)	35	67.00	O	O
29KG00-AC	Battery Terminals, Remote (Jump start studs) (N.A. w/R.H. mounted 4-battery/1-box system)	0	25.00	O	O
	30 — ENGINES				
	(Engine listings show Advertised Horsepower/Advertised Torque/Governed RPM; For specific ratings and performance curves, see Eng. Section of the Comp. Info Data Book; See Safety-Noise-Emission Section of Component Book) CATERPILLAR C-10 (ELECTRONIC) DIESEL (Incl. Speed/Cruise control which may be deleted)				
300700-AA	— 305 HP/ 1050 lb.-ft./ 2100 RPM	0	NC	O	O
30X000	— 305 HP/ 1150 lb.-ft./ 1800 RPM (Standard)	—	—	S	S
30X100-AA	— 305 HP/ 1150 lb.-ft./ 2100 RPM	0	NC	O	O
30X300-AA	— 335 HP/ 1250 lb.-ft./ 1800 RPM (10)	15	1685.00	O	O
300800-AA	— 335 HP/ 1250 lb.-ft./ 2100 RPM (10)	15	1685.00	O	O
30X400-AA	— 335 HP/ 1350 lb.-ft./ 1800 RPM (10)	15	1685.00	O	O
30X500-AA	— 350 HP/ 1350 lb.-ft./ 1800 RPM (10)	15	2125.00	O	O
30X600-AA	— 370 HP/ 1350 lb.-ft./ 1800 RPM (10)	15	2125.00	O	O
	CATERPILLAR C-10-MT (MULTI-TORQUE) DIESEL (Incl. Speed/Cruise control which may be deleted) (N.A. w/automatic trans.)				
30X700-AA	— 335-370 HP/ 1250-1350 lb.-ft./ 1800 RPM (10)	15	1685.00	O	O
	CATERPILLAR C-12 (ELECTRONIC) DIESEL (Incl. Speed/Cruise control which may be deleted)				
300900-AA	— 335 HP/ 1550 lb.-ft./ 2100 RPM (6) (10)	89	2345.00		O
30XM00-AA	— 355 HP/ 1350 lb.-ft./ 1800 RPM (10)	36	2345.00	O	O
301E00-AA	— 355 HP/ 1350 lb.-ft./ 2100 RPM (10)	N/A	2345.00	O	O
30XP00-AA	— 380 HP/ 1450 lb.-ft./ 1800 RPM (6) (10)	89	2807.00	O	O
301D00-AA	— 380 HP/ 1450 lb.-ft./ 2100 RPM (6) (10)	89	2807.00	O	O
301C00-AA	— 395 HP/ 1450 lb.-ft./ 1800 RPM (6) (10)	89	2807.00	O	O
301B00-AA	— 395 HP/ 1450 lb.-ft./ 2100 RPM (6) (10)	89	2807.00	O	O
30XR00-AA	— 410 HP/ 1450 lb.-ft./ 1800 RPM (6) (9) (10)	89	3911.00	O	O
301A00-AA	— 410 HP/ 1450 lb.-ft./ 2100 RPM (6) (9) (10)	89	3911.00	O	O
30XS00-AA	— 410 HP/ 1550 lb.-ft./ 1800 RPM (6) (9) (10)	89	3908.00		O
30XT00-AA	— 410 HP/ 1550 lb.-ft./ 2100 RPM (6) (9) (10)	89	3911.00		O

(6) Incl. 15-1/2", 2-plate ceramic (7-spring/3600 lb.) manual adjust 1650 lb.-ft. clutch, Code 36FC00.

(9) Req. trans. oil cooler w/Fuller trans.

(10) Incl. 1050 sq. in. engine cooling module.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	30 — ENGINES (Continued)				
	CATERPILLAR C-12-MT (MULTI-TORQUE) DIESEL (Incl. Speed/Cruise control which may be deleted) (N.A. w/automatic trans.)				
30XU00-AA	— 355-410 HP/ 1350-1450 lb.-ft./ 1800 RPM (6) (9) (10)	89	2492.00	0	0
30XV00-AA	— 355-410 HP/ 1350-1550 lb.-ft./ 1800 RPM (6) (9) (10)	89	2495.00		0
30XW00-AA	— 380-410 HP/ 1450-1550 lb.-ft./ 1800 RPM (6) (9) (10)	89	2807.00		0
	CATERPILLAR 3306C (MECHANICAL) DIESEL (Incl. intake air heater; Engine mtd. fuel filter Cat. 1P22; Engine mtd. oil filter Cat. IR0658, by-pass built into oil filter base, 3 qts.) (Deletes std. fuel cooler) (Does not incl. Speed/Cruise control) (Req. serviceability enhanced oil fill and dipstick Code 373900) (N.A. w/HD trans.) (Req. Warning Lights and Chime Code 26M500)				
30TG00-AJ	— 300 HP/ 1150 lb.-ft./ 1900 RPM	-37	CR 2620.00	0	0
	CUMMINS N14E PLUS (CELECT) DIESEL (Incl. Holset QE296 13.2 CFM air compressor; Speed/Cruise control which may be deleted; Frame mtd. fuel filter Fleetguard FS-1212; Eng. mtd. oil filter, full flow & by-pass, Cummins LF-3000, 3.2 qts.; Fuel cooler; Three 625 CCA 93 AH batteries)				
30WE00-AR	— N14-350E+ — 350 HP/ 1400 lb.-ft./ 1800 RPM (7) (10)	858	4445.00	0	
30WE00-AT	— 350 HP/ 1400 lb.-ft./ 1800 RPM (10)	823	4445.00		0
30WF00-AR	— 350 HP/ 1400 lb.-ft./ 2100 RPM (7) (10)	858	4685.00	0	
30WF00-AT	— 350 HP/ 1400 lb.-ft./ 2100 RPM (10)	823	4685.00		0
30WG00-AP	— N14-370E+ — 370 HP/ 1400 lb.-ft./ 1800 RPM (7) (10)	858	4445.00	0	
30WG00-AT	— 370 HP/ 1400 lb.-ft./ 1800 RPM (10)	823	4445.00		0
30WH00-AP	— 370 HP/ 1400 lb.-ft./ 2100 RPM (7) (10)	858	4685.00	0	
30WH00-AT	— 370 HP/ 1400 lb.-ft./ 2100 RPM (10)	823	4685.00		0
30WJ00-AP	— 370 HP/ 1450 lb.-ft./ 1800 RPM (6) (10)	876	4559.00	0	0
30WK00-AP	— 370 HP/ 1450 lb.-ft./ 2100 RPM (6) (10)	876	4800.00	0	0
30WL00-AP	— N14-410E+ — 410 HP/ 1450 lb.-ft./ 1800 RPM (6) (9) (10)	876	6280.00	0	0
30WM00-AP	— 410 HP/ 1450 lb.-ft./ 2100 RPM (6) (9) (10)	876	6521.00	0	0
30WN00-AP	— N14-435E+ — 435 HP/ 1450 lb.-ft./ 1800 RPM (6) (9) (10)	876	6280.00	0	0
30WP00-AP	— 435 HP/ 1450 lb.-ft./ 2100 RPM (6) (9) (10)	876	6521.00	0	0
30WQ00-AB	— 435 HP/ 1550 lb.-ft./ 1800 RPM (6) (9) (10)	876	6280.00		0
30WR00-AB	— 435 HP/ 1550 lb.-ft./ 2100 RPM (6) (9) (10)	876	6521.00		0
	CUMMINS N14-ESP PLUS (CELECT) DIESEL (Incl. Holset QE296 13.2 CFM air compressor; Speed/Cruise control which may be deleted; Frame mtd. fuel filter Fleetguard FS-1212; Engine mtd. oil filter; Full-flow & by-pass, Cummins LF-3000, 3.2 qts.; Fuel cooler; Three 625 CCA 93AH batteries) (N.A. w/automatic trans.)				
30WW00-AB	— N14-ESP+ — 370-435 HP/ 1450-1550 lb.-ft./ 1800 RPM (6) (9) (10)	876	4639.00		0
	DETROIT DIESEL SERIES 60 11.1L (Incl. Speed/Cruise control which may be deleted; Coolant conditioner filter Nalcool 3000 spin-on type; Engine mtd. fuel filter AC-T915D primary filter, AC-TP916D secondary filter; Eng. mtd. oil filter DDC AC PF-2100 full-flow, 6 qts. & fuel cooler; by-pass not req.; Three 625 CCA 93 AH batteries Code 29AG00) (Req. serviceability enhanced oil fill and dipstick Code 373900) (N.A. w/manual trans.)				
30T300-AL	— 11.1L — 330 HP/ 1250 lb.-ft./ 2100 RPM (10)	796	1869.00	0	0
30T400-AL	— 330 HP/ 1350 lb.-ft./ 2100 RPM (10)	796	1869.00	0	0
	DETROIT DIESEL SERIES 60 12.7L (Incl. Speed/Cruise control which may be deleted; Nalcool coolant conditioner filter 3000 spin-on type; Engine mtd. fuel filter AC-T915D primary filter, AC-TP916D secondary filter; Eng. mtd. oil filter DDC AC PF-2100 full-flow, 6 qts. & fuel cooler; Three 625 CCA 93 AH batteries Code 29AG00) (Req. serviceability enhanced oil fill and dipstick Code 373900) (N.A. w/manual trans.)				
30RE00-AF	— 12.7L — 370 HP/ 1450 lb.-ft./ 2100 RPM (10)	919	5135.00	0	0

(6) Incl. 15-1/2", 2-plate ceramic (7-spring/3600 lb.) manual adjust 1650 lb.-ft. clutch, Code 36FC00.

(7) Incl. 15-1/2", 2-plate ceramic (7-spring/3200 lb.) manual adjust 1450 lb.-ft. clutch, Code 36DD00.

(9) Req. trans. oil cooler w/Fuller trans.

(10) Incl. 1050 sq. in. engine cooling module.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	32 — EXHAUST SYSTEM (Refer to Exhaust Restriction charts in the Appendix at the end of this model for additional restrictions.) (See Component Book for installation sketches)				
32FD00-AB	SINGLE HORIZONTAL MUFFLER AND HORIZONTAL OUTLET, R.H. (N.A. w/26.0 SM frame)	5	CR 201.00	0	0
	SINGLE HORIZONTAL MUFFLER WITH STRAIGHT VERTICAL OUTLET STACK, R.H. (N.A. w/26.0 SM frame) CAB MOUNTED, R.H. (Incl. exhaust heat shield) — Over Frame (N.A. w/full aero pkg. Code 23YG00, cab side extenders Code 231F00, aero reinforcements only pkg. Code 23E100 or flywheel PTO Code 37EF00)				
32FE00-AC	— Plain Outlet	73	260.00	0	0
32FG00-AC	— Bright Outlet	75	321.00	0	0
	— Under Frame (Avail. w/L.H. fuel tanks only) (N.A. w/full aero pkg. Code 23YG00, cab side extenders Code 231F00 or aero reinforcements only pkg. Code 23E100)				
32FF00-AC	— Plain Outlet	71	260.00	0	0
32FH00-AC	— Bright Outlet	73	321.00	0	0
	FRAME MOUNTED, R.H. — Over Frame (N.A. w/flywheel PTO Code 37EF00) — Use without full aero pkg. Code 23YG00 or cab side extenders Code 231F00; Also use w/ aero prep. pkg. Code 23E100. (Incl. exhaust heat shield)				
32FJ00-AC	— Plain Outlet	85	451.00	0	0
32FL00-AC	— Bright Outlet	87	511.00	0	0
	— Use with full aero pkg. Code 23YG00 or cab side extenders Code 231F00. (Exhaust heat shield deleted)				
32FJ00-AF	— Plain Outlet	80	451.00	0	0
32FL00-AF	— Bright Outlet	82	511.00	0	0
	— Under Frame (Avail. w/L.H. fuel tanks only) — Use without full aero pkg. Code 23YG00 or cab side extenders Code 231F00; Also use w/ aero prep. pkg. Code 23E100. (Incl. exhaust heat shield)				
32FK00-AC	— Plain Outlet	110	451.00	0	0
32FM00-AC	— Bright Outlet	112	511.00	0	0
	— Use with full aero pkg. Code 23YG00 or cab side extenders Code 231F00 (Exhaust heat shield deleted)				
32FK00-AG	— Plain Outlet	105	451.00	0	0
32FM00-AG	— Bright Outlet	107	511.00	0	0
-----		-----			
	SINGLE HORIZONTAL MUFFLER, R.H. WITH DUAL BRIGHT STRAIGHT VERTICAL OUTLET STACKS (N.A. w/26.0 SM frame or trailer towing pkg. Code 19NH00) CAB MOUNTED (Incl. exhaust heat shield) — Over Frame w/ Bright Outlets (N.A. w/full aero pkg. Code 23YG00, cab side extenders Code 231F00; aero reinforcements pkg. Code 23E100 or flywheel PTO Code 37EF00) (Req. unipac tractor pkg. Code 20GE00).....	85	359.00	0	0
32F100-AB	FRAME MOUNTED — Over Frame w/ Bright Outlets (Req. unipac tractor pkg. Code 20GE00) (N.A. w/flywheel PTO Code 37EF00)				
32F200-AB	— Use without full aero pkg. Code 23YG00 or cab side extenders Code 231F00; Also use w/ aero prep. pkg. Code 23E100; Also use with full aero pkg. Code 23YG00 or cab side extenders Code 231F00 when either is ordered with back of cab access pkg. Code 23YA00 (Includes exhaust heat shield)	210	359.00	0	0
32F200-AF	— Use with full aero pkg. Code 23YG00 or cab side extenders Code 231F00 unless either is ordered with back-of-cab access pkg. Code 23YA00. (Exhaust heat shield deleted).....	205	359.00	0	0

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	32 — EXHAUST SYSTEM (Refer to Exhaust Restriction charts in the Appendix at the end of this model for additional restrictions.) (See Component Info. Data Book for installation sketches) (Continued)				
	SINGLE VERTICAL MUFFLER WITH STRAIGHT VERTICAL OUTLET STACK, R.H.				
	CAB MOUNTED, R.H. (N.A. w/R.H. clean CA fuel tanks)				
	— Use without full aero pkg. Code 23YG00 or cab side extenders Code 231F00; Use with cab aero prep. pkg. Code 23E100 (Incl. exhaust heat shield)				
32FW00	— Plain Outlet (Standard)	—	—	S	S
32FX00-AC	— Bright Outlet (Incl. bright heat shield & pipe)	2	171.00	0	0
	— Use with full aero pkg. Code 23YG00 or cab side extenders Code 231F00 (Exhaust heat shield deleted)				
32FW00-AH	— Plain Outlet	-5	99.00	0	0
32FX00-AK	— Bright Outlet	-3	269.00	0	0
	FRAME MOUNTED, R.H. (N.A. w/R.H. clean CA fuel tanks)				
	— Use without full aero pkg. Code 23YG00 or cab side extenders Code 231F00; Use with cab aero prep. pkg. Code 23E100. (Incl. exhaust heat shield)				
32FY00-AC	— Plain Outlet	25	99.00	0	0
32F000-AC	— Bright Outlet	27	269.00	0	0
	— Use with full aero pkg. Code 23YG00 or cab side extenders Code 231F00 (Exhaust heat shield deleted)				
32FY00-AG	— Plain Outlet	20	99.00	0	0
32F000-AF	— Bright Outlet	22	269.00	0	0
32FN00-AB	SINGLE TRANSVERSE HORIZONTAL MUFFLER WITH STRAIGHT HORIZONTAL OUTLET STACK, R.H. (Muffler mounted under & outside frame rail R.H.)	108	CR 71.00	0	0
	SINGLE TRANSVERSE HORIZONTAL MUFFLER & VERTICAL OUTLET, R.H. CAB MOUNTED (N.A. w/full aero pkg. Code 23YG00, cab side extenders Code 231F00 or aero reinforcements only Code 23E100)				
32FP00-AB	— Plain Outlet	89	103.00	0	0
32FR00-AB	— Bright Outlet	91	163.00	0	0
	33 — EXHAUST EQUIPMENT				
	Rain Cap, Bright (N.A. w/turn-out elbow Code 33BT00)				
33BR00-AJ	— Avail. w/ Dual Vertical Exhaust Outlet Only	6	37.00	0	0
33BR00-AN	— Avail. w/ Single Vertical Exhaust Outlet Only	3	19.00	0	0
STD.	Straight Vertical Stack End (Incl. w/all vertical outlets) (Plain w/plain exh. & bright w/bright exh.) (Standard)	—	—	S	S
	Turn-Out Elbow (In lieu of straight vertical exhaust outlet stack only; N.A. w/rain cap. Code 33BR00) (Plain w/plain exh. & bright w/bright exh.)				
33BT00-AB	— Avail. w/ Dual Vertical Exhaust Outlet only	4	101.00	0	0
33BT00-AE	— Avail. w/ Single Vertical Exhaust Outlet only	2	51.00	0	0
	36 — CLUTCHES				
	Clutch, Eaton-Spicer				
	14" SD, 2-plate Ceramic (8-Spring/3200lb.) Manual Adjust. (1400 lb.-ft. cap.)				
36A700	— For Cat. C-10, C-10 MT, C-12, 3306 (Up thru 1400 lb.-ft) eng. (Standard) ..	—	—	S	S
36A700	— For Cum. N14+ (Up thru 1400 lb.-ft) eng. (Standard)	—	—		S
	15-1/2", 2-plate Ceramic (8-Spring/3200lb.) Manual Adjust. (1400 lb.-ft. cap.)				
36DK00-A0	— For Cat. C-10, C-10 MT, C-12, 3306 (Up thru 1400 lb.-ft) eng.	28	91.00	0	0
36DK00-A1	— For Cum. N14+ (Up thru 1400 lb.-ft) eng.	28	91.00		0

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	36 — CLUTCHES (Continued)				
36DD00-C2	Clutch, Eaton-Spicer (Continued) 15-1/2", 2-plate Ceramic (7-Spring/3200lb.) Manual Adjust. (1450 lb.-ft. cap.) (Incl. w/Cum. N14+ 4x2 - up thru 1400 lb.-ft.) — For Cat. C-10, C-10 MT, C-12 (Up thru 1400 lb.-ft.) eng.	35	143.00	0	0
36FC00-BA	15-1/2", 2-plate Ceramic (7-Spring/3600lb.) Manual Adjust. (1650 lb.-ft. cap.) (Incl. w/Cat. C-12, C-12 MT, +ESP, N14+ or N14+ ESP (1401 thru 1650 lb.-ft.) eng.) — For Cum. N14+ (Up thru 1400 lb.-ft.) eng.	18	13.00	0	
36FC00-BC	— For Cum. N14+ (Up thru 1400 lb.-ft.) eng.	18	156.00		0
36FG00-AG	15-1/2", 2-plate Ceramic (7-Spring/3600lb.) Spicer "Solo" Adjustment Free (1650 lb.-ft. cap.) — For Cum. N14+ (Up thru 1400 lb.-ft.) eng.	14	157.00	0	
36FG00-AE	— For Cum. N14+ (Up thru 1400 lb.-ft.) eng.	14	300.00		0
36FG00-AC	— For Cat. C-12, C-12 MT, Cum. N14+ or N14+ ESP (1401 thru 1650 lb.-ft) eng.	49	157.00	0	0
36AA00-AN	Clutch Housing, Aluminum (Avail. for On-Hwy. service only)	-53	20.00	0	0
STD.	Clutch Housing, Cast Iron (Standard)	—	—	S	S
36CC00-AD	Remote Lube Fitting — Clutch Throw-out Bearing	0	12.00	0	0
	37 — ENGINE EQUIPMENT				
	Air Cleaner				
373P00-AB	Donaldson, Dual element, Two Stage — Use w/all engines except Cat. 3306	16	75.00	0	0
373P00-AC	— Use w/ Cat. 3306 eng. only	13	75.00	0	0
375X00-AC	Donaldson, High Capacity, Single Stage — Use w/ Cum. N14+ or DDC-60 eng. only	13	223.00	0	0
375X00-AE	— Use w/ Cat. C-10, C-12 & 3306 eng. only	3	223.00	0	0
STD.	Donaldson, Single Stage (Standard)	—	—	S	S
373R00-AC	Farr ECO-II, Single Stage, Disposable — Use w/all engines	2	255.00	0	0
373T00-AB	Air Intake, Source — Engine Inside/ Outside Air (Incl. in-cab controls) (Avail. w/truck only) (N.A. w/tandem axle in comb. w/main locking differential Code 13AW00 and air susp. dump valve Code 48AC00)	12	477.00	0	0
STD.	Outside Air (Standard)	—	—	S	S
37AY00-AR	Block Heater, 110 Volt — Single 1500 Watt Phillips (Incl. front-mounted cord and receptacle)	1	72.00	0	0
373W00-AC	Block Heater Receptacle Under Driver Door Mounted (Avail. w/block heater option Code 37AY00 in lieu of front-mounted cord)	1	51.00	0	0
373X00-AC	Dirt Filter/ Bug Screen, Grille Mounted	2	53.00	0	0
	Engine Brake (Incl. I/P mounted switches) "C Brake by Jacobs"				
376700-AG	— Use with Cummins N14+ eng. only	85	1848.00	0	0
	Jake Brakes — Jacobs				
374T00-AA	Model 310A (Avail. w/Cat. C-10 eng. only)	75	1825.00	0	0
377H00-AA	Model 312A (Avail. w/Cat. C-12 eng. only)	70	1825.00	0	0
374V00-AA	Model 336A (Avail. w/Cat. 3306 eng. Code 30TG00 only)	72	1825.00	0	0
374000-AA	Model 760A (Avail. w/DDC-60 11.1L eng. only) (N.A. w/pressure governor system Code 371W00)	89	1775.00	0	0
374100-AA	Model 765A (Avail. w/DDC-60 12.7L eng. only) (N.A. w/pressure governor system Code 371W00)	89	1775.00	0	0

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	37 — ENGINE EQUIPMENT (Continued)				
373000	Engine Mounts — Compression Type (Standard)	—	—	S	S
373100-AB	— Focal Mounts (Avail. on-hwy. only) (N.A. w/14,600 lb. Front Axle Code 10A200, 16,000 lb. Front Axle Code 10AF00, 18,000 lb. Front Axle Code 10AD00 or 20,000 lb. Front Axle Code 10AH00)	11	119.00	O	O
STD.	Engine Shutoff (Solenoid) — Ignition Key (Standard)	—	—	S	S
373400-AA	Fan Clutch (Automatic Cycling) — Eaton — Viscous (Avail. w/Cat. C-10 & C-12, Cum. N14+ eng.) (N.A. w/Cat. 3306 or DDC-60 eng.) (N.A. w/engines over 1900 RPM)	1	CR 36.00	O	O
37FP00-AA	— Horton "On-Off" (N.A. w/Cat. 3306 eng.)	0	97.00	O	O
373600	— Kysor "On-Off" (Standard)	—	—	S	S
374N00-AB	Fan Clutch Override (Avail. w/"On-Off" fan clutch only; Incl. I/P mounted switch)	0	71.00	O	O
373800	Hose Pkg., Silicone (Incl. radiator, heater, engine drawdown hoses and torque controlled clamps)	—	—	O	O
STD.	Hose, Radiator, EPDM Rubber (Incl. torque controlled clamps) (Standard)	—	—	S	S
373900-AC	Oil Fill & Dipstick, Serviceability Enhanced	1	44.00	O	O
STD.	Oil Fill System, Standard Oil Fill & Check (N.A. w/Cat. 3306 or DDC-60 eng.) (Standard)	—	—	S	S
374D00-AB	Power Take-Off, Crankshaft Driven Damper (Incl. radiator mounted (fixed) grille; Requires extended frame Code 40GB00 or front bumper ext. Code 59HC00; Avail. w/truck only) — For use with electronic eng. w/ Speed/ Cruise Control or with mechanical engine	12	251.00	O	O
374D00-AC	— For use with Speed/ Cruise Control Delete Code 37LG00 (Incl. steering wheel mtd. switches w/electronic eng.)	12	285.00	O	O
37EF00-AB	Power Take-Off, Flywheel Driven (Avail. w/Cat. C-10, C-12, Cat. 3306 eng. only; Avail. w/manual trans. only; Avail. w/truck only)	154	2719.00	O	O
374B00-AC	Radiator, Clog Resistant (For dirty environment) (Avail. as 1050 sq. in. eng. cooling module only) (Avail. w/eng. from 306 HP thru 310 HP w/man. trans. only) (Requires on/off fan clutch) (N.A. w/Cat. 3306 eng. or extra cooling Code 37AN00)	16	39.00	O	O
37AN00-AR	Radiator, Cooling, Extra (N.A. w/clog resistant radiator Code 374B00) — 1050 sq. in. module (Avail. w/eng. up thru 305 HP max.) (N.A. w/Cat. 3306 eng.)	15	159.00	O	O
STD.	Radiator, Cooling Nominal — 900 sq. in. cooling module (Standard)	—	—	S	S
STD.	Speed/ Cruise Control (With electronic engines) (Standard)	—	—	S	S
37LG00-AV	Speed/ Cruise Control Delete (With electronic engines)	-5	CR 72.00	O	O
374F00-AC	Starting Aid, Cold Weather Ether Air Intake — Automatic (Does not incl. ether tank; N.A. w/Cat. 3306C engine Code 30TG00)	7	87.00	O	O
STD.	Starter, Electric (Standard)	—	—	S	S
374L00-AA	Starter, Electric w/ Overcrank Protection	0	123.00	O	O
STD.	Starter Interlock (Clutch Pedal Actuated) (Standard)	—	—	S	S
37AA00-BL	Throttle, Locking T-Handle (Avail. w/Cat. 3306C eng. only Code 30TG00)	1	23.00	O	O
37AD00-A4	Throttle, Locking, Vernier Type (Avail. w/Cat. 3306C eng. only Code 30TG00)	0	41.00	O	O
374H00-AC	Warning & Shutdown System, Engine (Incl. warning light & chime Code 26M500; Avail. w/Cat. 3306C eng. only Code 30TG00)	1	317.00	O	O

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	40 — FRAME — SINGLE REAR AXLES ONLY				
40E700-AP	Single Channel 10.76 SM, 120,000 PSI — 141" wb	0	CR 51.00	0	
40E700-AR	— 153" wb	-115	CR 51.00	0	
40E700-AT	— 165" wb	-135	CR 51.00	0	
40E900	Single Channel 13.3 SM, 120,000 PSI — 153" wb (<i>Standard</i>)	—	—	S	
40E900-BC	— 165" thru 261" wb	0	NC	0	
40FA00-DH	Single Channel 15.9 SM, 120,000 PSI — 153" wb	119	279.00	0	
40FA00-DJ	— 165" wb	139	279.00	0	
40FA00-DK	— 177" wb	146	279.00	0	
40FA00-DL	— 189" wb	152	324.00	0	
40FA00-DM	— 207" wb	169	324.00	0	
40FA00-DN	— 213" wb	172	324.00	0	
40FA00-DP	— 225" wb	179	400.00	0	
40FA00-DR	— 237" wb	194	400.00	0	
40FA00-DT	— 243" wb	197	400.00	0	
40FA00-DV	— 249" wb	207	400.00	0	
40FA00-DW	— 261" wb	221	400.00	0	
	40 — FRAME — TANDEM REAR AXLES ONLY				
40E900	Single Channel 13.3 SM, 120,000 PSI (<i>N.A. w/46,000 lb. tandem Rear Axle</i>) — 153" wb (<i>Standard</i>)	—	—		S
40E900-DE	— 165" wb	0	NC		0
40E900-BN	— 177" thru 261" wb	0	NC		0
40FA00-DX	Single Channel 15.9 SM, 120,000 PSI (<i>N.A. w/46,000 lb. tandem Rear Axle</i>) — 153" wb	130	296.00		0
40FA00-DY	— 165" wb	139	296.00		0
40FA00-D0	— 177" wb	146	296.00		0
40FA00-D1	— 189" wb	152	353.00		0
40FA00-D2	— 207" wb	169	353.00		0
40FA00-D3	— 213" wb	172	353.00		0
40FA00-D4	— 225" wb	179	353.00		0
40FA00-D5	— 237" wb	194	353.00		0
40FA00-D6	— 243" wb	197	400.00		0
40FA00-D7	— 249" wb	207	400.00		0
40FA00-D8	— 261" wb	221	400.00		0
40FE00-A7	Single Channel, Integral, Extended Frame (24" from front of bumper to face of grille) (<i>Req. crankshaft-driven PTO; Incl. radiator mounted (fixed) grille; N.A. w/bumper extension Code 59GK00, driving lights Code 27G800 or fog lights Code 27G700; N.A. w/60" front susp.</i>) 20.25 SM, 125,000 PSI (<i>Avail. w/walking beam or Neway tandem susp. only</i>) — 153" wb	411	615.00		0
40FE00-A8	— 165" wb	431	615.00		0
40FE00-A9	— 177" wb	447	615.00		0
40FE00-BA	— 189" wb	463	705.00		0
40FE00-BB	— 207" wb	503	705.00		0
40FE00-BC	— 213" wb	511	705.00		0
40FE00-BD	— 225" wb	527	705.00		0

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	40 — FRAME — TANDEM REAR AXLES ONLY (Continued)				
	Inverted "L" Reinforced (N.A. w/5th wheel options or tapered rear frame ends) (N.A. w/HAS, HFS or Airliner 40K susp.; N.A. w/60" front susp.) 20.5 SM, 120,000 PSI (N.A. w/46,000 lb. tandem Rear Axle)				
40FB00-A7	— 177" wb	513	415.00		0
40FB00-A8	— 189" wb	541	505.00		0
40FB00-A9	— 207" wb	611	505.00		0
40FB00-BA	— 213" wb	625	505.00		0
40FB00-BB	— 225" wb	653	505.00		0
40FB00-BC	— 237" wb	716	505.00		0
40FB00-BD	— 243" wb	730	552.00		0
40FB00-BE	— 249" wb	772	552.00		0
40FB00-BF	— 261" wb	828	552.00		0
	Single Channel, Variable Depth Rail 26.0 SM, 120,000 PSI (N.A. w/46,000 lb. tandem Rear Axle) (Avail. w/walking beam tandem susp. only) (Avail. w/truck only) (Avail. w/single vert. muffler Codes 32FW00, 32FX00, 32FY00 or 32F000, single transverse muffler & horiz. outlet Code 32FN00 or single transverse muffler & vert. outlet Codes 32FP00 or 32FR00)				
40GN00-AF	— 207" wb	251	848.00		0
40GN00-AE	— 213" wb	254	848.00		0
40GN00-AD	— 225" wb	261	848.00		0
40GN00-AH	— 237" wb	N/A	928.00		0
	Double Channel (N.A. w/5th wheel options or tapered rear frame ends) 27.0 SM, 120,000 PSI (N.A. w/HAS-400, HAS-40LH or HFS susp.; N.A. w/60" front susp.)				
40FC00-A7	— 177" wb	634	745.00		0
40FC00-A8	— 189" wb	669	909.00		0
40FC00-A9	— 207" wb	757	909.00		0
40FC00-BA	— 213" wb	774	909.00		0
40FC00-BB	— 225" wb	810	909.00		0
40FC00-BC	— 237" wb	888	909.00		0
40FC00-BD	— 243" wb	906	995.00		0
40FC00-BE	— 249" wb	958	995.00		0
40FC00-BF	— 261" wb	1028	995.00		0
	Double Channel (N.A. w/5th wheel options or tapered rear frame ends) 30.0 SM, 120,000 PSI (N.A. w/HAS-400, HAS-40LH or HFS susp.; N.A. w/60" front susp.)				
40FD00-A7	— 177" wb	753	911.00		0
40FD00-A8	— 189" wb	796	1111.00		0
40FD00-A9	— 207" wb	900	1111.00		0
40FD00-BA	— 213" wb	922	1111.00		0
40FD00-BB	— 225" wb	963	1111.00		0
40FD00-BC	— 237" wb	1058	1111.00		0
40FD00-BD	— 243" wb	1078	1215.00		0
40FD00-BE	— 249" wb	1141	1215.00		0
40FD00-BF	— 261" wb	1225	1215.00		0

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	FRAME MODIFICATIONS				
40GB00-AB	Extended Frame, Front, Integral (24" from front bumper to face of grille) (Req. crankshaft-driven PTO; Incl. radiator mounted (fixed) grille and full width swept back steel bumper painted Med. Titanium) (N.A. w/bumper extension Code 59HC00, driving lights Code 27G800 or fog lights Code 27G700; N.A. w/60" front springs) (N.A. as 249" or 261" wb tandem axle tractor)	68	269.00	0	0
40GB00-AD	— Avail. w/ 15.9 SM Frame only	68	269.00		0
40GB00-AN	— Avail. w/ 20.5 SM Frame only	N/A	269.00		0
40GB00-AF	— Avail. w/ 26.0 SM Frame only (207", 213" or 225" wb only)	68	269.00		0
40GB00-AH	— Avail. w/ 27.0 SM Frame only	68	269.00		0
40GB00-AH	— Avail. w/ 30.0 SM Frame only	68	269.00		0
40EX00-AC	Frame Crossmembers Tractor Ramp Rear Crossmember, Full Width, Steel (Incl. crossmember mtd. taillights in lieu of standard; Avail. w/on-hwy. tractor only; N.A. w/trailer towing pkg. Code 19NH00) (N.A. w/square cut frame ends Code 40EN00, Truck-Lite rear lighting Code 27AAR0, reinforced frame or Neway rear susp.)	45	64.00	0	0
40EN00-AD	Frame End, Rear Square Cut (Avail. w/tractor only; Incl. w/truck)	9	NC	0	0
40EM00-AC	Tapered End Caps, Bolt-on (Avail. w/tractor only; N.A. w/reinforced frame Code 40FB00, square cut frame ends Code 40EN00, tractor ramp crossmember Code 40EX00 or outside frame rail mounted taillights Code 275600)	12	71.00	0	0
40EL00	Huck Fasteners, Frame (Rear cab supt., intermediate and rear suspension crossmembers) (Standard)	—	—	S	S
40G400-AB	Huck Fasteners, Frame — Delete (All Bolted Frame)	-19	NC	0	0
	43 — FUEL TANKS (Refer to the Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions.)				
43PA00-AB	Rectangular Tanks, Steel — Shallow 45 gal. (CLEAN CA) (N.A. w/4-battery system w/electronic engines)				
43N900-AB	— Single R.H. (Avail. only w/std. L.H. under cab battery box)	-26	NC	0	0
	— Single L.H. (Req. R.H. under cab battery box Code 29LG00 or 29LJ00)	-26	CR 60.00	0	0
43L700	55 gal. — Single R.H. (Standard)	—	—	S	S
43L800-AB	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank)	0	NC	0	0
43L900-AB	— Dual (Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank)	196	399.00	0	0
43MB00-AB	80 gal. — Single R.H.	54	197.00	0	0
43MA00-AB	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank)	54	197.00	0	0
43MC00-AB	— Dual (Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank)	309	709.00	0	0
43MD00-AB	Rectangular Tanks, Dual Mixed Capacity, Steel — Shallow (L.H. tank rear mtd. — R.H. tank fwd. mtd.) (Deletes std. fuel cooler) (Incl. dual draw/dual return fuel lines without crossover w/electronic engines)				
43ME00-AB	30 gal. L.H., 55 gal. R.H.	168	321.00	0	0
	55 gal. L.H., 80 gal. R.H.	251	560.00	0	0

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	43 — FUEL TANKS (Refer to the Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions.) (Continued)				
	Rectangular Tanks, Steel — Deep				
	50 gal.				
43MX00-AA	— Single R.H. (N.A. forward mounted)	17	NC	0	0
43MW00-AB	— Single L.H. (N.A. forward mounted)	17	NC	0	0
43MY00-AB	— Dual (Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (N.A. forward mounted)	236	399.00	0	0
	60 gal. (CLEAN CA) (N.A. w/4-battery system w/electronic engines)				
43PE00-AB	— Single R.H. (Req. std. L.H. under cab battery box)	21	79.00	0	0
43PD00-AB	— Single L.H. (Req. R.H. under cab battery box Code 29LG00 or 29LJ00)	21	79.00	0	0
	75 gal.				
43M100-AC	— Single R.H.	50	197.00	0	0
43M000-AC	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank)	50	197.00	0	0
43M200-AC	— Dual (Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank)	301	709.00	0	0
	100 gal.				
43M400-AB	— Single R.H.	125	229.00	0	0
43N000-AB	— Single L.H. (Req. opt. battery box location w/forward mtd. fuel tank)	125	229.00	0	0
43M500-AB	— Dual (Deletes std. fuel cooler) (Includes dual draw/dual return fuel lines without crossover w/electronic engines) (Req. opt. battery box location in combination w/forward mtd. fuel tank)	451	855.00	0	0
	Rectangular Tanks, Dual Mixed Capacity, Steel — Deep (L.H. tank rear mtd. — R.H. tank fwd. mtd.) (Deletes std. fuel cooler) (Incl. dual draw/dual return fuel lines without crossover w/electronic engines)				
43M600-AB	50 gal. L.H., 75 gal. R.H.	268	571.00	0	0
43M700-AB	75 gal. L.H., 100 gal. R.H.	371	800.00	0	0
	44 — FUEL TANK EQUIPMENT				
STD.	Fuel Cooler (with electronic engines w/single fuel tanks) (Standard)	—	—	S	S
	Fuel Tank Mounting Location				
STD.	Forward Mounted Fuel Tank (Max Location) (Standard) (Refer to Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions)	—	—	S	S
44HM00-AC	Rear Mounted Fuel Tank (N.A. w/mixed fuel tanks) (N.A. w/CLEAN CA fuel tanks) (Refer to Fuel Tank-Battery Box-Wheelbase Restriction charts in the Appendix at the end of this model for additional restrictions)	0	79.00	0	0
	Fuel Tank Supports				
STD.	— Standard-Weight Tank Supports (Standard)	—	—	S	S
	Fuel Lines				
44HX00-AB	— Dual Draw/ Dual Return With Under Tank Crossover (Avail. w/electronic engines only) (Avail. w/equal capacity dual fuel tanks only) (N.A. w/forward mtd. dual 150 gal. fuel tanks) (N.A. w/instr. pnl. mtd. pushbutton control for Allison electronic trans. Code 57C400 in comb. w/any horiz. muffler system)	15	15.00	0	0
STD.	— Single Draw/ Return (Standard)	—	—	S	S
	Steps				
STD.	Cab Length, Fuel Tank Mounted (Standard)	—	—	S	S

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	46 — SUSPENSION, FRONT (<i>Optimum ride and handling qualities are obtained with matched suspension. Mixed taper-leaf and multi-leaf suspensions on a vehicle is not available. See Component Book for details</i>)				
46CT00-AF	SUSPENSION, FRONT, MULTI-LEAF, 54" SPREAD (<i>N.A. w/taper-leaf rear susp.</i>) 10,000 lb. Cap. for 10,000 lb. Front Axle Code 10AG00 (<i>Avail. & Incl. w/truck or on-off hwy. tractor only</i>).....	0	NC	0	0
46CT00-AG	10,000 lb. Cap. for 12,000 lb. Front Axle Code 10AE00	-20	CR 20.00	0	0
46CV00-AG	12,000 lb. Cap. for 10,000 lb. Front Axle Code 10AG00	20	20.00	0	0
46CV00	12,000 lb. Cap. for 12,000 lb. Front Axle Code 10AE00 (<i>Standard</i>)	—	—	S	S
46CV00-AL	12,000 lb. Cap. for 13,000 lb. Front Axle Code 10AM00	-15	CR 20.00	0	0
46CW00-AG	13,200 lb. Cap. for 12,000 lb. Front Axle Code 10AE00	15	20.00	0	0
46CW00-AJ	13,200 lb. Cap. for 13,000 lb. Front Axle Code 10AM00	0	NC	0	0
46CW00-AL	13,200 lb. Cap. for 14,600 lb. Front Axle Code 10A200	-48	CR 20.00	0	0
46CX00-AG	14,600 lb. Cap. for 14,600 lb. Front Axle Code 10A200	0	NC	0	0
46CY00-AE	16,000 lb. Cap. for 14,600 lb. Front Axle Code 10A200	36	20.00	0	0
46CY00-AG	16,000 lb. Cap. for 16,000 lb. Front Axle Code 10AF00	0	NC	0	0
46CY00-AK	16,000 lb. Cap. for 18,000 lb. Front Axle Code 10AD00	-5	CR 20.00		0
46C000-AD	18,000 lb. Cap. for 16,000 lb. Front Axle Code 10AF00	5	20.00	0	0
46C000-AE	18,000 lb. Cap. for 18,000 lb. Front Axle Code 10AD00	0	NC		0
46C000-AF	18,000 lb. Cap. for 20,000 lb. Front Axle Code 10AH00	-19	CR 20.00		0
46C100-AC	20,000 lb. Cap. for 18,000 lb. Front Axle Code 10AD00	19	20.00		0
46C100-AD	20,000 lb. Cap. for 20,000 lb. Front Axle Code 10AH00	0	NC		0
	SUSPENSION, FRONT, TAPER-LEAF, 54" SPREAD (<i>Incl. front shock absorbers Code 13AB00</i>) (<i>N.A. w/multi-leaf rear susp.</i>)				
46C500-AD	10,000 lb. Cap. for 10,000 lb. Front Axle Code 10AG00 (<i>Avail. w/on-hwy. tractor only; N.A. w/severe duty</i>).....	-44	NC	0	0
46C600-AE	12,000 lb. Cap. for 10,000 lb. Front Axle Code 10AG00 (<i>N.A. w/severe duty</i>)	-42	143.00	0	0
46C600-AH	12,000 lb. Cap. for 12,000 lb. Front Axle Code 10AE00 (<i>N.A. w/severe duty</i>)	-62	123.00	0	0
46C700-AG	12,000 lb. Cap. for 12,000 lb. Front Axle Code 10AE00 w/ premium bushings (<i>Avail. w/on-hwy tractor only</i>).....	N/A	307.00	0	0
46C800-AF	13,200 lb. Cap. for 13,000 lb. Front Axle Code 10AM00 (<i>N.A. w/severe duty</i>)	-51	123.00	0	0
46C800-AG	13,200 lb. Cap. for 14,600 lb. Front Axle Code 10A200 (<i>Avail. w/truck or on-off hwy. tractor; N.A. w/severe duty</i>).....	-99	103.00	0	0
46C900-AH	14,600 lb. Cap. for 13,000 lb. Front Axle Code 10AM00 (<i>Avail. w/truck or on-off hwy. tractor only; N.A. w/severe duty</i>).....	-37	143.00	0	0
46C900-AE	14,600 lb. Cap. for 14,600 lb. Front Axle Code 10A200 (<i>N.A. w/severe duty</i>)	-85	123.00	0	0
	47 — SUSPENSION, REAR, SINGLE AXLE (<i>All susp. hts. listed are for empty condition</i>) (<i>Optimum ride and handling qualities are obtained with matched suspension. Mixed taper-leaf and multi-leaf suspensions on a vehicle is not available. See Component Book for details</i>)				
	SUSPENSION, REAR — MULTI-LEAF (<i>N.A. w/taper-leaf front susp.</i>)				
47J700-AH	21,000 lb. Cap. (<i>Normal Ride</i>) (46") (<i>Susp. ht. 10.88" w/under 12,000 lb. F.A.; Susp. ht. 11.88" w/12,000 lb. or higher F.A.</i>) (<i>Avail. w/truck only</i>) (<i>Incl. w/tractor</i>).....	-4	CR 23.00	0	
47LS00-AD	21,000 lb. Cap. (<i>Soft Ride</i>) (52") (<i>Susp. ht. 9.18" w/under 12,000 lb. F.A.; Susp. ht. 10.18" w/12,000 lb. or higher F.A.</i>) (<i>Avail. w/on-hwy. tractor only</i>)	-13	55.00	0	
47KA00	23,000 lb. Cap. (46") (<i>Susp. ht. 11.28" w/under 12,000 lb. F.A.; Susp. ht. 12.28" w/12,000 lb. or higher F.A.</i>) (<i>w/truck only</i>) (<i>Standard</i>)	—	—	S	
47J900-AB	24,500 lb. Cap. (<i>Avail. w/truck only</i>) (<i>Susp. ht. 12.00"</i>)	56	23.00	0	
	SUSPENSION, REAR — TAPER-LEAF (<i>Avail. for on-hwy. tractor applications only; Incl. rear shock absorbers</i>) (<i>N.A. w/multi-leaf front susp.</i>)				
47JP00-AD	21,000 lb. Cap. (<i>Normal Ride</i>) (46") (<i>Susp. ht. 9.72" w/under 12,000 lb. F.A.; Susp. ht. 10.72" w/12,000 lb. or higher F.A.</i>).....	-48	27.00	0	
47LT00-AB	21,000 lb. Cap. (<i>Soft Ride</i>) (52") (<i>Susp. ht. 9.02" w/under 12,000 lb. F.A.; Susp. ht. 10.02" w/12,000 lb. or higher F.A.</i>).....	4	103.00	0	

NOTE: All capacity ratings shown represent on-highway application.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	47 — SUSPENSION, REAR, SINGLE AXLE (All susp. hts. listed are for empty condition) (Optimum ride and handling qualities are obtained with matched suspension. Mixed taper-leaf and multi-leaf suspensions on a vehicle is not available. See Component Book for details) (Continued)				
	SUSPENSION, REAR, AIR				
	23,000 lb. Cap. AirLiner Air Susp. w/inner wheel chain clearance (1) (Incl. transverse control rods; brake camshaft support brackets & two shock absorbers) (Susp. ht. 10.00") (N.A. on severe duty) (N.A. w/2-speed rear axles)				
47LX00-AB	— Avail. w/ truck only	N/A	1129.00	0	
47LX00-AE	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve Code 48AC00)	N/A	1232.00	0	
	23,000 lb. Cap. Hendrickson Air, HAS-230 (N.A. for severe duty) (Susp. ht. 8.50")				
47KF00-AC	— Avail. w/ truck only	-69	916.00	0	
47KF00-AG	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve)	-4	1051.00	0	
	23,000 lb. Cap. Neway Air, AD-123 (Avail. w/RS-23-161 23,000 lb. Rear Axle only) (N.A. w/fifth wheel) (N.A. for severe duty) (Susp. ht. 8.75")				
47KG00-AC	— Avail. w/ truck only	41	1492.00	0	
47KG00-AG	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve Code 48AC00 & square cut frame ends Code 40EN00)	118	1625.00	0	
	SUSPENSION, REAR — AUXILIARY (Recommended for use w/high center of gravity loads and/or off-hwy. operations)				
47KH00	Single Leaf (Standard w/ truck only)	—	—	S	
47KH00-AD	Single Leaf (Avail. w/tractor only) (N.A. w/air ride suspensions)	61	59.00	0	
47KJ00-AB	Multi-Leaf (Avail. w/truck only) (N.A. w/soft ride or air ride suspension)	44	27.00	0	
47KJ00-AJ	Multi-Leaf (Avail. w/tractor only) (N.A. w/soft ride or air ride suspension)	106	87.00	0	
	47 — SUSPENSION, REAR, TANDEM (All susp. hts. listed are for empty condition)				
	SUSPENSION, REAR FOR 40,000 LB. AXLES				
	34,000 lb. Cap. Hendrickson Steel Walking Beam — 52" Axle Spacing				
47AW00	U2-340 (Susp. ht. 10.30") (Standard)	—	—		S
47AX00-AY	UE2-340 (N.A. w/reinforced frames) (Susp. ht. 11.23")	117	76.00		0
	36,000 lb. Cap. Hendrickson 4-Spring				
47KL00-AE	HFS-40LH — Avail. w/ on-hwy. tractor only (12,000 lb. max. Front Axle; 80,000 lbs. max. GCWR; Not approved for lift axle applications; N.A. w/reinforced frame) (Susp. ht. 10.00")	-206	CR 709.00		0
47K900-AB	HFS-400 — Avail w/ on-hwy. truck only (14,600 lb. max. Front Axle; N.A. w/reinforced frame) (Susp. ht. 10.11")	-134	CR 655.00		0
	40,000 lb. Cap. AirLiner Extra Duty Air Susp. 51" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember, heavy duty axle housing & welded axle seats) (Susp. ht. 8.50") (Avail. w/14,600 lb. max. front axle; max. 40,000 lb. rear axle) (Avail. only w/13.3 SM and 15.9 SM frame) (Refer to the frame chart for GVWR & WB restrictions)				
47L000-AB	— Avail. w/ on-hwy. truck only	N/A	CR 359.00		0
47L000-AE	— Avail. w/ on-hwy. tractor only (Incl. I/P mtd. air susp. dump valve)	N/A	CR 256.00		0

(1) Refer to Appendix for Suspension Applications.

NOTE: All capacity ratings shown represent on-highway application.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	47 — SUSPENSION, REAR, TANDEM (All susp. hts. listed are for empty condition) (Continued)				
	SUSPENSION, REAR, FOR 40,000 LB. AXLES (Continued)				
47AY00-AW	40,000 lb. Cap. Hendrickson Steel Walking Beam — 52" Axle Spacing				
	RT2-400 w/ rubber center bushings (Susp. ht. 11.15")	248	501.00		0
47A000-AW	RT2-400 w/ bronze center bushings (Susp. ht. 11.15")	249	693.00		0
47A100-AN	RT2-400 w/ transverse torque rods & rubber center bushings (Susp. ht. 11.15") ...	315	908.00		0
47A300-AW	RTE2-400 w/ rubber center bushings (N.A. w/reinforced frames) (Susp. ht. 11.17")	299	633.00		0
47A400-AW	RTE2-400 w/ bronze center bushings (N.A. w/reinforced frames) (Susp. ht. 11.17")	310	825.00		0
47A500-AN	RTE2-400 w/ transverse torque rods and rubber center bushings (N.A. w/reinforced frames) (Susp. ht. 11.17")	368	1109.00		0
47A700-AL	RS-400 w/ rubber center bushings (Rubber sprung) (Avail. for truck only) (Susp. ht. 10.52")	40	1925.00		0
47KN00-AH	40,000 lb. Cap. Hendrickson 4-Spring				
	HFS-400 — Avail. w/ on-hwy. tractor only (14,600 lb. max. front axle; N.A. w/reinforced frame) (Susp. ht. 10.11")	-153	CR 655.00		0
	40,000 lb. Cap. Hendrickson Air — 52" Axle Spacing				
47KM00-AL	HAS-40LH — With transverse torque rods (12,000 lb. max. Front Axle; 80,000 lbs. max. GCWR) (Not approved for lift axle applications) (N.A. w/reinforced frames)				
	— Avail. w/ on-hwy. tractor only (Incl. I/P mtd. air susp. dump valve) (Susp. ht. 8.50")	-81	319.00		0
	HAS-400 — With transverse torque rods (14,600 lb. max. Front Axle; 55,000 lb. max. GVWR; 120,000 lb. max. GCWR) (Not approved for lift axle applications) (N.A. w/reinforced frames) (Susp. ht. 8.50")				
47KP00-AD	— Avail. w/ on-hwy. truck only	-27	319.00		0
47KP00-AT	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve)	-24	452.00		0
	HAS-402 — With transverse torque rods (Avail. w/16-, 18- or 20,000 lb. Front Axle; Max. 66,000 lb. GVW; Max. 55,000 lb. GVW w/tag or pusher axle in the raised position) (N.A. w/20.5 SM "Inverted-L" reinforced frame; N.A. w/20.25 SM extended frame) (N.A. for severe duty) (Susp. ht. 8.50")				
47KR00-AC	— Avail. w/ truck only (Approved for single lift axle applications) (Site travel rating for tandem axle not to exceed 50,000 lb. on rear susp.)	-13	271.00		0
47KR00-AH	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve)	-10	403.00		0
	40,000 lb. Cap. AirLiner Extra Duty Air Susp. w/ inner wheel chain clearance — 55" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember) (Includes heavy duty axle housing & welded axle seats) (Susp. ht. 8.50") (Avail. w/14,600 lb. max. front axle; max. 40,000 lb. rear axle) (Avail. only w/13.3 SM and 15.9 SM frame) (Refer to the frame chart for GVWR & WB restrictions)				
47L300-AB	— Avail. w/ on-hwy. truck only	N/A	CR 55.00		0
47L300-AE	— Avail. w/ on-hwy. tractor only (Incl. I/P mtd. air susp. dump valve)	N/A	49.00		0

(1) Refer to Appendix for Suspension Applications.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	47 — SUSPENSION, REAR, TANDEM (All susp. hts. listed are for empty condition) (Continued)				
	SUSPENSION, REAR, FOR 40,000 LB. AXLES (Continued)				
	40,000 lb. Cap. AirLiner Extra Duty Air Susp. w/ inner wheel chain clearance — 59" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember) (Includes heavy duty axle housing & welded axle seats) (Susp. ht. 8.50") (Avail. w/14,600 lb. max. front axle; max. 40,000 lb. rear axle) (Avail. only w/13.3 SM and 15.9 SM frame) (Refer to the frame chart for GVWR & WB restrictions)				
47L600-AB	— Avail. w/ on-hwy. truck only	N/A	CR 55.00		0
47L600-AE	— Avail. w/ on-hwy. tractor only (Incl. I/P mtd. air susp. dump valve)	N/A	49.00		0
	40,000 lb. Cap. Hendrickson Steel Walking Beam — 60" Axle Spacing				
47BF00-AK	RT2-400 w/ transverse torque rods and rubber center bushings (Susp. ht. 11.13")	405	1293.00		0
47BG00-AK	RTE2-400 w/ transverse torque rods and rubber center bushings (N.A. w/reinforced frames) (Susp. ht. 11.14")	387	1425.00		0
	40,000 lb. Cap. Hendrickson Air — 60" Axle Spacing				
	HAS-400 w/ transverse torque rods (14,600 lb. max. Front Axle; 55,000 lb. max. GVWR; 120,000 lb. max. GCWR) (Not approved for lift axle applications) (N.A. w/reinforced frames) (Susp. ht. 8.50")				
47KT00-AD	— Avail. w/ on-hwy. truck only	-19	881.00		0
47KT00-AR	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve)	-16	1015.00		0
	46,000 lb. Cap. Neway Air — 54" Axle Spacing				
	AD-246 w/ transverse torque rods (Min. 177" wb) (N.A. w/severe duty) (Susp. ht. 8.75")				
47KV00-AF	— Avail. w/ truck only	138	2103.00		0
47KV00-AN	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve Code 48AC00 & square cut frame ends Code 40EN00)	150	2236.00		0
	46,000 lb. Cap. Neway Air — 60" Axle Spacing				
	AD-246 w/ transverse torque rods (Min. 189" wb) (N.A. w/severe duty) (Susp. ht. 8.75")				
7KW00-AF	— Avail. w/ truck only	138	2405.00		0
47KW00-AN	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve Code 48AC00 & square cut frame ends Code 40EN00)	150	2539.00		0
	SUSPENSION, REAR, FOR 46,000 LB. AXLES				
	46,000 lb. Cap. AirLiner Air Susp. — 51" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember, heavy duty axle housing & welded axle seats) (Susp. ht. 10.0") (Avail. only w/13.3, 15.9, 26.0, 27.0 and 30.0 SM frames) (Refer to the frame chart for GVWR & WB restrictions) (N.A. on severe duty)				
47L700-AB	— Avail. w/ truck only	N/A	151.00		0
47L700-AD	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve Code 48AC00)	N/A	253.00		0

(1) Refer to Appendix for Suspension Applications.

NOTE: All capacity ratings shown represent on-highway application.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	47 — SUSPENSION, REAR, TANDEM (All susp. hts. listed are for empty condition) (Continued)				
	SUSPENSION, REAR, FOR 46,000 LB. AXLES (Continued)				
	46,000 lb. Cap. AirLiner Air Susp. w/inner wheel chain clearance — 55" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember, heavy duty axle housing & welded axle seats) (Susp. ht. 10.0") (Avail. only w/13.3, 15.9, 26.0, 27.0 and 30.0 frames) (Refer to the frame chart for GVWR & WB restrictions)				
47L800-AB	— Avail. w/ truck only	N/A	379.00		0
47L800-AD	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve Code 48AC00)	N/A	481.00		0
	46,000 lb. Cap. AirLiner Air Susp. w/inner wheel chain clearance — 59" axle spacing (1) (Incl. transverse control rods; brake camshaft support brackets & four shock absorbers) (Incl. steel heavy duty susp. ctr. C-channel crossmember, heavy duty axle housing & welded axle seats) (Susp. ht. 10.0") (Avail. only w/13.3, 15.9, 26.0, 27.0 and 30.0 frames) (N.A. for severe duty) (Refer to the frame chart for GVWR & WB restrictions)				
47L900-AB	— Avail. w/ truck only	N/A	379.00		0
47L900-AD	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve Code 48AC00)	N/A	481.00		0
	46,000 lb. Cap. Hendrickson Steel Walking Beam — 54" Axle Spacing				
47BB00-AM	RT2-460 w/ transverse torque rods and rubber center bushings (Susp. ht. 11.37")	73	1111.00		0
47BE00-AL	RS-460 w/ bronze center bushings (Rubber sprung) (Avail. for truck only) (Susp. ht. 10.51")	-200	3100.00		0
	46,000 lb. Cap. Hendrickson Steel Walking Beam — 60" Axle Spacing				
47BH00-AJ	RT2-460 w/ transverse torque rods and rubber center bushings (Susp. ht. 11.36")	86	1275.00		0
	46,000 lb. Cap. Neway Air — 54" Axle Spacing				
	AD-246 w/ transverse torque rods (Min. 177" wb) (N.A. w/severe duty) (Susp. ht. 8.75")				
47KV00-AW	— Avail. w/ truck only	-256	1001.00		0
47KV00-A1	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve Code 48AC00 & square cut frame ends Code 40EN00)	-244	1135.00		0
	46,000 lb. Cap. Neway Air — 60" Axle Spacing				
	AD-246 w/ transverse torque rods (Min. 189" wb) (N.A. w/severe duty) (Susp. ht. 8.75")				
47KW00-A3	— Avail. w/ truck only	-256	1303.00		0
47KW00-AY	— Avail. w/ tractor only (Incl. I/P mtd. air susp. dump valve Code 48AC00 & square cut frame ends Code 40EN00)	-244	1437.00		0
	48 — SUSPENSION EQUIPMENT				
48AC00-AK	Air Suspension Dump Valve — I/P Mounted (Avail. w/trucks w/air rear suspension only; Incl. w/tractors w/air rear suspension; N.A. w/tandem axle when differential main lockout Code 13AW00 is used in comb. w/air slide fifth wheel)	3	133.00	0	0
	50/ 51/ 52/ 53/ 54 — TIRES-WHEELS (See Tire-Wheel Prices tab section for order codes, weights and prices; See Tire/Wheel/Axle Availability tab section for usage; See Component Book, Tires/Wheels/Wheel Equip. Section for other restrictions)				
50ACLO	Standard Tires, Front Two, 275/ 80R 22.5G (14PR) Michelin XZE	—	—	S	S
51ACLO	Standard Tires, Rear Four, 275/ 80R 22.5G (14PR) Michelin XZE	—	—	S	
51ACLO	Eight, 275/ 80R 22.5G (14PR) Michelin XZE	—	—		S
52G000	Standard Wheels, Front Two, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	—	—	S	S
53G000	Standard Wheels, Rear Four, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	—	—	S	
53G000	Eight, 22.5 x 8.25 10-Hole Steel Disc I.S.O. Hub Piloted, Accuride 28487PW	—	—		S

(1) Refer to Appendix for Suspension Applications.

NOTE: All capacity ratings shown represent on-highway application.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	55 — WHEEL & TIRE EQUIPMENT				
55CY00-AD	Hub Covers, Bright (Incl. Bright Nut Covers) (Req. 10-hole disc wheels) (N.A. w/steel wheels in combination w/either alum. hubs or high tensile ferrous hubs) — Front (2) (Avail. w/22.5 x 7.50, 22.5 x 8.25 or 24.5 x 8.25 steel wheels only; Avail. w/22.5 x 8.25 or 24.5 x 8.25 alum. wheels only).....	1	95.00	0	0
55CZ00-AG	— Rear, Single Axle (2) (Avail. w/22.5 x 7.50, 22.5 x 8.25 or 24.5 x 8.25 steel wheels only; Avail. w/22.5 x 8.25 or 24.5 x 8.25 alum. wheels only).....	2	95.00	0	
55CZ00-AH	— Rear, Tandem Axle (4) (Avail. w/22.5 x 7.50, 22.5 x 8.25 or 24.5 x 8.25 steel wheels only; Avail. w/22.5 x 8.25 or 24.5 x 8.25 alum. wheels only).....	5	139.00		0
	Nut Covers, Bright, Threaded (Avail. w/disc wheels only) (N.A. w/steel wheels in combination w/either alum. hubs or high tensile ferrous hubs) (Avail. w/22.5 x 7.50, 22.5 x 8.25 or 24.5 x 8.25 steel wheels only; Avail. w/22.5 x 8.25 or 24.5 x 8.25 alum. wheels only)				
55CW00-AD	— Front (20)	1	51.00	0	0
55CX00-AG	— Rear, Single Axle (20)	1	51.00	0	
55CX00-AH	— Rear, Tandem Axle (40)	2	103.00		0
STD.	Wheels, I.S.O. Steel Disc (Painted "Vendor White" — Not Pure White or Diamond White) (Standard)	—	—	S	S
	56 — TRANSMISSIONS				
	9-Speed Direct (1) Fuller				
56A100-AR	— RT-11609A	12	47.00	0	0
56FN00	— RT-11709H (Standard)	—	—	S	S
56B400-AV	— RT-12609A	14	211.00	0	0
56F100-AR	— RT-12709H	12	211.00	0	0
56GX00-AA	— RT-13609A	19	431.00	0	0
56GH00-AR	— RT-13709H	17	431.00	0	0
56BD00-AV	— RT-14609A	26	608.00	0	0
56F300-AR	— RT-14709H	27	608.00	0	0
	9-Speed Overdrive (1) Fuller				
56A400-AV	— RTX-11609B	0	47.00	0	0
56DE00-AV	— RTX-11609R	0	112.00	0	0
56F000-AR	— RTX-11709H	0	47.00	0	0
56BW00-AV	— RTX-12609B	12	259.00	0	0
56BY00-AV	— RTX-12609R	12	323.00	0	0
56F200-AR	— RTX-12709H	12	259.00	0	0
56GV00-AR	— RTX-13609B	17	477.00	0	0
56FK00-AR	— RTX-13609R	17	540.00	0	0
56HG00-AR	— RTX-13709H	17	477.00	0	0
56BL00-A3	— RTX-14609B	27	655.00	0	0
56DD00-A3	— RTX-14609R	27	719.00	0	0
56F400-AR	— RTX-14709H	27	655.00	0	0
56HF00-AA	— RTX-16709B	38	1651.00	0	0
56HB00-AJ	— RTX-16709H	38	1651.00	0	0
	10-Speed Direct (1) Fuller				
56L200-AR	— RT-11710B	18	NC	0	0
56L300-AR	— RT-12710B	20	211.00	0	0
56L400-AT	— RT-13710B	25	431.00	0	0
56L500-AR	— RT-14710B	37	608.00	0	0

(1) Req. rear trans. supt. Code 57BW00 w/Cum. N14 or DDC-60 eng. for on-off hwy. or severe duty applications.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	56 — TRANSMISSIONS (Continued)				
	10-Speed Direct (C2000 Heavy Duty) (1) Fuller				
56Q300-AA	— FR-11210B	6	109.00	0	0
56Q400-AA	— FR-12210B	6	305.00	0	0
56QM00-AA	— FR-13210B	6	551.00	0	0
56QN00-AA	— FR-14210B	6	795.00	0	0
	10-Speed Direct — Low Inertia (1) Fuller				
56N800-AA	— RTL-11710B	101	771.00	0	0
56N900-AA	— RTL-12710B	101	980.00	0	0
56PA00-AA	— RTL-13710B	101	1199.00	0	0
56PB00-AA	— RTL-14710B	106	1377.00	0	0
	10-Speed Overdrive (1) Fuller				
56MK00-AR	— RTX-11710B	15	47.00	0	0
56LR00-AR	— RTX-11710C	23	47.00	0	0
56P200-AA	— RTO-11908LL	113	1615.00	0	0
56ML00-AR	— RTX-12710B	20	259.00	0	0
56LT00-AR	— RTX-12710C	20	259.00	0	0
56MM00-AR	— RTX-13710B	25	477.00	0	0
56LV00-AR	— RTX-13710C	25	477.00	0	0
56MN00-AT	— RTX-14710B	37	655.00	0	0
56LW00-AR	— RTX-14710C	37	655.00	0	0
56P300-AA	— RTO-14908LL	113	2623.00	0	0
56P400-AA	— RTO-16908LL	113	2723.00	0	0
	10-Speed Overdrive (C2000 Heavy Duty) (1) Fuller				
56Q500-AA	— FRO-11210B	6	259.00	0	0
56Q800-AA	— FRO-11210C	6	259.00	0	0
56Q600-AA	— FRO-12210B	6	459.00	0	0
56Q900-AA	— FRO-12210C	6	459.00	0	0
56Q700-AA	— FRO-13210B	6	703.00	0	0
56RA00-AA	— FRO-13210C	6	703.00	0	0
56QP00-AA	— FRO-14210B	6	880.00	0	0
56P800-AA	— FRO-14210C	6	880.00	0	0
56QQ00-AA	— FRO-15210B	16	1147.00	0	0
56P900-AA	— FRO-15210C	16	1147.00	0	0
56QR00-AA	— FRO-16210B	16	1396.00	0	0
56QA00-AA	— FRO-16210C	16	1396.00	0	0
	10-Speed Overdrive — Low Inertia (1) Fuller				
56L100-AR	— RTLO-11610B	17	589.00	0	0
56LM00-AR	— RTLO-12610B	28	796.00	0	0
56LN00-AR	— RTLO-13610B	37	1007.00	0	0
56LP00-AR	— RTLO-14610B	47	1219.00	0	0
56LL00-AR	— RTLO-15610B	45	1541.00	0	0
56L000-AR	— RTLO-16610B	45	1756.00	0	0

(1) Req. rear trans. supt. Code 57BW00 w/Cum. N14 or DDC-60 eng. for on-off hwy. or severe duty applications.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	56 — TRANSMISSIONS (Continued)				
56QU00-AA	11-Speed Overdrive (1) Fuller — RTO-11909MLL (H-type shift pattern)	83	2847.00	0	0
56QV00-AA	— RTO-14909MLL (H-type shift pattern)	83	3095.00	0	0
56L800-AR	13-Speed Overdrive — Low Inertia (1) Fuller — RTLO-12713A	69	1704.00	0	0
56L900-AR	— RTLO-14713A	69	2173.00	0	0
56MA00-AT	— RTLO-16713A	128	2844.00	0	0
56P500-AA	15-Speed Direct (1) Fuller — RT-14915	107	2139.00	0	0
56P600-AA	15-Speed Overdrive (1) Fuller — RTO-14915	107	2187.00	0	0
56P700-AA	— RTO-16915	107	2991.00	0	0
56NW00-AB	18-Speed Overdrive (1) Fuller — RTLO-18718B	135	3267.00	0	0
56D300-AA	4-Speed Automatic (Avail. w/engs. to & incl. 370 HP, 2000 RPM min.) (Incl. high temp. light, rear trans. supt. Code 57BW00 and pedestal mounted lever type shift control) (Req. Speed/Cruise control delete Code 37LG00) (N.A. w/multi-torque engines; N.A. w/driver dual armrests) (N.A. w/driver swivel seat Code 25AAD0) (See Component Book, Trans. Sect. for max. GVW/GCW) Allison — HT-740	206	12763.00	0	0
56D700-AA	5-Speed Automatic (Avail. w/engs. to & incl. 370 HP, 2000 RPM min.) (Incl. high temp. light, rear trans. supt. Code 57BW00 and pedestal mounted lever type shift control) (Req. Speed/Cruise control delete Code 37LG00) (N.A. w/multi-torque engines; N.A. w/driver dual armrests) (N.A. w/driver swivel seat Code 25AAD0) (See Component Book, Trans. Sect. for max. GVW/GCW) Allison — HT-750	306	16387.00	0	0
56KL00-AB	5-Speed Electronic (Avail. w/electronic engs. to & incl. 370 HP over 1900 RPM) (Incl. rear trans. supt. Code 57BW00 and its restrictions) (Incl. General Utility Max. Feature ECU, "Do Not Shift" light, trans. oil cooler & internal oil filter) (Req. instrument panel mtd. push button control console option 57C400) (N.A. w/Airliner or Hendrickson tandem rear susp.) (Refer to Component Book, Trans. Sect. for further discussion of engine/transmission compatibility) Allison — HD-4050P, Close Ratio	165	13988.00	0	0
56KM00-AB	— HD-4550P, Wide Ratio	165	16535.00	0	0
56KN00-AB	6-Speed Electronic (Avail. w/electronic engs. to & incl. 370 HP over 1900 RPM) (Incl. rear trans. supt. Code 57BW00 and its restrictions) (Incl. General Utility Max. Feature ECU, "Do Not Shift" light, trans. oil cooler & internal oil filter) (Req. instrument panel mtd. push button control console option 57C400) (N.A. w/Airliner or Hendrickson HAS tandem rear susp.) (Refer to Component Book, Trans. Sect. for further discussion of engine/transmission compatibility) Allison — HD-4060P, Close Ratio	165	14607.00	0	0
56KP00-AB	— HD-4560P, Wide Ratio	165	17213.00	0	0
	57 — TRANSMISSION EQUIPMENT				
57AA00-AC	Cooler, Transmission Oil (Avail. w/engines 350 HP & over) (Avail. w/Fuller 11000 thru 14000 series transmission) (Incl. oil pump) (N.A. w/auto. trans.)	6	375.00	0	0
57AA00-AX	Cooler, Transmission Oil (Avail. w/engines 350 HP & over) (Avail. w/Fuller 15000 thru 18000 series transmission) (N.A. w/auto. trans.)	6	180.00	0	0
57C400-AB	Control Console, Push Button (For Allison electronic trans. only) — Instrument Panel Mounted (N.A. w/Message Center Code 26M600 in comb. with I/P mtd. air cleaner restr. gauge Code 26MT00 or brake application air press. gauge Code 26 MP00)	-5	9.00	0	0

(1) Req. rear trans. supt. Code 57BW00 w/Cat. 3406, Cum. N14 or DDC-60 eng. for on-off hwy. or severe duty applications.

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	57 — TRANSMISSION EQUIPMENT (Continued)				
57CE00-AR	ECU, Maximum Feature (<i>Pumper</i>) in lieu of included ECU (For Allison HD electronic trans. only) (Avail. for Fire Truck Pumper applications only) (Refer to Component Book for complete details)	2	265.00	0	0
57BW00-AA	Support, Rear Transmission (Avail. w/Cum. N14 or DDC-60 eng. for on-hwy. applications w/manual trans.) (Required w/Cum. N14 or DDC-60 eng. w/manual trans. for on-off hwy. or severe duty applications) (N.A. w/single horiz. muffler with vert. outlet overframe Codes 32FE00, 32FG00, 32FJ00 or 32FL00) (N.A. w/single horiz. muffler with dual vert. outlets overframe Codes 32FI00 or 32F200)	8	60.00	0	0
57BC00-AB	Synthetic Lube — Mobil 50W Transmission, Manual	0	108.00	0	0
	59 — CHASSIS EQUIPMENT				
59HQ00-AB	Bumper, Front Aluminum, Full Width, Anodized Flat	-44	140.00	0	0
59AL00-AR	Steel, Cut-Off, Painted Med. Titanium	-39	CR 31.00	0	0
59HR00-AA	Steel, Full Width Flat, Chrome Plated	0	300.00	0	0
59HS00	Flat, Painted Med. Titanium (<i>Standard</i>)	—	—	S	S
59HC00-AB	Bumper Extension, Front — 12" Spacer (N.A. w/extended frame, front tow hooks Code 59AB00, driving lights Code 27G800 or fog lights Code 27G700; Avail. w/900 sq. in. cooling module only) (N.A. as 261" wb tandem axle tractor)	23	68.00	0	0
59AB00-BN	Tow Hooks, Front (N.A. w/extended bumper)	27	103.00	0	0
59AC00-AY	Tow Hooks, Rear (Incl. square cut rear frame ends Code 40EN00) (Avail. w/truck only) (N.A. w/outside frame rail mtd. taillights Code 275600) (Req. min. 58" AF w/mud flaps and single rear axle; Req. min. 63" AF w/52" HAS and 51" A/L tandem susp.; Req. min. 75" AF w/60" HAS, A/L 55" and 59" tandem susp. or w/mud flaps on HAS, A/L and HFS and Neway tandem susp.; Req. min. 90" AF w/mud flaps in comb. w/walking beam tandem susp.)	27	103.00	0	0
59AE00-AY	Tow Hooks, Front & Rear (Incl. square cut rear frame ends Code 40EN00) (Avail. w/truck only) (N.A. w/outside frame rail mtd. taillights Code 275600 or extended bumper Code 59HC00) (Req. min. 58" AF w/mud flaps and single rear axle; Req. min. 63" AF w/52" HAS and 51" A/L tandem susp.; Req. min. 75" AF w/60" HAS, A/L 55" and 59" tandem susp. or w/mud flaps on HAS, A/L, HFS and Neway tandem susp.; Req. min. 90" AF w/mud flaps in comb. w/walking beam tandem susp.)	41	207.00	0	0
	60 — EQUIPMENT OPTIONS				
	Fifth Wheels — Avail. w/ tractor package only. — Avail. w/ 10.76, 13.3, or 15.9 SM frames only. — N.A. w/Neway AD-123 single axle air suspension. — Includes outboard mounted angle brackets. — Painted Black only. — L.H. release. — DSO offsets avail. for both stationary and sliding fifth wheels. Additional Restrictions: (Apply only to Fontaine sliders, 36.7" Holland sliders and 24.5" Holland 6.62 height sliders). — w/Forward mounted shallow rect. fuel tank w/ single rear suspension — N.A. w/153" wb w/ 80 gal. fuel tanks — w/Forward mounted deep rect. fuel tank w/ single rear suspension — N.A. w/153" wb w/ 75 gal. R.H. or dual fuel tank w/ between rail batteries — N.A. w/153" wb w/ 100 gal. R.H. or dual fuel tank w/ aft of cab or between rail batteries — N.A. w/165" wb w/ 100 gal. dual fuel tanks w/ aft of cab battery box — w/Forward mounted deep rect. fuel tank w/ tandem rear suspension — N.A. w/153" wb w/ 75 gal. dual fuel tank w/ aft of cab battery box w/ HFS or 52" HAS tandem suspensions				

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	60 — EQUIPMENT OPTIONS (Continued)				
	Fifth Wheels (Continued)				
	<i>Air Slide Fifth Wheels: (Incl. in-cab control) (N.A. w/tandem axle when differential main lockout Code 13AW00 is used in comb. w/air susp. dump valve Code 48AC00)</i>				
	— Fontaine Standard Duty, 24" Air Slide (On-hwy. only)				
60CP00-AB	— 6.75" Height	500	1411.00	0	0
60CR00-AB	— 7.75" Height	506	1411.00	0	0
60CT00-AB	— 8.75" Height	512	1447.00	0	0
	— Fontaine Heavy Duty, 24" Air Slide				
60WL00-AB	— 6.75" Height	588	1501.00	0	0
60WM00-AB	— 7.75" Height	594	1501.00	0	0
60WN00-AB	— 8.75" Height	600	1536.00	0	0
	— Holland 3500, 24.5" Air Slide				
60AGM0-AB	— 6.62" Height (N.A. w/54" Neway tandem susp.)	601	1499.00	0	0
60AGN0-AB	— 7.62" Height	531	1499.00	0	0
60AGP0-AB	— 8.62" Height	536	1533.00	0	0
	— Holland 3500, 36.75" Air Slide (N.A. w/Neway tandem susp.)				
60AGW0-AB	— 7.62" Height	576	1499.00	0	0
60AGX0-AB	— 8.62" Height	581	1533.00	0	0
	— Holland Fleetmaster, 24.5" Air Slide (On-hwy. only)				
60ST00-AB	— 6.62" Height (N.A. w/54" Neway tandem susp.)	529	1499.00	0	0
60PQ00-AB	— 7.62" Height	479	1499.00	0	0
60AGT0-AB	— 8.62" Height	484	1533.00	0	0
	— Holland Fleetmaster, 36.75" Air Slide (On-hwy. only) (N.A. w/54" Neway tandem susp.)				
60AGU0-AB	— 7.62" Height	512	1499.00	0	0
60AGV0-AB	— 8.62" Height	517	1533.00	0	0
	Manual Slide Fifth Wheels				
	— Fontaine Standard Duty, 24" Manual Slide (On-hwy. only)				
60AGY0-AB	— 6.75" Height	496	1351.00	0	0
60CX00-AB	— 7.75" Height	502	1351.00	0	0
60CY00-AB	— 8.75" Height	508	1387.00	0	0
	— Holland 3500, 24.5" Manual Slide				
60AG20-AB	— 6.62" Height (N.A. w/54" Neway tandem susp.)	601	1464.00	0	0
60AG30-AB	— 7.62" Height	531	1464.00	0	0
60AG40-AB	— 8.62" Height	536	1500.00	0	0
	— Holland Fleetmaster, 24.5" Manual Slide (On-hwy. only)				
60FU00-AB	— 6.62" Height (N.A. w/54" Neway tandem susp.)	521	1464.00	0	0
609Q00-AB	— 7.62" Height	483	1464.00	0	0
60AG10-AB	— 8.62" Height	488	1500.00	0	0
	Stationary Fifth Wheels				
	— Stationary Fifth Wheel offsets are 6" ahead of Rear Axle centerline.				
	— Holland 3500, Stationary				
60AGJ0-AB	— 6.62" Height	376	997.00	0	0
60AGK0-AB	— 7.62" Height	381	997.00	0	0
60AGL0-AB	— 8.62" Height	386	1039.00	0	0
	— Holland Fleetmaster, Stationary (On-hwy. only)				
60AGQ0-AB	— 6.62" Height	324	997.00	0	0
60AGR0-AB	— 7.62" Height	330	997.00	0	0
60AGS0-AB	— 8.62" Height	328	1039.00	0	0
60AHM0-AB	Mud Flaps, Front (Recommended w/fwd. mtd. alum. cyl. fuel tanks)	5	51.00	0	0

L / LT9501 — 101" BBC

HEAVY DUTY DIESEL — OPTIONAL EQUIPMENT

COMPONENT DESCRIPTION		WEIGHT (LB.)	SUGGESTED LIST PRICE (U.S. Dollars)	4x2	6x4
SALES CODE	60 — EQUIPMENT OPTIONS (Continued)				
60AAM0-AB	Mud Flaps, Rear Fleetliner, Black Rubber (<i>Incl. tapered brackets</i>) — Avail. w/ truck only	36	111.00	0	0
60AAM0-AG	— Avail. w/ tractor only	18	111.00	0	0
60AAN0-AB	Fleetliner, White Rubber (<i>Incl. stainless brackets</i>) — Avail. w/ truck only	28	175.00	0	0
60AAN0-AG	— Avail. w/ tractor only	10	175.00	0	0
60AAK0-AB	Quarter Fenders (<i>Req. dual fuel tanks & between the rails battery box w/148" wb. tandem susp.</i>) (<i>Avail. w/tractor only</i>) (<i>Refer to Quarter Fenders Restriction charts in the Appendix at the end of this model for additional wheelbase restrictions</i>) Fleetliner, Black Ultra Rubber	24	161.00	0	0
60AAL0-AB	Fleetliner, Stainless Steel	32	243.00	0	0
	62 — MISCELLANEOUS OPTIONS				
62AF00-BW	Puerto Rico Delivery (<i>Avail. for export only</i>)	0	NC	0	0

101" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT9501 Heavy Duty Diesel (4x2 & 6x4)
FORWARD MTD. FUEL TANK

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX
					LH (29KE00) Standard Weight (29KD00) Light Weight (1)	RH (29LG00 Standard Weight (29LJ00) Light Weight (1)	LH (29KF00) (N.A. w/4-battery system) LH & RH (29LL00) (Req. 4-battery system)	(29KH00) (Avail. w/Tractor only, 207" wb max. and 13,000 lb. front axle max; N.A. w/HD trans w/tanden axle; N.A. w/severe duty
SHALLOW RECTANGULAR								
45 gal. (Clean CA)	RH LH	43PA00 43N900	N/A	N/A	Not Available w/LH fuel tanks	Not Available w/RH fuel tanks	Not Available	Not Available
55 gal.	RH LH Dual	43L700 43L800 43L900	N/A	N/A	Not Available w/LH or dual fuel tanks Req. min. 177" wb w/ A/L tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 177" wb w/ A/L tandem susp.	Req. min. 165" wb w/All Neway, Walking beam, HFS, HAS, tandem susp. Req. min. 177" wb w/ A/L tandem susp.	Req. min. 153" wb w/ 52" or Neway and A/L single rear susp. Req. min. 165" wb w/52" HAS tandem susp. Req. min. 177" wb w/walking beam, 60" HAS, HFS or Neway and all A/L tandem susp. N.A. w/189" or 207"wb w/walking beam tandem susp.
80 gal.	RH LH Dual	43MB00 43MA00 43MC00	N/A	N/A	Not Available w/LH or dual fuel tanks Req. min. 153" wb w/ all Neway, Walking beam, HFS, HAS, tandem susp. Req. min. 177" wb w/ A/L tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 153" wb w/all Neway, Walking beam, HFS, HAS, tandem susp. Req. min. 177" wb w/ A/L tandem susp.	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/Walking beam, HAS or HFS tandem susp. Req. min. 189" wb w/Neway tandem susp.	Req. min. 153" wb w/ 52" or Neway and A/L single rear susp. Req. min. 165" wb w/52" HAS tandem susp. Req. min 177" wb w/walking beam, 60" HAS, HFS or Neway and A/L tandem susp. N.A. w/189" or 207" wb w/walking beam tandem susp.
DEEP RECTANGULAR								
60 gal. (Clean CA)	RH LH	43PE00 43PD00	N/A	N/A	Not Available w/LH fuel tanks	Not Available w/RH fuel tanks	Not Available	Not Available
75 gal.	RH LH Dual	43M100 43M000 43M200	N/A	N/A	Not Available w/LH or dual fuel tanks Req. min. 153" wb w/Neway tandem susp. Req. min. 177" wb w/ A/L tandem susp.	Not Available w/RH or dual fuel tanks Req. min. 153" wb w/Neway tandem susp. Req. min. 177" wb w/ A/L tandem susp.	Req. min. 165" wb w/ all Neway, Walking beam, HFS, HAS, tandem susp. Req. min. 177" wb w/ A/L tandem susp.	Req. min. 153" wb w/ 52" or Neway and A/L single rear susp. Req. min. 165" wb w/52" HAS tandem susp. Req. min. 177" wb w/walking beam, 60" HAS, HFS or Neway and A/L tandem susp. N.A. w/189" or 207" wb w/walking beam tandem susp.
100 gal.	RH LH Dual	43M400 43N000 43M500	N/A	N/A	Not Available w/LH or dual fuel tanks Not avail. w/severe duty applications Req. min. 165" wb w/Neway tandem susp. Req. min. 177" wb w/ A/L tandem susp.	Not Available w/RH or dual fuel tanks Not avail. w/severe duty applications Req. min. 165" wb w/Neway tandem susp. Req. min. 177" wb w/ A/L tandem susp.	Req. min. 153" wb w/all single rear susp. Not avail. w/severe duty applications Req. min. 177" wb w/walking beam, HAS or HFS and A/L tandem susp. Req. min. 189" wb w/Neway tandem susp.	Req. min. 153" wb w/ 52" or Neway and A/L single rear susp. Not avail. w/severe duty applications Req. min. 165" wb w/52" HAS tandem susp. Req. min. 177" wb w/walking beam, 60" HAS, HFS or Neway and A/L tandem susp. N.A. w/189" or 207" wb w/walking beam tandem susp.

(1) Req. min. 153" wb w/Walking beam, HAS or HFS tandem susps. w/4-Batteries/1 Box system
Req. min. 165" wb w/Neway tandem susp. w/4-Batteries/1 Box system

101" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT9501 Heavy Duty Diesel (4x2 & 6x4)
LH TANK REAR MTD - RH TANK FORWARD MTD MIXED FUEL TANKS

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX
					LH (29KE00) Standard Weight (29KD00) Light Weight (N.A. w/4-battery system)	RH (29LG00) Standard Weight (29LJ00) Light Weight	LH (29KF00) (N.A. w/4-battery system) LH & RH (29LL00) (Req. 4-battery system)	(29KH00) (Avail. w/Tractor only, and 207" wb max.)
SHALLOW MIXED RECTANGULAR								
30 gal. LH, 55 gal. RH	Mixed	43MD00	N/A	N/A	Req. min. 153" wb w/Neway tandem susp. Req. min. 177" wb w/ A/L tandem susp.	Not Available	Not Available	Not Available
55 gal. LH, 80 gal. RH	Mixed	43ME00	N/A	N/A	Req. min. 153" wb w/all Neway, Walking beam, HFS, HAS, tandem susp. Req. min. 177" wb w/ A/L tandem susp.	Not Available	Not Available	Not Available
DEEP MIXED RECTANGULAR								
50 gal. LH, 75 gal. RH	Mixed	43M600	N/A	N/A	Req. min. 153" wb w/all Neway, Walking beam, HFS, HAS, tandem susp. Req. min. 177" wb w/ A/L tandem susp.	Not Available	Not Available	Not Available
75 gal. LH, 100 gal. RH	Mixed	43M700	N/A	N/A	Not avail. w/severe duty applications Req. min. 153" wb w/all Neway, Walking beam, HFS, HAS, tandem susp. Req. min. 177" wb w/ A/L tandem susp.	Not Available	Not Available	Not Available

101" BBC
FUEL TANK - BATTERY BOX - WHEELBASE RESTRICTIONS
L/LT9501 Heavy Duty Diesel (4x2 & 6x4)
REAR MTD. FUEL TANK

The chart below indicates fuel tank/wheelbase restrictions by battery box mounting. Combination is not restricted unless indicated.
It is also necessary to verify fuel tank/battery box/wheelbase restrictions identified on the exhaust system charts

FUEL TANK		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX		AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX
					LH (29KE00) Standard Weight (29KD00) Light Weight (N.A. w/4-battery system)	LH& RH (29LH00 Standard Weight (29LK00) Light Weight (Req. 4-battery system)	LH (29KF00) (N.A. w/4-battery system) LH & RH (29LL00) (Req. 4-battery system)	(29KH00) (Avail. w/Tractor only and 207" wb max.)
SHALLOW RECTANGULAR								
55 gal.	RH LH Dual	43L700 43L800 43L900	N/A	N/A	Req. min. 165" wb w/all Neway, Walking beam, HFS, HAS, tandem susp. Req. min. 177" wb w/ A/L tandem susp.	Req. min. 165" wb w/all Neway, Walking beam, HFS, HAS, tandem susp. Req. min. 177" wb w/ A/L tandem susp.	Not Available	Not Available
80 gal.	RH LH Dual	43MB00 43MA00 43MC00	N/A	N/A	Req. min. 153" wb w/all single susp. Req. min. 177" wb w/all tandem susp.	Req. min. 153" wb w/all single susp. Req. min. 177" wb w/all tandem susp.	Not Available	Not Available
DEEP RECTANGULAR								
50 gal.	RH LH Dual	43MX00 43MW00 43MY00	N/A	N/A	Req. min. 153" wb w/all tandem susp.	Req. min. 153" wb w/all tandem susp.	Not Available	Not Available
75 gal.	RH LH Dual	43M100 43M000 43M200	N/A	N/A	Not Available w/153" wb & single rear axle in comb. w/14,600 lb. FA thru 20,000 lb. FA or w/severe duty applications Req. min. 153" wb w/52" or 54" HAS & HFS tandem susp. Req. min. 165" wb w/walking beam, all Neway tandem & 60" HAS tandem susp. Req. min. 177" wb w/ A/L tandem susp.	Not Available w/153" wb & single rear axle in comb. w/14,600 lb. FA thru 20,000 lb. FA or w/severe duty applications Req. min. 153" wb w/52" or 54" HAS & HFS tandem susp. Req. min. 165" wb w/walking beam, all Neway tandem & 60" HAS tandem susp. Req. min. 177" wb w/ A/L tandem susp.	Not Available	Not Available
100 gal.	RH LH Dual	43M400 43N000 43M500	N/A	N/A	Req. min. 177" wb w/all tandem susp. Req. min. 153" wb w/ A/L tandem susp.	Req. min. 177" wb w/all tandem susp. Req. min. 153" wb w/ A/L tandem susp.	Not Available	Not Available

101" BBC
EXHAUST RESTRICTIONS
L/LT9501 Heavy Duty Diesel (4x2 & 6x4) EXHAUST AVAIL.
FORWARD MTD FUEL TANKS

The chart below indicates exhaust restrictions by engine. Combination is not restricted unless indicated.

EXHAUST	CAT. C10, C12 CAT. 3306	CUM. N14 DDC-60
Single Horizontal Muffler & Pipe 32FD00 Req. 2-battery system when between-frame-rails battery box code 29KH00 is selected; N.A. w/HD or HT auto trans in comb. w/RH or dual/mixed deep rect. fuel tanks; N.A. w/4-battery system aft-of-cab.	Req.min. 177" wb w/single susp. Req. min 189" wb w/walking beam, HFS or HAS tandem susp. Req. min. 207" wb w/Neway and Airliner tandem susp.	Req. min. 177" wb w/single susp. Req. min. 207" wb w/tandem susp.
Single Horizontal Muffler & Vertical Outlet (Cab Mtd.) (over frame) 32FE00, 32FG00 Req. 2-battery system when between-frame-rails battery box code 29KH00 is selected; N.A. w/HD or HT auto trans in comb. w/RH or dual/mixed deep rect. fuel tanks; N.A. w/4-battery system aft-of-cab; RH 4-battery/1 box Avail w/Cat 3306 (Mech.) engine only;	Req.min. 177" wb w/single susp. Req. min 189" wb w/walking beam or HAS tandem susp. Req. min. 207" wb w/Neway and Airliner tandem susp. Req. min. 177" wb w/HFS tandem susp.	Req. min. 177" wb w/single susp. Req. min. 207" wb w/tandem susp. N.A. w/manual trans. w/on-off highway or severe duty
Single Horizontal Muffler & Vertical Outlet (Cab Mtd.) (under frame) 32FF00, 32FH00 Req. 2-battery when between-frame-rails battery box code 29KH00 is selected; N.A. w/RH or dual/mixed fuel tanks; N.A. w/RH 4-battery/1 box system; N.A. w/4-battery system aft-of-cab	Req.min. 177" wb w/single susp. Req. min 189" wb w/walking beam or HAS tandem susp. Req. min. 207" wb w/Neway and Airliner tandem susp. Req. min. 177" wb w/HFS tandem susp.	Req. min. 177" wb w/single susp. Req. min. 207" wb w/tandem susp.
Single Horizontal Muffler & Vertical Outlet (Frame Mtd.) (over frame) 32FJ00, 32FL00 Req. 2-battery system when between-frame-rails box code 29KH00 is selected; N.A. w/any 75 gal. fuel tanks, mixed 30/55, 50/75 or 55/80 gal. fuel tanks; N.A. w/4-battery system aft-of-cab; RH 4-battery/1 box Avail w/Cat 3306 (Mech.) engine only; N.A w/HD or HT auto. trans. in comb. w/RH or dual/mixed deep rect. fuel tanks	Req.min. 177" wb w/single susp. Req. min 189" wb w/walking beam or HAS tandem susp. Req. min. 207" wb w/Neway and Airliner tandem susp. Req. min. 177" wb w/HFS tandem susp.	Req. min. 177" wb w/single susp. Req. min. 207" wb w/tandem susp. N.A. w/manual trans. w/on-off highway or severe duty
Single Horizontal Muffler & Vertical Outlet (Frame Mtd.) (under frame) 32FK00, 32FM00 Req 2-battery system when between-frame-rails battery box code 29KH00 is selected. N.A. w/any 75 gal. fuel tank; N.A. w/RH or dual/ mixed fuel tanks; N.A. w/4 Battery system aft-of-cab	Req.min. 177" wb w/single susp. Req. min 189" wb w/walking beam or HAS tandem susp. Req. min. 207" wb w/Neway and Airliner tandem susp. Req. min. 177" wb w/HFS tandem susp.	Req. min. 177" wb w/single susp. Req. min. 207" wb w/tandem susp.
Single Horizontal Muffler & Dual Vertical Outlet (Cab Mtd.) (over frame) 32F100 Req. 2-battery system when bewteen-frame-rails battery box code 29KH00 is selected; RH 4-battery/1 box Avail. w/Cat 3306 (Mech.) engine only. N.A. w/LH 4-battery/1 box system; N.A w/HD or HT auto. trans. in comb. w/RH or dual/mixed deep rect. fuel tanks; N.A. w/4-battery system aft-of-cab	Req. min. 177" wb w/single susp. Req. min. 177" wb w/HFS tandem susp. Req. min, 189" wb w/walking beam or HAS tandem susp. Req. min. 207" wb w/Neway and Airliner tandem susp.	Req. min. 177" wb w/single susp. Req. min. 207" wb w/tandem susp. N.A. w/manual trans. w/on-off highway or severe duty

Continued on next page

101" BBC
EXHAUST RESTRICTIONS
L/LT9501 Heavy Duty Diesel (4x2 & 6x4) EXHAUST AVAIL.
FORWARD MTD FUEL TANKS (continued)

The chart below indicates exhaust restrictions by engine. Combination is not restricted unless indicated.

EXHAUST	CAT. C10, C12 CAT. 3306	CUM. N14 DDC-60
Single Horizontal Muffler & Dual Vertical Outlet (Frame Mtd.) (over frame) 32F200 Req. 2-battery system when between-frame-rails battery box code 29KH00 is selected; N.A. w/LH 4-battery/1 box system; N.A. w/4-battery system aft-of-cab; RH 4-battery/1 box Avail. w/Cat 3306 (Mech.) engine only; N.A. w/any 75 gal. fuel tanks, mixed 30/55, 50/75 or 55/80 gal fuel tanks; N.A. w/HD or HT auto trans. in comb. w/RH or dual/mixed deep rect. fuel tanks	Req. min. 177" wb w/single susp. Req. min. 177" wb w/HFS tandem susp. Req. min. 189" wb w/walking beam or HAS tandem susp. Req. min. 207" wb w/Neway and Airliner tandem susp.	Req. min. 177" wb w/single susp. Req. min. 207" wb w/tandem susp. N.A. w/manual trans. w/on-off highway or severe duty
Single Vertical Muffler & Vertical Outlet (Cab Mtd.) 32FW00, 32FX00 N.A. w/RH Clean CA;	Not Restricted to engines	Not Restricted to engines
Single Vertical Muffler & Vertical Outlet (Frame Mtd.) 32FY00, 32F000 N.A. w/75 gal. fuel tank, mixed 50/75, 30/55 or 55/80 gal. fuel tanks; N.A. w/80 gal. shallow RH or dual rectangular tanks; N.A. w/55 gal. fuel tanks; N.A. w/RH Clean CA.	Not Restricted to engines	Not Restricted to engines
Single Transverse Muffler & Horizontal Outlet (under frame) 32FN00 N.A. w/ RH 4-battery box; N.A. w/RH or dual/mixed fuel tanks; Req. min. 165" wb w/single axle and 189" wb w/tandem axles; N.A. w/4-battery system aft-of-cab.	Not Restricted to engines	Not Restricted to engines
Single Transverse Muffler & Vertical Outlet (Cab Mtd.) 32FP00, 32FR00 N.A. w/RH or dual/mixed fuel tanks; N.A. w/RH 4-battery box; Req. min. 153" wb w/single axle and 177" wb w/tandem axles. N.A. w/4-battery system aft-of-cab.	Not Restricted to engines	Not Restricted to engines

101" BBC
EXHAUST RESTRICTIONS
L/LT9501 Heavy Duty Diesel (4x2 & 6x4) EXHAUST AVAIL.
REAR MTD FUEL TANKS

The chart below indicates exhaust restrictions by engine. Combination is not restricted unless indicated.

EXHAUST	CAT. C10, C12 CAT. 3306	CUM. N14 DDC-60
Single Horizontal Muffler & Pipe 32FD00 N.A. w/HD or HT auto trans in comb. w/RH or dual/mixed deep rect. fuel tanks;	Req. min. 177" wb w/single susp. Req. min. 189" w/walking beam, HFS or HAS tandem susp. Req. min. 207" wb w/Neway and Airliner tandem susp.	Req. min. 177" wb w/single susp. Req. min. 207" wb w/tandem susp.
Single Horizontal Muffler & Vertical Outlet (Cab Mtd.) (over frame) 32FE00, 32FG00 N.A. w/HD or HT auto trans. in comb. w/deep rectangular RH or dual/mixed fuel tanks	Req. min. 177" wb w/single susp. Req. min. 189" w/walking beam or HAS tandem susp. Req. min. 207" wb w/Neway and Airliner tandem susp. Req. min. 177" wb w/HFS tandem susp.	Req. min. 177" wb w/single susp. Req. min. 207" wb w/tandem susp. N.A. w/manual trans. w/on-off highway or severe duty
Single Horizontal Muffler & Vertical Outlet (Cab Mtd.) (under frame) 32FF00, 32FH00 N.A. w/RH or dual/mixed fuel tanks	Req. min. 177" wb w/single susp. Req. min. 189" w/walking beam or HAS tandem susp. Req. min. 207" wb w/Neway and Airliner tandem susp. Req. min. 177" wb w/HFS tandem susp.	Req. min. 177" wb w/single susp. Req. min. 207" wb w/tandem susp.
Single Horizontal Muffler & Vertical Outlet (Frame Mtd.) (over frame) 32FJ00, 32FL00 N.A. w/50 gal. fuel tanks; N.A. w/mixed 50/75, 30/55 or 55/80 gal. fuel tanks; N.A. w/HD or HT auto trans. in comb. w/deep rectangular RH or dual/mixed fuel tanks	Req. min. 177" wb w/single susp. Req. min. 189" w/walking beam or HAS tandem susp. Req. min. 207" wb w/Neway and Airliner tandem susp. Req. min. 177" wb w/HFS tandem susp.	Req. min. 177" wb w/single susp. Req. min. 207" wb w/tandem susp. N.A. w/manual trans. w/on-off highway or severe duty
Single Horizontal Muffler & Vertical Outlet (Frame Mtd.) (under frame) 32FK00, 32FM00 N.A. w/50 gal. fuel tanks; N.A. w/RH or dual/mixed fuel tanks	Req. min. 177" wb w/single susp. Req. min. 189" w/walking beam or HAS tandem susp. Req. min. 207" wb w/Neway and Airliner tandem susp. Req. min. 177" wb w/HFS tandem susp.	Req. min. 177" wb w/single susp. Req. min. 207" wb w/tandem susp.
Single Horizontal Muffler & Dual Vertical Outlet (Cab Mtd.) (over frame) 32F100 N.A. w/MD or HT auto. trans in comb. w/deep rectangular RH or dual/mixed fuel tanks	Req. min. 177" wb w/single susp. Req. min. 177" wb w/HFS tandem susp. Req. min. 189" w/walking beam or HAS tandem susp. Req. min. 207" wb w/Neway and Airliner tandem susp.	Req. min. 177" wb w/single susp. Req. min. 207" wb w/tandem susp. N.A. w/manual trans. w/on-off highway or severe duty
Single Horizontal Muffler & Dual Vertical Outlet (Frame Mtd.) (over frame) 32F200 N.A. w/50 gal. fuel tanks; N.A. w/ mixed 50/75, 30/55 or 55/80 gal fuel tanks; N.A. w/MD or HT auto. trans in comb. w/deep rectangular RH or dual/mixed fuel tanks	Req. min. 177" wb w/single susp. Req. min. 177" wb w/HFS tandem susp. Req. min. 189" w/walking beam or HAS tandem susp. Req. min. 207" wb w/Neway and Airliner tandem susp.	Req. min. 177" wb w/single susp. Req. min. 207" wb w/tandem susp. N.A. w/manual trans. w/on-off highway or severe duty
Single Vertical Muffler & Vertical Outlet (Cab Mtd.) 32FW00, 32FX00 N.A. w/RH clean CA fuel tanks	Not Restricted to engines	Not Restricted to engines
Single Vertical Muffler & Vertical Outlet (Frame Mtd.) 32FY00, 32F000 N.A. w/50 gal. fuel tank, N.A. w/mixed 50/75, 30/55 or 55/80 gal. fuel tanks. N.A. w/55 gal. shallow RH or dual rect. tanks; N.A w/RH clean CA fuel tanks	Not Restricted to engines	Not Restricted to engines

Continued on next page

101" BBC
EXHAUST RESTRICTIONS
L/LT9501 Heavy Duty Diesel (4x2 & 6x4) EXHAUST AVAIL.
REAR MTD FUEL TANKS (continued)

The chart below indicates exhaust restrictions by engine. Combination is not restricted unless indicated.

EXHAUST	CAT. C10, C12 CAT. 3306	CUM. N14 DDC-60
Single Transverse Muffler & Horizontal Outlet (under frame) 32FN00 Req. min. 165" wb w/single axle; Req. min. 189" wb w/tandem axles; N.A. w/RH or dual/mixed fuel tanks	Not Restricted to engines	Not Restricted to engines
Single Transverse Muffler & Vertical Outlet (Cab Mtd.) 32FP00, 32FR00 Req. min. 153" wb w/single axle; Req. min. 177" wb w/tandem axle; N.A. w/RH or dual/mixed fuel tanks	Not Restricted to engines	Not Restricted to engines

101" BBC
QUARTER FENDER* RESTRICTIONS
(Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/LT9501 Heavy Duty Diesel (4x2 & 6x4)
FORWARD MTD. FUEL TANK

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

		Steel	Alum.	Po. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
SHALLOW RECTANGULAR								
55 gal.	RH LH Dual	43L700 43L800 43L900	N/A	N/A	Req. min. 165" wb w/all tandem susp. Req. min. 177" wb w/Airliner tandem susp.	Req. min. 165" wb w/all tandem susp.	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/all tandem susp.	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/all tandem susp. Req. min. 189" wb w/Airliner tandem susp.
80 gal.	RH LH Dual	43MB00 43MA00 43MC00	N/A	N/A	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/all tandem susp.	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/all tandem susp. Req. min. 189" wb w/Airliner 55" and 59" tandem susp.	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/all tandem susp.	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/all tandem susp. Req. min. 189" wb w/Airliner tandem susp.
DEEP RECTANGULAR								
75 gal.	RH LH Dual	43M100 43M000 43M200	N/A	N/A	Req. min. 165" wb w/all tandem susp. Req. min. 177" wb w/Airliner 55" and 59" tandem susp.	Req. min. 165" wb w/all tandem susp.	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/all tandem susp.	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/all tandem susp. Req. min. 189" wb w/Airliner tandem susp.
100 gal.	RH LH Dual	43M400 43N000 43M500	N/A	N/A	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/all tandem susp. Req. min. 189" wb w/Airliner 55" and 59" tandem susp.	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/all tandem susp. Req. min. 189" wb w/Airliner 55" and 59" tandem susp.	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/all tandem susp.	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/all tandem susp. Req. min. 189" wb w/Airliner tandem susp.

* Avail. w/Tractor only.

101" BBC
QUARTER FENDER* RESTRICTIONS
(Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/LT9501 Heavy Duty Diesel (4x2 & 6x4)
LH TANK REAR MTD. - RH TANK FORWARD MTD.

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
SHALLOW MIXED RECTANGULAR								
30 gal. LH, 55 gal. RH	Mixed	43M000	N/A	N/A	Req. min. 165" wb w/all tandem susp. Req. min. 177" wb w/Airliner tandem susp.	Not Available	Not Available	Req. min. 177" wb w/all tandem susp. Req. min. 189" wb w/Airliner tandem susp.
55 gal. LH, 75 gal. RH	Mixed	43ME00	N/A	N/A	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/all tandem susp.	Not Available	Not Available	Req. min. 177" wb w/all tandem susp. Req. min. 189" wb w/Airliner tandem susp.
DEEP MIXED RECTANGULAR								
50 gal. LH, 75 gal. RH	Mixed	43M600	N/A	N/A	Req. min. 165" wb w/all tandem susp.	Not Available	Not Available	Req. min. 177" wb w/all tandem susp. Req. min. 189" wb w/Airliner tandem susp.
75 gal. LH, 100 gal. RH	Mixed	43M700	N/A	N/A	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/all tandem susp.	Not Available	Not Available	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/all tandem susp. Req. min. 189" wb w/Airliner tandem susp.

* Avail. w/Tractor only.

101" BBC
QUARTER FENDER* RESTRICTIONS
(Restrictions are in addition to Fuel Tank and Exhaust Charts restrictions)
L/LT9501 Heavy Duty Diesel (4x2 & 6x4)
REAR MTD. FUEL TANK

The chart below indicates quarter fender installation restrictions by fuel tank, battery box and back of cab access pkg.

		Steel	Alum.	Pol. Alum.	UNDER CAB BATTERY BOX	AFT-OF-CAB BATTERY BOX	BETWEEN RAILS BATTERY BOX	BACK OF CAB ACCESS PKG. (These restrictions apply only when B.O.C. is selected)
SHALLOW RECTANGULAR								
55 gal.	RH LH Dual	43L700 43L800 43L900	N/A	N/A	Req. min. 165" wb w/all tandem susp. Req. min. 177" wb w/Airliner tandem susp.	Not Available	Not Available	Req. min. 153" wb w/single rear susp. Req. min. 177" wb w/tandem susp. Req. min. 189" wb w/Airliner tandem susp.
80 gal.	RH LH Dual	43MB00 43MA00 43MC00	N/A	N/A	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/52" or 54" walking beam, 52" HFS, HAS or Neway or 51" Airliner tandem susp. Req. min. 189" wb w/60" walking beam or 60" HAS or Airliner 55" and 59" tandem susp.	Not Available	Not Available	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/52" or 54" walking beam, 52" HFS, HAS or Neway tandem susp. Req. min. 189" wb w/60" walking beam, 60" HAS or Airliner tandem susp.
DEEP RECTANGULAR								
50 gal.	RH LH Dual	43MX00 43MW00 43MY00	N/A	N/A	Req. min. 165" wb w/52" or 54" walking beam; 52" HFS, HAS or Neway or 51" Airliner tandem susp. Req. min. 177" wb w/60" walking beam or 60" HAS or Airliner 55" and 59" tandem susp.	Not Available	Not Available	Req. min. 153" wb w/single rear susp. Req. min. 177" wb w/tandem susp. Req. min. 189" wb w/Airliner tandem susp.
75 gal.	RH LH Dual	43M100 43M000 43M200						
100 gal.	RH LH Dual	43M400 43N000 43M500	N/A	N/A	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/52" or 54" walking beam, 52" HFS, HAS or Neway or 51" Airliner tandem susp. Req. min. 189" wb w/60" walking beam or 60" HAS or Airliner 55" and 59" tandem susp.	Not Available	Not Available	Req. min. 153" wb w/all single rear susp. Req. min. 177" wb w/52" or 54" walking beam, 52" HFS, HAS or Neway tandem susp. Req. min. 189" wb w/60" walking beam, 60" HAS and A/L tandem susp.

* Avail. w/Tractor only.

101" BBC
AIRLINER SINGLE DRIVE SUSPENSION APPLICATIONS
L9501 Heavy Duty Diesel (4x2)

Application	Codes	23,000 Lbs.
Body (1) (Truck or Drom)	AAAG00 AAAG00	All OK except: Mixer (Construction-Concrete Mixer) Mixer with Lifiable Tag axle
Trailer (2) (Tractor or Truck)		All OK
Expected Terrain	ACAD00 ACAA00 ACAB00	100% On-Highway Max. 10% Off-Highway Max. 25% Off-Highway
Most Severe Road Surface	ADAA00 ADAB00 ADAD00 ADAE00 ADAC00 ADAF00 ADAG00	Excellent Highway Smooth Concrete or Asphalt (Typical Highway) Packed Clay-Bound Gravel Hard Packed Natural Soil Rough Concrete or Asphalt (Broken Concrete) Maintained Gravel (Packed Gravel) Soft Soil/Mud/Debris (Landfill) (Spongy Natural Soil)
Where Domiciled		All OK
Maximum Expected GCW		115,000 lbs. and less
Maximum Total Pusher/Tag Axle GAWR		20,000 lbs. and less

- (1) Mandatory to also select Vehicle Designation Code AAACOO (Truck)
(2) Mandatory to also select Vehicle Designation Code AAABOO (Tractor) or
Code AAADOO (Truck w/Trailer)

101" BBC
AIRLINER TANDEM DRIVE SUSPENSION APPLICATIONS
LT9501 Heavy Duty Diesel (6x4)

Application	Codes	40,000 lbs. EXTRA DUTY	Codes	46,000 lbs.
Body (1) (Truck or Drom)	AABH00 AAAL00 AABH00 AABJ00 AAAM00	Attic Van Only Car/Truck Carrier Body Only (Linehaul-Auto Transport) Dry Van Body Only Flatbed Only (Linehaul-Flat Bed) Reefer Van Body Only	AAAG00 AAAG00 AAA100	All OK except: Mixer (Construction-Concrete Mixer) Mixer with Liftable tag axle Severe Duty (Mixer)
Trailer (2) (Tractor or Truck)	AAA400 AAA500	Tank Only (Bulk Hauler-Dry) Tank Only (Bulk Hauler-Liquid) All OK		All OK
Expected Terrain			ACAD00 ACAA00 ACAB00	100% On-Highway Max. 10% Off-Highway Max. 25% Off-Highway
Most Severe Road Surface	ACAD00 ACAA00 ADAA00 ADAB00 ADAC00 ADAF00	100% On-Highway Max. 10% Off-Highway Domiciled USA Excellent Highway Smooth Concrete or Asphalt (Typical Highway) Rough Concrete or Asphalt (Broken Concrete) Maintained Gravel Domiciled USA or Canada only (Packed Gravel)	ADAA00 ADAB00 ADAD00 ADAE00 ADAC00 ADAF00 ADAG00	Excellent Highway Smooth Concrete or Asphalt (Typical Highway) Packed Clay-Bound Gravel Hard Packed Natural Soil Rough Concrete or Asphalt (Broken Concrete) Maintained Gravel (Packed Gravel) Soft Soil/Mud/Debris (Landfill) (Spongy Natural Soil)
Where Domiciled		USA 50 St. Only		All OK
Maximum Expected GCW		USA 49 St. Only Canada Only (See Export Note) 120,000 lbs. and less domiciled in Canada		180,000 lbs. and less
Maximum Total Pusher/Tag Axle GAWR		140,000 lbs. and less domiciled in USA 100,000 lbs. and less Export		24,000 lbs. and less
Bulk Commodity or High Load Factor Truck w/out Trailer		12,000 lbs. and less OK		OK

(1) Mandatory to also select Vehicle Designation Code AAAC00 (Truck).

(2) Mandatory to also select Vehicle Designation Code AAAB00 (Tractor) or Code AAAD00 (Truck w/Trailer).

Export Note: For export, the AirLiner 40,000 lb. EXTRA DUTY suspension is restricted to on-highway only.